



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

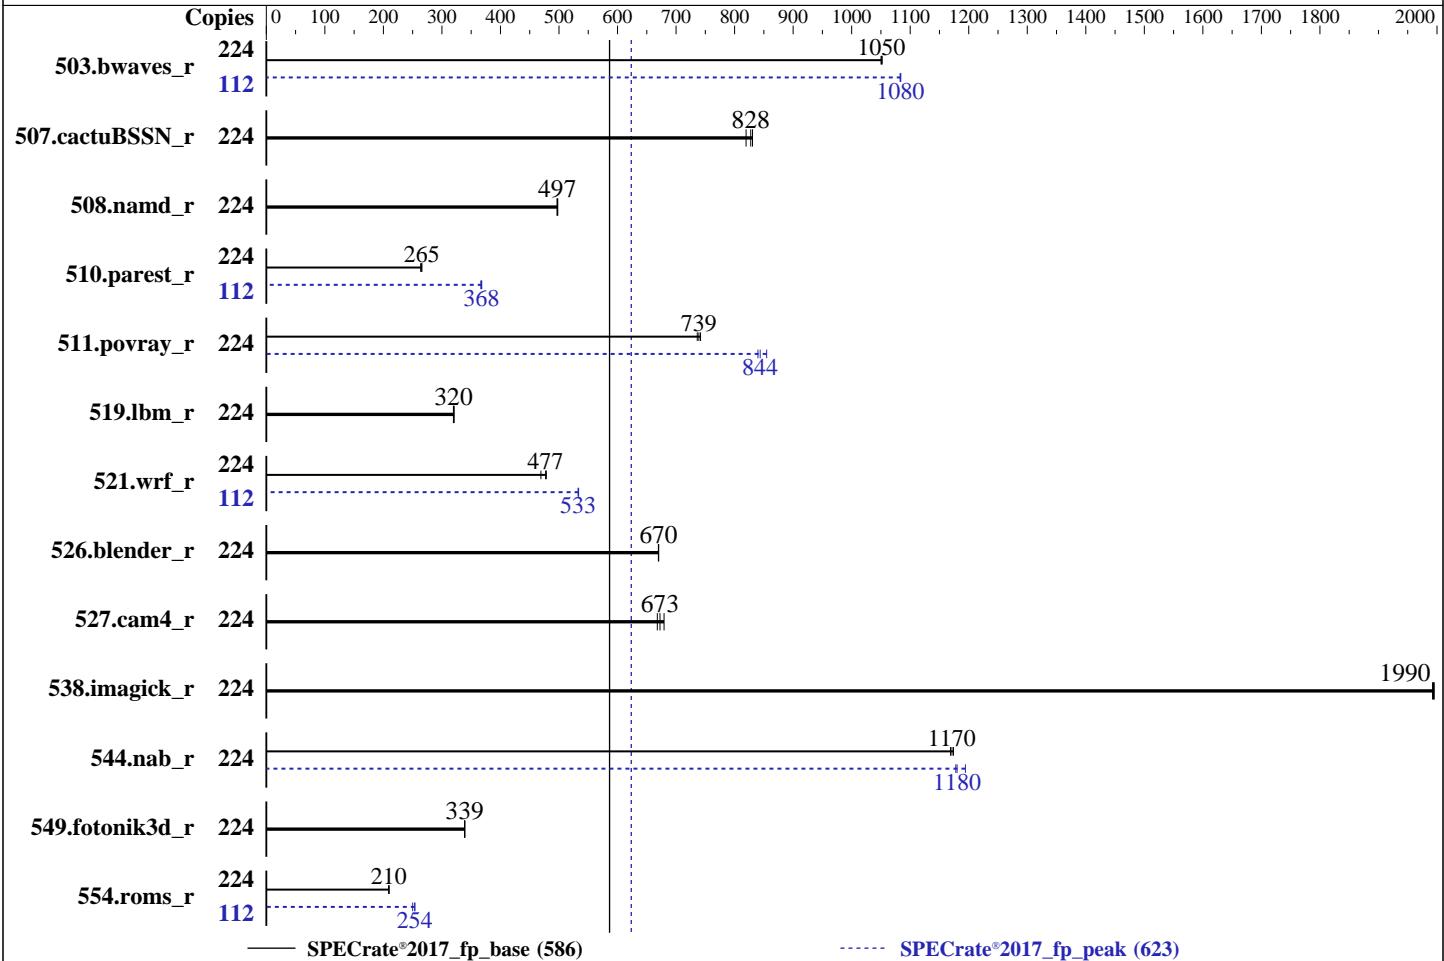

— SPECrate®2017\_fp\_base (586)

----- SPECrate®2017\_fp\_peak (623)

### Hardware

CPU Name: Intel Xeon Platinum 8276L  
 Max MHz: 4000  
 Nominal: 2200  
 Enabled: 112 cores, 4 chips, 2 threads/core  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933V-R)  
 Storage: 1 x 600 GB SATA SSD  
 Other: None

### OS:

Red Hat Enterprise Linux release 8.3 (Ootpa)  
 4.18.0-240.el8.x86\_64

### Compiler:

C/C++: Version 2021.1 of Intel oneAPI DPC++/C++  
 Compiler Build 20201113 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++  
 Compiler Classic Build 20201112 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran  
 Compiler Classic Build 20201112 for Linux

### Parallel:

No

### Firmware:

Version 4.1.16 released Aug-2021

### File System:

xfs

### System State:

Run level 3 (multi-user)

### Base Pointers:

64-bit

### Peak Pointers:

64-bit

### Other:

jemalloc memory allocator V5.0.1

### Power Management:

BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

**SPECrate®2017\_fp\_base = 586**

**SPECrate®2017\_fp\_peak = 623**

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	<b>2137</b>	<b>1050</b>	2135	1050	2139	1050	112	1037	1080	1036	1080	<b>1037</b>	<b>1080</b>
507.cactusBSSN_r	224	341	831	<b>343</b>	<b>828</b>	346	820	224	341	831	<b>343</b>	<b>828</b>	346	820
508.namd_r	224	427	498	<b>428</b>	<b>497</b>	428	497	224	427	498	<b>428</b>	<b>497</b>	428	497
510.parest_r	224	<b>2207</b>	<b>265</b>	2223	264	2206	266	112	800	366	796	368	<b>797</b>	<b>368</b>
511.povray_r	224	710	736	<b>708</b>	<b>739</b>	705	742	224	<b>620</b>	<b>844</b>	623	840	612	855
519.lbm_r	224	<b>738</b>	<b>320</b>	736	321	739	320	224	<b>738</b>	<b>320</b>	736	321	739	320
521.wrf_r	224	1049	478	1070	469	<b>1052</b>	<b>477</b>	112	470	534	471	533	<b>471</b>	<b>533</b>
526.blender_r	224	509	670	<b>509</b>	<b>670</b>	509	670	224	509	670	<b>509</b>	<b>670</b>	509	670
527.cam4_r	224	587	668	577	680	<b>583</b>	<b>673</b>	224	587	668	577	680	<b>583</b>	<b>673</b>
538.imagick_r	224	279	2000	<b>279</b>	<b>1990</b>	280	1990	224	279	2000	<b>279</b>	<b>1990</b>	280	1990
544.nab_r	224	321	1170	323	1170	<b>322</b>	<b>1170</b>	224	320	1180	316	1190	<b>319</b>	<b>1180</b>
549.fotonik3d_r	224	2574	339	<b>2575</b>	<b>339</b>	2578	339	224	2574	339	<b>2575</b>	<b>339</b>	2578	339
554.roms_r	224	1702	209	<b>1699</b>	<b>210</b>	1699	210	112	712	250	702	254	<b>702</b>	<b>254</b>

**SPECrate®2017\_fp\_base = 586**

**SPECrate®2017\_fp\_peak = 623**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 623

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## General Notes (Continued)

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

BIOS and OS configuration:

ENERGY\_PERF\_BIAS\_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

Sub NUMA Cluster (SNC) set to enable

Scaling\_Governor set to Performance

```
Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Fri Apr 8 22:18:04 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
        4 "physical id"s (chips)
        224 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
    cpu cores : 28
    siblings   : 56
    physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
    physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
                28 29 30
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 623

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Platform Notes (Continued)

```
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30  
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27  
28 29 30
```

From lscpu from util-linux 2.32.1:

```
Architecture: x86_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 224  
On-line CPU(s) list: 0-223  
Thread(s) per core: 2  
Core(s) per socket: 28  
Socket(s): 4  
NUMA node(s): 8  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz  
Stepping: 7  
CPU MHz: 3000.126  
CPU max MHz: 4000.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 4400.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 39424K  
NUMA node0 CPU(s): 0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135  
NUMA node1 CPU(s): 4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139  
NUMA node2 CPU(s): 28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163  
NUMA node3 CPU(s): 32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167  
NUMA node4 CPU(s): 56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191  
NUMA node5 CPU(s): 60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195  
NUMA node6 CPU(s): 84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219  
NUMA node7 CPU(s): 88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov  
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid  
aperfmpfperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm  
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c  
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single  
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsqsbbase tsc_adjust bmi1 hle avx2  
smep bmi2 erms invpcid cqmq mpq rdt_a avx512f avx512dq rdseed adx smap clflushopt  
clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc  
cqmq_occup_llc cqmq_mbmb_total cqmq_mbmb_local dtherm ida arat pln pts pku ospke
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 623

CPU2017 License: 3358

Test Date: Apr-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: Dec-2020

## Platform Notes (Continued)

```
avx512_vnni md_clear flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128  
129 133 134 135

node 0 size: 184476 MB

node 0 free: 178954 MB

node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131  
132 136 137 138 139

node 1 size: 186373 MB

node 1 free: 182690 MB

node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154  
155 156 157 161 162 163

node 2 size: 186305 MB

node 2 free: 182702 MB

node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158  
159 160 164 165 166 167

node 3 size: 186377 MB

node 3 free: 182644 MB

node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182  
183 184 185 189 190 191

node 4 size: 186387 MB

node 4 free: 182683 MB

node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186  
187 188 192 193 194 195

node 5 size: 185591 MB

node 5 free: 182713 MB

node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205  
210 211 212 213 217 218 219

node 6 size: 186219 MB

node 6 free: 182585 MB

node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208  
209 214 215 216 220 221 222 223

node 7 size: 186724 MB

node 7 free: 182657 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	11	21	21	21	21	21	21

1:	11	10	21	21	21	21	21	21
----	----	----	----	----	----	----	----	----

2:	21	21	10	11	21	21	21	21
----	----	----	----	----	----	----	----	----

3:	21	21	11	10	21	21	21	21
----	----	----	----	----	----	----	----	----

4:	21	21	21	21	10	11	21	21
----	----	----	----	----	----	----	----	----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 623

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Platform Notes (Continued)

```
5: 21 21 21 21 11 10 21 21  
6: 21 21 21 21 21 21 10 11  
7: 21 21 21 21 21 21 11 10
```

From /proc/meminfo

```
MemTotal: 1583889704 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

/sbin/tuned-adm active  
Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has  
performance

From /etc/\*release\* /etc/\*version\*  
os-release:

```
NAME="Red Hat Enterprise Linux"  
VERSION="8.3 (Ootpa)"  
ID="rhel"  
ID_LIKE="fedora"  
VERSION_ID="8.3"  
PLATFORM_ID="platform:el8"  
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"  
ANSI_COLOR="0;31"  
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)  
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

KVM: Mitigation: Split huge pages

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store  
Bypass disabled via prctl and  
seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps  
barriers and \_\_user pointer  
sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB:  
conditional, RSB filling

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 623

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Platform Notes (Continued)

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Mitigation: TSX disabled

run-level 3 Apr 8 11:55

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	484G	128G	356G	27%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Inspur
Product:	NF8260M5
Serial:	221140642

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Micron 18ASF4G72PDZ-2G9E1 32 GB 2 rank 2933

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	4.1.16
BIOS Date:	08/25/2021
BIOS Revision:	5.14

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	519.lbm_r(base, peak) 538.imagick_r(base, peak)
	544.nab_r(base, peak)

=====

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====

C++	508.namd_r(base, peak) 510.parest_r(base, peak)
-----	---

=====

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 623

CPU2017 License: 3358

Test Date: Apr-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

=====

C++, C | 511.povray\_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray\_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 623

CPU2017 License: 3358

Test Date: Apr-2022

Test Sponsor: Inspur Corporation

Hardware Availability: Apr-2019

Tested by: Inspur Corporation

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(peak)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 623

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 623

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Base Portability Flags (Continued)

```
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 623

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-floop-optimize -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-floop-optimize -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

521.wrf\_r: ifort icc

527.cam4\_r: ifort icx

Benchmarks using both C and C++:

511.povray\_r: icpcicc

526.blender\_r: icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 623

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

```
544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -fllto
-Ofast -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

508.namd\_r: basepeak = yes

```
510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-fllto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Inspur Corporation

Inspur NF8260M5 (Intel Xeon Platinum 8276L)

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

SPECrate®2017\_fp\_base = 586

SPECrate®2017\_fp\_peak = 623

Test Date: Apr-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

## Peak Optimization Flags (Continued)

521.wrf\_r (continued):

```
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3  
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-multiple-gather-scatter-by-shuffles  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.5.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.5.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-04-08 22:18:04-0400.

Report generated on 2022-04-29 13:26:40 by CPU2017 PDF formatter v6442.

Originally published on 2022-04-27.