



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R7625 (AMD EPYC 9374F 32-Core Processor)


CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 344

SPECspeed®2017\_fp\_peak = Not Run

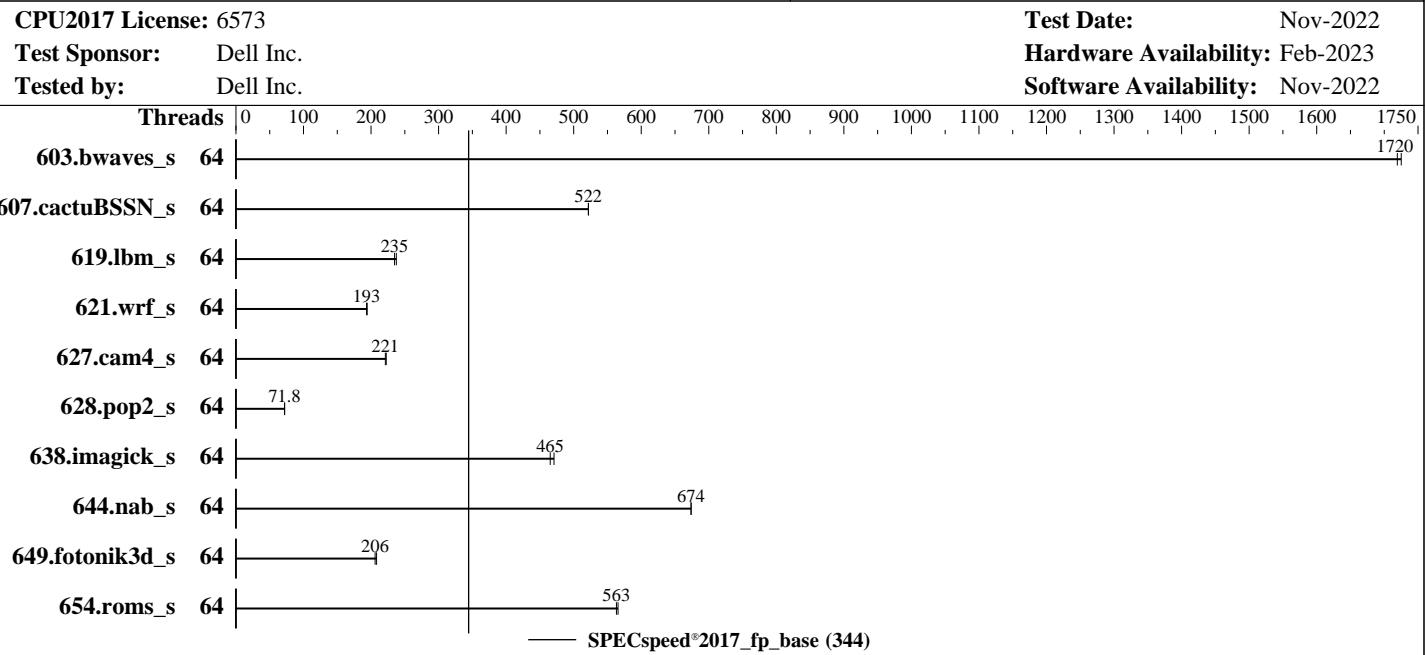

### Hardware

CPU Name: AMD EPYC 9374F  
Max MHz: 4300  
Nominal: 3850  
Enabled: 64 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores  
Other: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 125 GB on tmpfs  
Other: None

### Software

OS: Ubuntu 22.04.1 LTS  
Compiler: 5.15.0-46-generic  
Parallel: C/C++/Fortran: Version 4.0.0 of AOCC  
Firmware: Yes  
File System: Version 1.0.2 released Oct-2022  
System State: tmpfs  
Base Pointers: Run level 3 (multi-user)  
Peak Pointers: 64-bit  
Other: Not Applicable  
Power Management: None  
BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 344

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads
603.bwaves_s	64	<b>34.3</b>	<b>1720</b>	34.2	1730											
607.cactuBSSN_s	64	<b>32.0</b>	<b>522</b>	31.9	522											
619.lbm_s	64	22.1	237	<b>22.3</b>	<b>235</b>											
621.wrf_s	64	68.1	194	<b>68.4</b>	<b>193</b>											
627.cam4_s	64	<b>40.1</b>	<b>221</b>	39.8	222											
628.pop2_s	64	<b>165</b>	<b>71.8</b>	164	72.2											
638.imagick_s	64	30.6	471	<b>31.0</b>	<b>465</b>											
644.nab_s	64	25.9	674	<b>25.9</b>	<b>674</b>											
649.fotonik3d_s	64	43.8	208	<b>44.2</b>	<b>206</b>											
654.roms_s	64	<b>28.0</b>	<b>563</b>	27.8	566											

SPECspeed®2017\_fp\_base = 344

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9374F 32-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 344

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

To always enable THP for peak runs of:

603.bwaves\_s, 607.cactubSSN\_s, 619.lbm\_s, 627.cam4\_s, 628.pop2\_s, 638.imagick\_s, 644.nab\_s, 649.fotonik3d\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

To disable THP for peak runs of 621.wrf\_s:

'echo never > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

To enable THP only on request for peak runs of 654.roms\_s:

'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9374F 32-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 344

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Platform Notes

BIOS settings:

```
    DRAM Refresh Delay : Performance
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
        Logical Processor : Disabled
    Virtualization Technology : Disabled
        L3 Cache as NUMA Domain : Enabled

    System Profile : Custom
        C-States : Disabled
    Memory Patrol Scrub : Disabled
    PCI ASPM L1 Link
        Power Management : Disabled
        Determinism Slider : Power Determinism
    Algorithm Performance
        Boost Disable (ApbDis) : Enabled
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on amd-sut Thu Nov 3 15:25:01 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 9374F 32-Core Processor
  2 "physical id"s (chips)
  64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31
```

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Vendor ID: AuthenticAMD
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9374F 32-Core Processor)

**SPECspeed®2017\_fp\_base = 344**

**SPECspeed®2017\_fp\_peak = Not Run**

**CPU2017 License:** 6573

**Test Date:** Nov-2022

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Feb-2023

**Tested by:** Dell Inc.

**Software Availability:** Nov-2022

## Platform Notes (Continued)

Model name:	AMD EPYC 9374F 32-Core Processor
CPU family:	25
Model:	17
Thread(s) per core:	1
Core(s) per socket:	32
Socket(s):	2
Stepping:	1
Frequency boost:	enabled
CPU max MHz:	4306.0000
CPU min MHz:	400.0000
BogoMIPS:	7702.22
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osrw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwmtx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_ll1d
Virtualization:	AMD-V
L1d cache:	2 MiB (64 instances)
L1i cache:	2 MiB (64 instances)
L2 cache:	64 MiB (64 instances)
L3 cache:	512 MiB (16 instances)
NUMA node(s):	16
NUMA node0 CPU(s):	0-3
NUMA node1 CPU(s):	16-19
NUMA node2 CPU(s):	8-11
NUMA node3 CPU(s):	24-27
NUMA node4 CPU(s):	12-15
NUMA node5 CPU(s):	28-31
NUMA node6 CPU(s):	4-7
NUMA node7 CPU(s):	20-23
NUMA node8 CPU(s):	32-35
NUMA node9 CPU(s):	48-51
NUMA node10 CPU(s):	40-43
NUMA node11 CPU(s):	56-59
NUMA node12 CPU(s):	44-47
NUMA node13 CPU(s):	60-63
NUMA node14 CPU(s):	36-39

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9374F 32-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

**SPECspeed®2017\_fp\_base = 344**

**SPECspeed®2017\_fp\_peak = Not Run**

**Test Date:** Nov-2022

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Platform Notes (Continued)

NUMA node15 CPU(s):	52-55
Vulnerability Itlb multihit:	Not affected
Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus:	0 1 2 3
node 0 size:	96312 MB
node 0 free:	95481 MB
node 1 cpus:	16 17 18 19
node 1 size:	96766 MB
node 1 free:	96297 MB
node 2 cpus:	8 9 10 11
node 2 size:	96731 MB
node 2 free:	95602 MB
node 3 cpus:	24 25 26 27
node 3 size:	96766 MB
node 3 free:	92926 MB
node 4 cpus:	12 13 14 15
node 4 size:	96766 MB
node 4 free:	96488 MB
node 5 cpus:	28 29 30 31
node 5 size:	96746 MB
node 5 free:	96498 MB

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 344

SPECspeed®2017\_fp\_peak = Not Run

PowerEdge R7625 (AMD EPYC 9374F 32-Core Processor)

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

```
node 6 cpus: 4 5 6 7
node 6 size: 96766 MB
node 6 free: 96516 MB
node 7 cpus: 20 21 22 23
node 7 size: 96766 MB
node 7 free: 96506 MB
node 8 cpus: 32 33 34 35
node 8 size: 96766 MB
node 8 free: 96638 MB
node 9 cpus: 48 49 50 51
node 9 size: 96766 MB
node 9 free: 96638 MB
node 10 cpus: 40 41 42 43
node 10 size: 96766 MB
node 10 free: 96641 MB
node 11 cpus: 56 57 58 59
node 11 size: 96766 MB
node 11 free: 96631 MB
node 12 cpus: 44 45 46 47
node 12 size: 96766 MB
node 12 free: 96646 MB
node 13 cpus: 60 61 62 63
node 13 size: 96739 MB
node 13 free: 96619 MB
node 14 cpus: 36 37 38 39
node 14 size: 96766 MB
node 14 free: 96666 MB
node 15 cpus: 52 53 54 55
node 15 size: 96766 MB
node 15 free: 96638 MB
node distances:
node  0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15
  0: 10  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32
  1: 11  10  11  11  11  11  11  11  32  32  32  32  32  32  32  32
  2: 11  11  10  11  11  11  11  11  32  32  32  32  32  32  32  32
  3: 11  11  11  10  11  11  11  11  32  32  32  32  32  32  32  32
  4: 11  11  11  11  10  11  11  11  32  32  32  32  32  32  32  32
  5: 11  11  11  11  11  10  11  11  32  32  32  32  32  32  32  32
  6: 11  11  11  11  11  11  10  11  32  32  32  32  32  32  32  32
  7: 11  11  11  11  11  11  11  10  32  32  32  32  32  32  32  32
  8: 32  32  32  32  32  32  32  32  10  11  11  11  11  11  11  11
  9: 32  32  32  32  32  32  32  32  11  10  11  11  11  11  11  11
 10: 32  32  32  32  32  32  32  32  11  11  10  11  11  11  11  11
 11: 32  32  32  32  32  32  32  32  11  11  11  10  11  11  11  11
 12: 32  32  32  32  32  32  32  32  11  11  11  11  10  11  11  11
 13: 32  32  32  32  32  32  32  32  11  11  11  11  11  10  11  11
 14: 32  32  32  32  32  32  32  32  11  11  11  11  11  11  10  11
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9374F 32-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 344

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

15: 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 10

From /proc/meminfo

MemTotal: 1584878456 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: latency-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

/usr/bin/lsb\_release -d

Ubuntu 22.04.1 LTS

From /etc/\*release\* /etc/\*version\*

debian\_version: bookworm/sid

os-release:

PRETTY\_NAME="Ubuntu 22.04.1 LTS"

NAME="Ubuntu"

VERSION\_ID="22.04"

VERSION="22.04.1 LTS (Jammy Jellyfish)"

VERSION\_CODENAME=jammy

ID=ubuntu

ID\_LIKE=debian

HOME\_URL="https://www.ubuntu.com/"

uname -a:

Linux amd-sut 5.15.0-46-generic #49-Ubuntu SMP Thu Aug 4 18:03:25 UTC 2022 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

Not affected

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

mmio\_stale\_data:

Not affected

retbleed:

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Retpolines, IBPB:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9374F 32-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 344

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

conditional, IBRS\_FW, STIBP:  
disabled, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Nov 3 14:23

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 125G 3.4G 122G 3% /mnt/ramdisk

From /sys/devices/virtual/dmi/id  
Vendor: Dell Inc.  
Product: PowerEdge R7625  
Product Family: PowerEdge  
Serial: 1234567

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x 80AD000080AD HMCG94MEBRA109N 64 GB 2 rank 4800

BIOS:

BIOS Vendor: Dell Inc.  
BIOS Version: 1.0.2  
BIOS Date: 10/17/2022  
BIOS Revision: 1.0

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C           | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
 LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
C++, C, Fortran | 607.cactuBSSN_s(base)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 344

SPECspeed®2017\_fp\_peak = Not Run

PowerEdge R7625 (AMD EPYC 9374F 32-Core Processor)

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9374F 32-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 344

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -futo -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -futo -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9374F 32-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 344

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIB -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdallic  
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIB -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdallic  
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9374F 32-Core Processor)

SPECspeed®2017\_fp\_base = 344

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Nov-2022

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-11-03 11:25:01-0400.

Report generated on 2023-02-01 18:19:44 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.