



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 641

SPECrate®2017_fp_peak = 665

CPU2017 License: 3358


Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

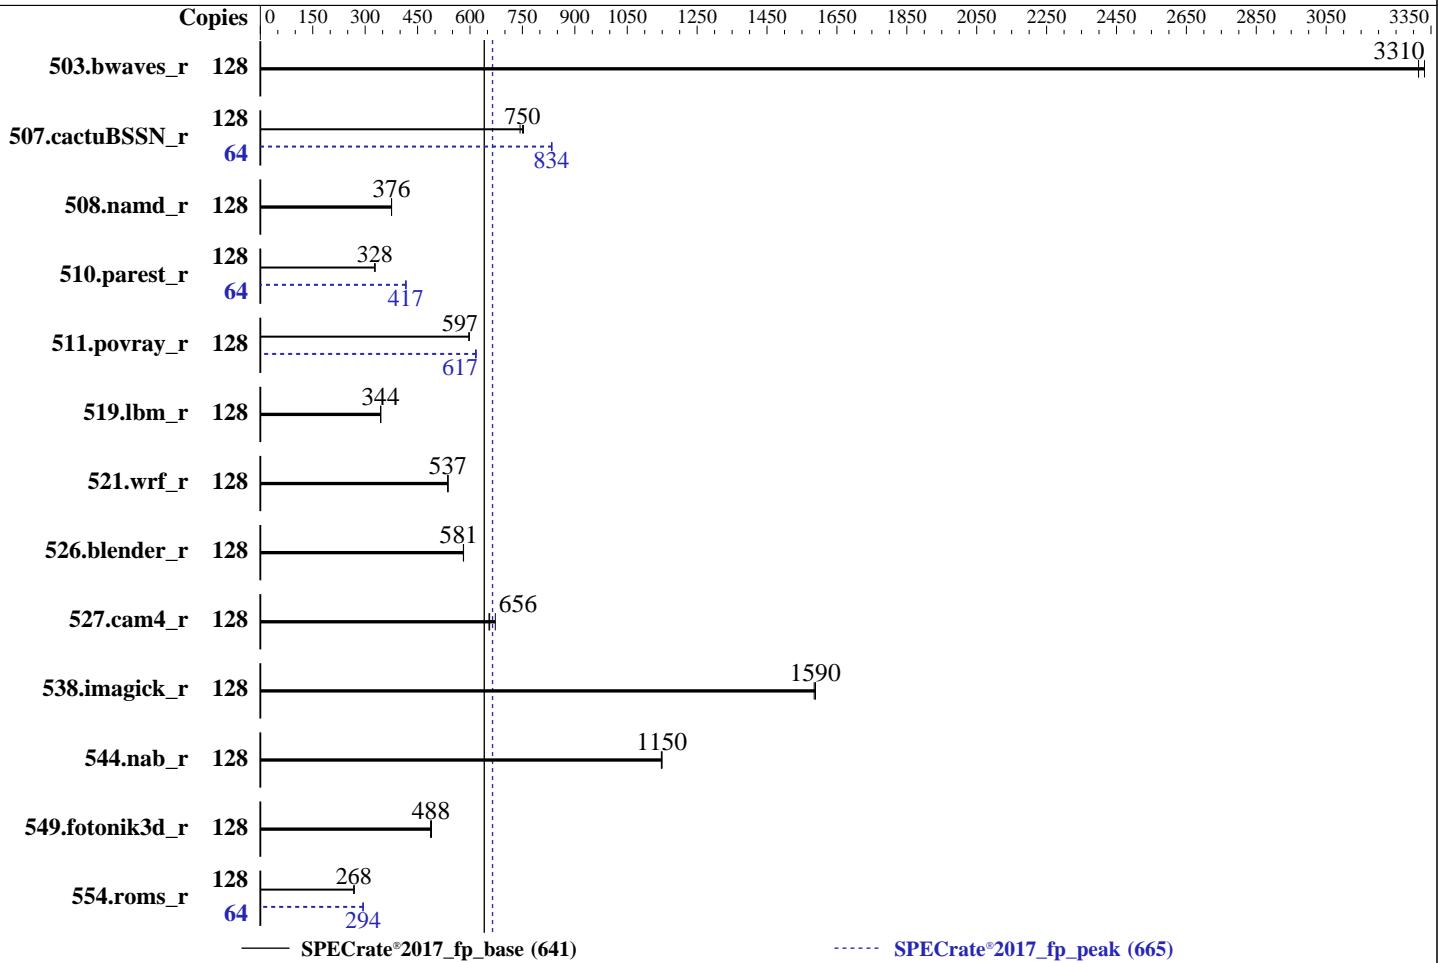

Hardware		Software	
CPU Name:	Intel Xeon Gold 6430	OS:	Red Hat Enterprise Linux 9.0 (Plow)
Max MHz:	3400	Compiler:	5.14.0-70.22.1.el9_0.x86_64
Nominal:	2100		C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Enabled:	64 cores, 2 chips, 2 threads/core		Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Orderable:	1,2 chips	Parallel:	No
Cache L1:	32 KB I + 48 KB D on chip per core	Firmware:	Version 03.01.00 released Dec-2022
L2:	2 MB I+D on chip per core	File System:	xfs
L3:	60 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	512 GB (16 x 32 GB 2Rx4 PC5-4800B-R, running at 4400)	Peak Pointers:	64-bit
Storage:	1 x 1 TB NVME SSD	Other:	jemalloc memory allocator V5.0.1
Other:	None	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 641
SPECrate®2017_fp_peak = 665

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	385	3330	387	3310	387	3310	128	385	3330	387	3310	387	3310
507.cactusBSSN_r	128	215	753	216	750	218	743	64	97.2	834	97.1	835	97.2	833
508.namd_r	128	324	376	324	375	324	376	128	324	376	324	375	324	376
510.parest_r	128	1023	327	1020	328	1022	328	64	402	416	402	417	402	417
511.povray_r	128	500	598	500	597	500	597	128	484	618	484	617	485	616
519.lbm_r	128	392	344	392	345	392	344	128	392	344	392	345	392	344
521.wrf_r	128	534	537	534	536	534	537	128	534	537	534	536	534	537
526.blender_r	128	335	582	335	581	335	581	128	335	582	335	581	335	581
527.cam4_r	128	333	672	341	656	342	654	128	333	672	341	656	342	654
538.imagick_r	128	200	1590	201	1580	200	1590	128	200	1590	201	1580	200	1590
544.nab_r	128	188	1150	187	1150	187	1150	128	188	1150	187	1150	187	1150
549.fotonik3d_r	128	1021	488	1023	487	1018	490	128	1021	488	1023	487	1018	490
554.roms_r	128	757	269	760	268	760	268	64	346	294	346	294	346	294

SPECrate®2017_fp_base = 641

SPECrate®2017_fp_peak = 665

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECCrate®2017_fp_base = 641
SPECCrate®2017_fp_peak = 665

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

ENERGY_PERF_BIAS_CFG mode set to Performance

Hardware Prefetch set to Disable

VT Support set to Disable

Sub NUMA Cluster (SNC) set to SNC4

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Jul 31 19:52:10 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64 x86_64 x86_64
GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 641
SPECrate®2017_fp_peak = 665

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

2. w
19:52:10 up 6:39, 1 user, load average: 81.65, 116.23, 122.76
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 13:12 6:38m 0.96s 0.01s sh
reportable-ic2023.0-lin-sapphirerapids-rate-smt-on-20221201.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062190
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062190
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
login -- root
-bash
sh reportable-ic2023.0-lin-sapphirerapids-rate-smt-on-20221201.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size reffrate fprate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/CPU2017

6. /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6430
vendor_id : GenuineIntel
cpu family : 6
model : 143
stepping : 6
microcode : 0x2b000130
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores : 32
siblings : 64
2 physical ids (chips)
128 processors (hardware threads)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 641

NF5280M7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 665

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Gold 6430
BIOS Model name: Intel(R) Xeon(R) Gold 6430
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
Stepping: 6
CPU max MHz: 3400.0000
CPU min MHz: 800.0000
BogoMIPS: 3800.00
Flags: fpu vme de pse tsc msr pae cx8 apic sep mtrr pge mca cmov pat pse36
      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperf tpmperf tsc_known_freq pnpi pclmulqdq dtes64 monitor
      ds_cpl smx est tm2 ssse3 sdbg fma cx16 xptr pdcm pcid dca sse4_1 sse4_2
      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
      abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
      intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
      tsc_adjust bmil avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq
      rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occu_llc
      cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16
      wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
      avx512vbmi umip pkum ipkum waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
      avx512_vnni avx512_bitlg tme avx512_vpocntdq la57 rdpid bus_lock_detect
      cldemote movdiri movdir64b engcmd fsrm md_clear serialize tsxldtrk pconfig
      arch_lbr avx512_fp16 amx_tile flush_lll arch_capabilities
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 120 MiB (2 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-7,64-71
NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 641

NF5280M7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 665

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

Vulnerability Itlb multihit:	Not affected
Vulnerability Llft:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation: Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation: Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-7,64-71

node 0 size: 64075 MB

node 0 free: 54356 MB

node 1 cpus: 8-15,72-79

node 1 size: 64508 MB

node 1 free: 57506 MB

node 2 cpus: 16-23,80-87

node 2 size: 64508 MB

node 2 free: 57511 MB

node 3 cpus: 24-31,88-95

node 3 size: 64472 MB

node 3 free: 57466 MB

node 4 cpus: 32-39,96-103

node 4 size: 64508 MB

node 4 free: 57458 MB

node 5 cpus: 40-47,104-111

node 5 size: 64508 MB

node 5 free: 57478 MB

node 6 cpus: 48-55,112-119

node 6 size: 64508 MB

node 6 free: 57449 MB

node 7 cpus: 56-63,120-127

node 7 size: 64497 MB

node 7 free: 57453 MB

node distances:

node	0	1	2	3	4	5	6	7
0:	10	12	12	12	21	21	21	21
1:	12	10	12	12	21	21	21	21
2:	12	12	10	12	21	21	21	21
3:	12	12	12	10	21	21	21	21
4:	21	21	21	21	10	12	12	12
5:	21	21	21	21	12	10	12	12
6:	21	21	21	21	12	12	10	12
7:	21	21	21	21	12	12	12	10

9. /proc/meminfo

MemTotal: 527961736 kB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 641

SPECrate®2017_fp_peak = 665

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

10. who -r
run-level 3 Jul 31 13:12

11. Systemd service manager version: systemd 250 (250-6.e19_0)
Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* dnf-makecache.service loaded failed dnf makecache

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled dbus-broker getty@ tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited
blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower crond
debug-shell firewalld irqbalance kdump kvm_stat lvm2-monitor man-db-restart-cache-update
mdmonitor microcode nftables nis-domainname rdisc rhsm rhsm-facts rhsmcertd rpmbuild-rebuild
rsyslog selinux-autorelabel-mark sep5 serial-getty@ sshd sshd-keygen@ sssd
systemd-boot-check-no-failures systemd-network-generator systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.e19_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

15. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.40 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

16. tuned-adm active
Current active profile: throughput-performance

17. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 641
SPECrate®2017_fp_peak = 665

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

```
vm.dirty_ratio          40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages         0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness           10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode    0

-----
18. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag      1
    max_ptes_none        511
    max_ptes_shared       256
    max_ptes_swap         64
    pages_to_scan        4096
    scan_sleep_millisecs 10000

-----
20. OS release
    From /etc/*-release /etc/*-version
    os-release      Red Hat Enterprise Linux 9.0 (Plow)
    redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
    system-release  Red Hat Enterprise Linux release 9.0 (Plow)

-----
21. Disk information
    SPEC is set to: /home/CPU2017
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   819G  196G  623G  24%  /home

-----
22. /sys/devices/virtual/dmi/id
    Vendor:        IEI
    Product:       NF5280M7
    Product Family: Not specified
    Serial:        0000000000

-----
23. dmidecode
    Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 641
SPECrate®2017_fp_peak = 665

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Platform Notes (Continued)

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 03.01.00
BIOS Date: 12/29/2022

Compiler Version Notes

=====

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 641

NF5280M7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 665

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 641

NF5280M7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 665

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECCrate®2017_fp_base = 641
SPECCrate®2017_fp_peak = 665

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.

SPECrate®2017_fp_base = 641

NF5280M7 (Intel Xeon Gold 6430)

SPECrate®2017_fp_peak = 665

CPU2017 License: 3358

Test Date: Jul-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Hardware Availability: Apr-2023

Tested by: Inspur Electronic Information Industry Co., Ltd.

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-31 19:52:10-0400.

Report generated on 2023-08-30 09:41:04 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-29.