



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 179

## NF5180M7 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 179

CPU2017 License: 3358


Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

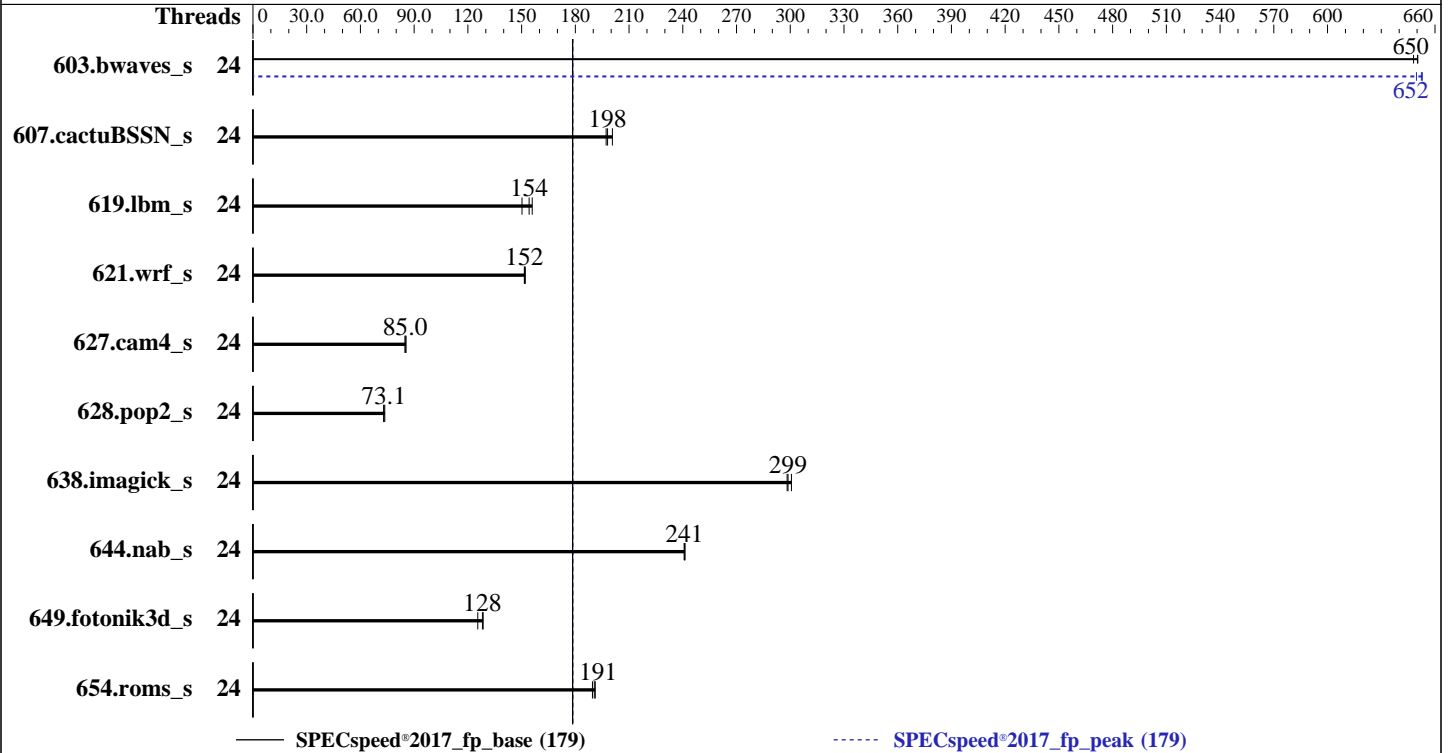

### Hardware

CPU Name: Intel Xeon Silver 4410Y  
 Max MHz: 3900  
 Nominal: 2000  
 Enabled: 24 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 30 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC5-4800B-R, running at 4000)  
 Storage: 1 x 1 TB NVME SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 5.14.0-70.22.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Version 03.01.00 released Dec-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECSpeed®2017\_fp\_base = 179

NF5180M7 (Intel Xeon Silver 4410Y)

SPECSpeed®2017\_fp\_peak = 179

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	90.7	650	<b><u>90.7</u></b>	<b><u>650</u></b>	91.0	648	24	90.8	650	<b><u>90.4</u></b>	<b><u>652</u></b>	90.4	653
607.cactuBSSN_s	24	84.5	197	<b><u>84.2</u></b>	<b><u>198</u></b>	83.1	201	24	84.5	197	<b><u>84.2</u></b>	<b><u>198</u></b>	83.1	201
619.lbm_s	24	<b><u>34.0</u></b>	<b><u>154</u></b>	33.6	156	34.9	150	24	<b><u>34.0</u></b>	<b><u>154</u></b>	33.6	156	34.9	150
621.wrf_s	24	87.0	152	87.3	152	<b><u>87.3</u></b>	<b><u>152</u></b>	24	87.0	152	87.3	152	<b><u>87.3</u></b>	<b><u>152</u></b>
627.cam4_s	24	104	84.9	<b><u>104</u></b>	<b><u>85.0</u></b>	104	85.5	24	104	84.9	<b><u>104</u></b>	<b><u>85.0</u></b>	104	85.5
628.pop2_s	24	<b><u>163</u></b>	<b><u>73.1</u></b>	161	73.6	163	73.0	24	<b><u>163</u></b>	<b><u>73.1</u></b>	161	73.6	163	73.0
638.imagick_s	24	48.4	298	<b><u>48.3</u></b>	<b><u>299</u></b>	48.0	301	24	48.4	298	<b><u>48.3</u></b>	<b><u>299</u></b>	48.0	301
644.nab_s	24	72.4	241	<b><u>72.5</u></b>	<b><u>241</u></b>	72.6	241	24	72.4	241	<b><u>72.5</u></b>	<b><u>241</u></b>	72.6	241
649.fotonik3d_s	24	72.6	126	70.9	129	<b><u>71.1</u></b>	<b><u>128</u></b>	24	72.6	126	70.9	129	<b><u>71.1</u></b>	<b><u>128</u></b>
654.roms_s	24	82.4	191	<b><u>82.6</u></b>	<b><u>191</u></b>	83.1	190	24	82.4	191	<b><u>82.6</u></b>	<b><u>191</u></b>	83.1	190

SPECSpeed®2017\_fp\_base = 179

SPECSpeed®2017\_fp\_peak = 179

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
 KMP\_AFFINITY = "granularity=fine,compact"  
 LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"  
 MALLOC\_CONF = "retain:true"  
 OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
 memory using Redhat Enterprise Linux 8.0  
 Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
 sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 179

NF5180M7 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 179

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes

BIOS configuration:  
ENERGY\_PERF\_BIAS\_CFG mode set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable  
Hyper Threading set to disable

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Sat Oct 14 13:36:50 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

```
1. uname -a
Linux localhost 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64 x86_64 x86_64
GNU/Linux
```

```
2. w
13:36:50 up 1 day, 1:28, 3 users, load average: 0.00, 0.00, 0.00
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 Fri12 2:30 0.02s 0.02s -bash
root tty2 13:34 6.00s 0.80s 0.00s sh
reportable-ic2023.0-lin-sapphirerapids-speed-smt-off-20221201.sh
root tty3 13:36 13.00s 0.15s 0.15s -bash
```

```
3. Username
From environment variable $USER: root
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 179

## NF5180M7 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 179

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Oct-2023

**Hardware Availability:** Apr-2023

**Software Availability:** Dec-2022

### Platform Notes (Continued)

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062287
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062287
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 27
login -- root
-bash
sh reportable-ic2023.0-lin-sapphirerapids-speed-smt-off-20221201.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=24 --tune base,peak -o all --define
drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=24 --tune base,peak --output_format all
--define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.007/templogs/preenv.fpspeed.007.0.log --lognum 007.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Silver 4410Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 7
microcode      : 0x2b000130
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 12
siblings       : 12
2 physical ids (chips)
24 processors (hardware threads)
physical id 0: core ids 0-11
physical id 1: core ids 0-11
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22
physical id 1: apicids 128,130,132,134,136,138,140,142,144,146,148,150
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu

From lscpu from util-linux 2.37.4:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 179

## NF5180M7 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 179

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

### Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       24
On-line CPU(s) list:         0-23
Vendor ID:                    GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                   Intel(R) Xeon(R) Silver 4410Y
BIOS Model name:             Intel(R) Xeon(R) Silver 4410Y
CPU family:                   6
Model:                        143
Thread(s) per core:          1
Core(s) per socket:          12
Socket(s):                    2
Stepping:                     7
CPU max MHz:                  3900.0000
CPU min MHz:                  800.0000
BogoMIPS:                     4000.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2
                                smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                                ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                amx_tile flush_lld arch_capabilities

Virtualization:               VT-x
L1d cache:                    1.1 MiB (24 instances)
L1i cache:                    768 KiB (24 instances)
L2 cache:                     48 MiB (24 instances)
L3 cache:                     60 MiB (2 instances)
NUMA node(s):                 2
NUMA node0 CPU(s):            0-11
NUMA node1 CPU(s):            12-23
Vulnerability Itlb multihit:  Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:      Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:      Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:           Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 179

NF5180M7 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 179

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

L3 30M 60M 15 Unified 3 32768 1 64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-11

node 0 size: 257613 MB

node 0 free: 254791 MB

node 1 cpus: 12-23

node 1 size: 257997 MB

node 1 free: 257489 MB

node distances:

node 0 1

0: 10 21

1: 21 10

9. /proc/meminfo

MemTotal: 527986460 kB

10. who -r

run-level 3 Oct 13 12:08

11. Systemd service manager version: systemd 250 (250-6.el9\_0)

Default Target Status

multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT LOAD ACTIVE SUB DESCRIPTION

\* dnf-makecache.service loaded failed failed dnf makecache

13. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled dbus-broker getty@ tuned udisks2 upower

enabled-runtime systemd-remount-fs

disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd

blk-availability canberra-system-bootup canberra-system-shutdown

canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower crond

debug-shell firewalld irqbalance kdump kvm\_stat lvm2-monitor man-db-restart-cache-update

mdmonitor microcode nftables nis-domainname rdisc rhsm rhsm-facts rhsmcertd rpmdb-rebuild

rsyslog selinux-autorelabel-mark sep5 serial-getty@ sshd sshd-keygen@ sssd

systemd-boot-check-no-failures systemd-network-generator systemd-pstore systemd-sysext

indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9\_0.x86\_64

root=/dev/mapper/rhel-root

ro

resume=/dev/mapper/rhel-swap

rd.lvm.lv=rhel/root

rd.lvm.lv=rhel/swap

15. cpupower frequency-info

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 179

NF5180M7 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 179

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

analyzing CPU 0:

current policy: frequency should be within 800 MHz and 3.90 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

-----  
16. tuned-adm active

Current active profile: throughput-performance

-----  
17. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

-----  
18. /sys/kernel/mm/transparent\_hugepage

defrag	always defer defer+madvice [madvice] never
enabled	[always] madvice never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

-----  
19. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

-----  
20. OS release

From /etc/*-release /etc/*-version	
os-release	Red Hat Enterprise Linux 9.0 (Plow)
redhat-release	Red Hat Enterprise Linux release 9.0 (Plow)
system-release	Red Hat Enterprise Linux release 9.0 (Plow)

-----  
21. Disk information

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 179

NF5180M7 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 179

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Platform Notes (Continued)

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	819G	213G	607G	26%	/home

22. /sys/devices/virtual/dmi/id

```
Vendor:      IEI
Product:     NF5180M7
Product Family: Not specified
Serial:      000000000
```

23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory: 16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     03.01.00
BIOS Date:        12/29/2022
```

## Compiler Version Notes

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201 Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201 Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201 Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201 Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201 Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 179

NF5180M7 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 179

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 179

NF5180M7 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 179

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 179

NF5180M7 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 179

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.4.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECspeed®2017\_fp\_base = 179

NF5180M7 (Intel Xeon Silver 4410Y)

SPECspeed®2017\_fp\_peak = 179

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Oct-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-14 13:36:50-0400.  
Report generated on 2023-11-21 20:30:58 by CPU2017 PDF formatter v6716.  
Originally published on 2023-11-21.