



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2450 M2,  
AMD EPYC 9274F, 4.05 GHz

**SPECrate®2017\_fp\_base = 794**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 19


**Test Date:** Mar-2024

Test Sponsor: Fujitsu

**Hardware Availability:** Feb-2024

Tested by: Fujitsu

**Software Availability:** Nov-2022

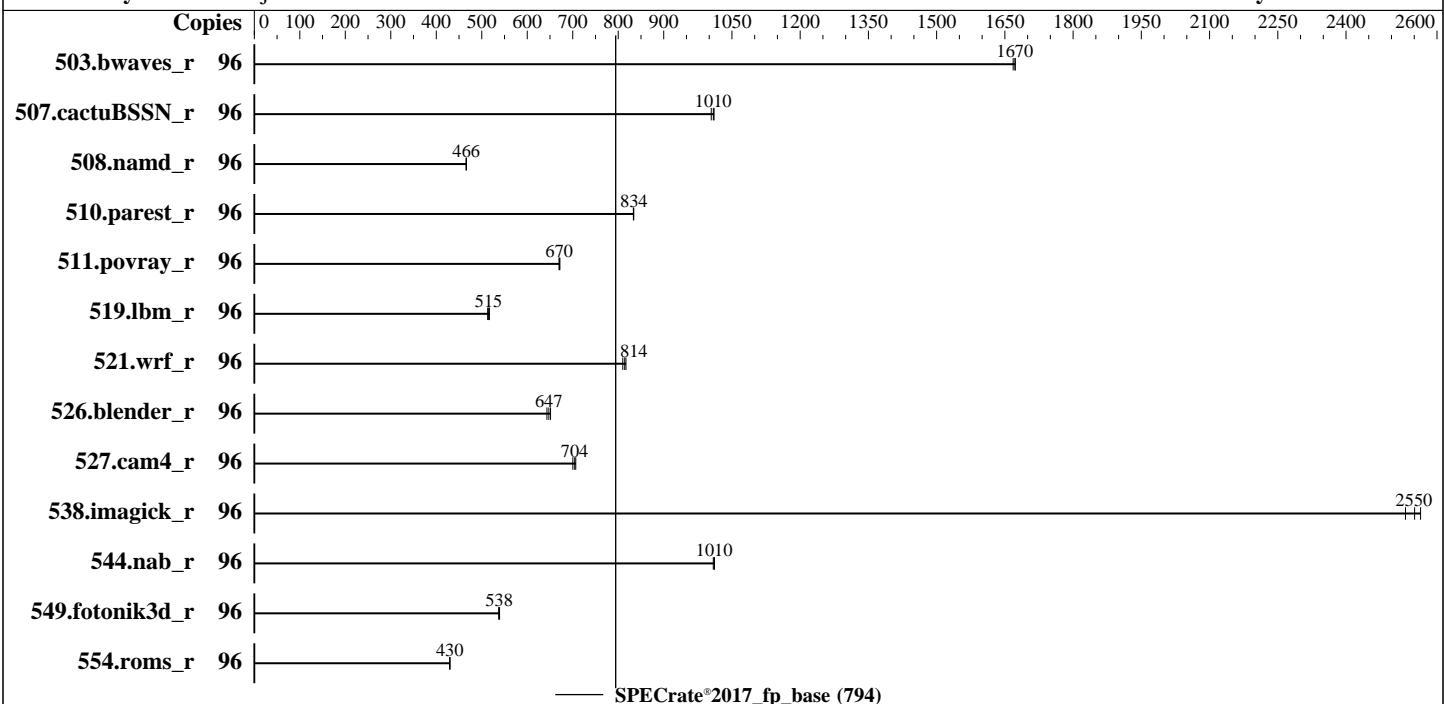

## Hardware

CPU Name: AMD EPYC 9274F  
 Max MHz: 4300  
 Nominal: 4050  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 3 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x PCIE NVME SSD, 6.4 TB  
 Other: Cooling: Air

## Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Fujitsu BIOS Version Version V5.0.0.27 R1.5.0 for D4129-A1x. Released May-2024  
 tested as V5.0.0.27 R1.4.0 for D4129-A1x Jan-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,  
AMD EPYC 9274F, 4.05 GHz

SPECrate®2017\_fp\_base = 794

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	<b>576</b>	<b>1670</b>	575	1670	577	1670									
507.cactubSSN_r	96	121	1000	<b>120</b>	<b>1010</b>	120	1010									
508.namd_r	96	196	466	<b>196</b>	<b>466</b>	196	466									
510.parest_r	96	<b>301</b>	<b>834</b>	301	834	301	833									
511.povray_r	96	335	670	<b>334</b>	<b>670</b>	334	672									
519.lbm_r	96	196	517	197	513	<b>196</b>	<b>515</b>									
521.wrf_r	96	265	810	<b>264</b>	<b>814</b>	263	817									
526.blender_r	96	227	643	225	651	<b>226</b>	<b>647</b>									
527.cam4_r	96	<b>238</b>	<b>704</b>	240	700	238	707									
538.imagick_r	96	93.1	2560	<b>93.6</b>	<b>2550</b>	94.3	2530									
544.nab_r	96	160	1010	160	1010	<b>160</b>	<b>1010</b>									
549.fotonik3d_r	96	696	537	<b>695</b>	<b>538</b>	694	539									
554.roms_r	96	355	429	<b>355</b>	<b>430</b>	355	430									

SPECrate®2017\_fp\_base = 794

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,  
AMD EPYC 9274F, 4.05 GHz

SPECrate®2017\_fp\_base = 794

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2024

Test Sponsor: Fujitsu

Hardware Availability: Feb-2024

Tested by: Fujitsu

Software Availability: Nov-2022

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/Benchmark/speccpu2017r/amd_rate_aocc400_znver4_A_lib/lib:/home/Benchmark/speccpu2017r/amd_rate_  
    aocc400_znver4_A_lib/lib32:  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Determinism Slider = Power

TDP Control = Manual

TDP Limit = 400

Package Power Limit Control = Manual

Package Power Limit = 400

Power Profile Selection = High Performance

NUMA nodes per socket = NPS4

Periodic Directory Rinse (PDR) Tuning = Cache-Bound

Fan Control = Full

```
Sysinfo program /home/Benchmark/speccpu2017r/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Fri Mar  8 22:37:58 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,  
AMD EPYC 9274F, 4.05 GHz

SPECrate®2017\_fp\_base = 794

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

## Platform Notes (Continued)

```
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64  
x86_64 x86_64 GNU/Linux
```

```
-----  
2. w  
22:37:58 up 6:31, 1 user, load average: 21.32, 69.97, 85.56  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root ttys1 16:13 6:23m 1.13s 0.18s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

```
-----  
3. Username  
From environment variable $USER: root
```

```
-----  
4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 3091894  
max locked memory (kbytes, -l) 2097152  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 3091894  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/rhgb --switched-root --system --deserialize 31  
login -- root  
-bash  
-bash  
python3 ./run_amd_fprate_aocc400_znver4_A1.py  
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2450 M2,  
AMD EPYC 9274F, 4.05 GHz

**SPECrate®2017\_fp\_base = 794**

**SPECrate®2017\_fp\_peak = Not Run**

**CPU2017 License:** 19

**Test Date:** Mar-2024

**Test Sponsor:** Fujitsu

**Hardware Availability:** Feb-2024

**Tested by:** Fujitsu

**Software Availability:** Nov-2022

## Platform Notes (Continued)

```
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu2017r
```

---

```
6. /proc/cpuinfo
model name      : AMD EPYC 9274F 24-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 17
stepping        : 1
microcode       : 0xa101144
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores       : 24
siblings        : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-2,8-10,16-18,24-26,32-34,40-42,48-50,56-58
physical id 1: core ids 0-2,8-10,16-18,24-26,32-34,40-42,48-50,56-58
physical id 0: apicids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
physical id 1: apicids 128-133,144-149,160-165,176-181,192-197,208-213,224-229,240-245
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

---

```
7. lscpu
```

From lscpu from util-linux 2.37.4:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9274F 24-Core Processor
BIOS Model name:      AMD EPYC 9274F 24-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):            2
Stepping:              1
Frequency boost:      enabled
CPU max MHz:          4303.1250
CPU min MHz:          1500.0000
BogoMIPS:              8087.29
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpf rapl
                      pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                      popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                      abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                      perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13
                      invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmil
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,  
AMD EPYC 9274F, 4.05 GHz

SPECrate®2017\_fp\_base = 794

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2024

Test Sponsor: Fujitsu

Hardware Availability: Feb-2024

Tested by: Fujitsu

Software Availability: Nov-2022

## Platform Notes (Continued)

```
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrip_save tsc_scale vmbc_clean flushbyasid decodeassist
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pkv ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
AMD-V
```

Virtualization:

L1d cache: 1.5 MiB (48 instances)

L1i cache: 1.5 MiB (48 instances)

L2 cache: 48 MiB (48 instances)

L3 cache: 512 MiB (16 instances)

NUMA node(s): 8

NUMA node0 CPU(s): 0-5,48-53

NUMA node1 CPU(s): 6-11,54-59

NUMA node2 CPU(s): 12-17,60-65

NUMA node3 CPU(s): 18-23,66-71

NUMA node4 CPU(s): 24-29,72-77

NUMA node5 CPU(s): 30-35,78-83

NUMA node6 CPU(s): 36-41,84-89

NUMA node7 CPU(s): 42-47,90-95

Vulnerability Itlb multihit: Not affected

Vulnerability Lltf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation: Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2: Mitigation: Retpolines, IBPB conditional, IBRS\_FW, STIBP always-on, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-5,48-53

node 0 size: 95811 MB

node 0 free: 94924 MB

node 1 cpus: 6-11,54-59

node 1 size: 96765 MB

node 1 free: 96130 MB

node 2 cpus: 12-17,60-65

node 2 size: 96765 MB

node 2 free: 96122 MB

node 3 cpus: 18-23,66-71

node 3 size: 96765 MB

node 3 free: 96110 MB

node 4 cpus: 24-29,72-77

node 4 size: 96728 MB

node 4 free: 96102 MB

node 5 cpus: 30-35,78-83

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,  
AMD EPYC 9274F, 4.05 GHz

SPECrate®2017\_fp\_base = 794

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Mar-2024

Test Sponsor: Fujitsu

Hardware Availability: Feb-2024

Tested by: Fujitsu

Software Availability: Nov-2022

## Platform Notes (Continued)

```
node 5 size: 96765 MB
node 5 free: 96080 MB
node 6 cpus: 36-41,84-89
node 6 size: 96765 MB
node 6 free: 96143 MB
node 7 cpus: 42-47,90-95
node 7 size: 96711 MB
node 7 free: 96110 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10
```

-----  
9. /proc/meminfo  
MemTotal: 791632364 kB

-----  
10. who -r  
run-level 3 Mar 8 16:09

-----  
11. Systemd service manager version: systemd 250 (250-6.el9\_0)  
Default Target Status  
multi-user degraded

-----  
12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* dnf-makecache.service loaded failed dnf makecache

-----  
13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth  
chrony cron dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi  
iscsi-onboot kdump libstoragemgmt lm\_sensors lvm2-monitor mcelog mdmonitor microcode  
multipathd nis-domainname nvmefc-boot-connections pmcd pmie pmlogger rhsmcertd rsyslog  
selinux-autorelabel-mark smartd sshd sssd sysstat systemd-network-generator udisks2 upower  
enabled-runtime rc-local systemd-remount-fs  
disabled arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown  
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower debug-shell  
fancontrol grafana-server hwloc-dump-hwdata iprdump iprinit iprule update iscsid iscsiuio  
kpatch kvm\_stat ledmon man-db-restart-cache-update nftables nvmf-autoconnect pmfind  
pmie\_farm pmlogger\_farm pmproxy podman podman-auto-update podman-restart postfix powertop  
psacct ras-mc-ctl rasdaemon rdisc rhsm rhsm-facts rpmbuild rrddcached saslauthd  
serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext  
trace-cmd  
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-70.13.1.el9\_0.x86\_64  
root=/dev/mapper/rhel-root

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,  
AMD EPYC 9274F, 4.05 GHz

SPECrate®2017\_fp\_base = 794

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

## Platform Notes (Continued)

```
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

-----
15. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 4.05 GHz.
                The governor "performance" may decide which speed to use
                within this range.
boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 4050MHz

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

-----
17. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag             1
max_ptes_none      511
max_ptes_shared    256
max_ptes_swap      64
pages_to_scan      4096
scan_sleep_millisecs 10000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,  
AMD EPYC 9274F, 4.05 GHz

SPECrate®2017\_fp\_base = 794

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

## Platform Notes (Continued)

19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.0 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)  
system-release Red Hat Enterprise Linux release 9.0 (Plow)

20. Disk information  
SPEC is set to: /home/Benchmark/speccpu2017r  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel-home xfs 5.8T 60G 5.7T 2% /home

21. /sys/devices/virtual/dmi/id  
Vendor: FUJITSU  
Product: PRIMERGY RX2450 M2  
Product Family: SERVER  
Serial: xxxxxxxxxxxx

22. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
24x Samsung M321R4GA3BB6-CQKEG 32 GB 2 rank 4800

23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: FUJITSU // American Megatrends Inc.  
BIOS Version: V5.0.0.27 R1.4.0 for D4129-Alx  
BIOS Date: 01/30/2024  
BIOS Revision: 1.4  
Firmware Revision: 2.42

## Compiler Version Notes

=====  
C | 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
=====  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

=====  
C++ | 508.namd\_r(base) 510.parest\_r(base)  
=====  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,  
AMD EPYC 9274F, 4.05 GHz

SPECrate®2017\_fp\_base = 794

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

```
=====
C++, C           | 511.povray_r(base) 526.blender_r(base)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

=====
Fortran          | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

=====
Fortran, C       | 521.wrf_r(base) 527.cam4_r(base)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
```

## Base Compiler Invocation

C benchmarks:  
clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,  
AMD EPYC 9274F, 4.05 GHz

SPECrate®2017\_fp\_base = 794

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

## Base Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -fno -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -lamdlibm -lamdaloc -lflang

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,  
AMD EPYC 9274F, 4.05 GHz

SPECrate®2017\_fp\_base = 794

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100  
-finline-aggressive -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang
```

Fortran benchmarks:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,  
AMD EPYC 9274F, 4.05 GHz

SPECrate®2017\_fp\_base = 794

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive  
-funroll-loops -mllvm -lsl-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-Genoa-RevD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-Genoa-RevD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-08 22:37:57-0500.

Report generated on 2024-03-27 20:25:15 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-26.