



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 558

ThinkSystem SD520 V4
(1.90 GHz, Intel Xeon 6766E)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

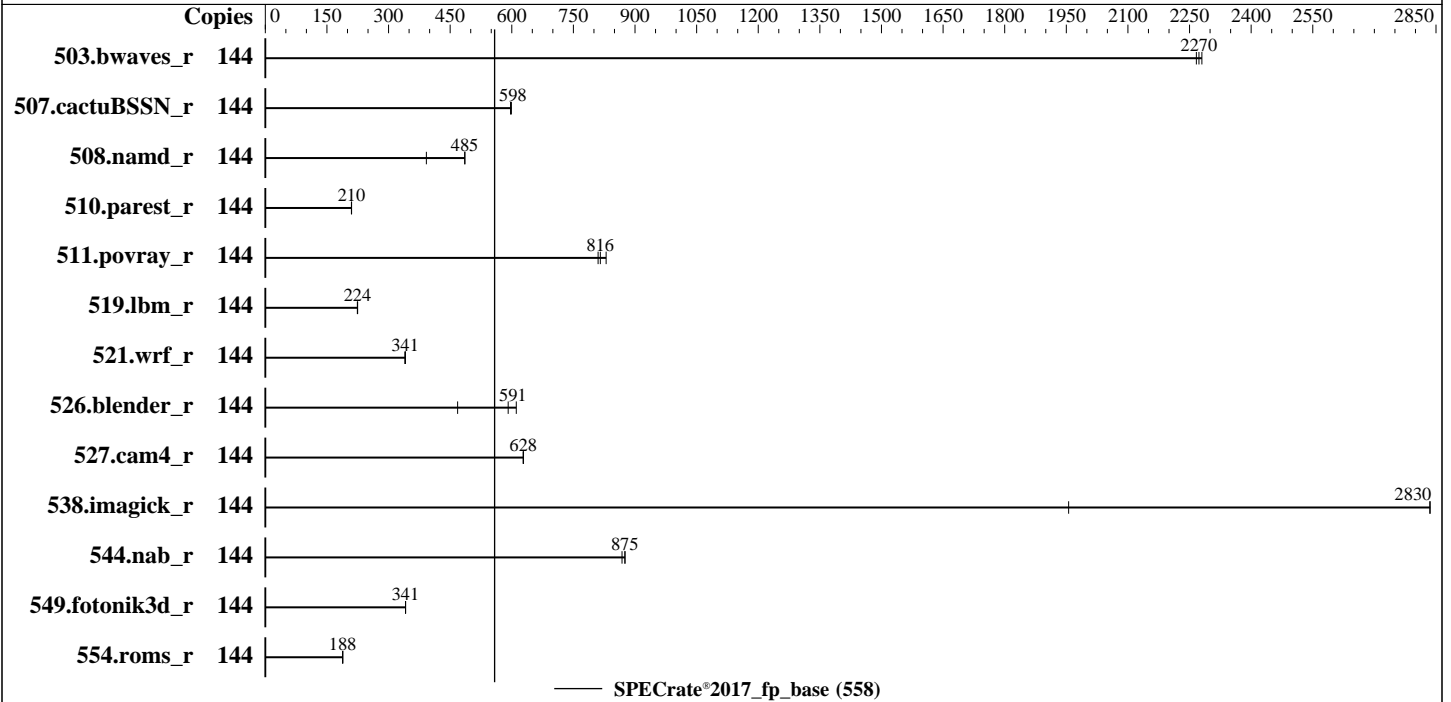

Hardware

CPU Name: Intel Xeon 6766E
 Max MHz: 2700
 Nominal: 1900
 Enabled: 144 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 4 MB I+D on chip per core
 L3: 108 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 960 GB NVME SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
 Kernel 6.4.0-150600.21-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Lenovo BIOS Version DBE103L 1.10 released Sep-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 558

ThinkSystem SD520 V4
(1.90 GHz, Intel Xeon 6766E)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	144	635	2270	637	2270	633	2280							
507.cactuBSSN_r	144	304	599	305	598	305	597							
508.namd_r	144	349	392	282	485	281	486							
510.parest_r	144	1796	210	1794	210	1797	210							
511.povray_r	144	405	830	412	816	415	810							
519.lbm_r	144	677	224	675	225	677	224							
521.wrf_r	144	947	341	949	340	946	341							
526.blender_r	144	371	591	359	611	468	468							
527.cam4_r	144	401	628	401	628	401	629							
538.imagick_r	144	183	1960	126	2830	126	2840							
544.nab_r	144	279	868	277	875	277	876							
549.fotonik3d_r	144	1643	341	1644	341	1644	341							
554.roms_r	144	1214	188	1216	188	1215	188							

SPECrate®2017_fp_base = 558

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD520 V4
(1.90 GHz, Intel Xeon 6766E)

SPECrate®2017_fp_base = 558

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Nov-2024

Software Availability: Jun-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Oct 25 01:11:01 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
01:11:02 up 3 min, 1 user, load average: 0.21, 0.15, 0.07
USER      TTY      FROM          LOGIN@      IDLE        JCPU       PCPU       WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD520 V4
(1.90 GHz, Intel Xeon 6766E)

SPECrate®2017_fp_base = 558

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Jun-2024

Platform Notes (Continued)

```

data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 2062019
max locked memory  (kbytes, -l) 8192
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 2062019
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh
sh Run703-compliant-ic2024.1-lin-sierraforest-ratefp-base-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 -c
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=72 --define
physicalfirst --define no-numa --reportable --tune base -o all --define drop_caches fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 --configfile
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=72 --define
physicalfirst --define no-numa --reportable --tune base --output_format all --define drop_caches --nopower
--runmode rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.307/templogs/preenv.fprate.307.0.log --lognum 307.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) 6766E
vendor_id      : GenuineIntel
cpu family     : 6
model          : 175
stepping       : 3
microcode      : 0x3000270
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 144
siblings       : 144
1 physical ids (chips)
144 processors (hardware threads)
physical id 0: core ids 0-143
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236
,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 558

ThinkSystem SD520 V4
(1.90 GHz, Intel Xeon 6766E)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Jun-2024

Platform Notes (Continued)

From lscpu from util-linux 2.39.3:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               52 bits physical, 48 bits virtual
Byte Order:                  Little Endian
CPU(s):                      144
On-line CPU(s) list:        0-143
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) 6766E
BIOS Model name:             Intel(R) Xeon(R) 6766E UNKNOWN CPU @ 1.9GHz
BIOS CPU family:            179
CPU family:                  6
Model:                       175
Thread(s) per core:         1
Core(s) per socket:         144
Socket(s):                   1
Stepping:                    3
BogoMIPS:                    3800.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                             xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                             ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                             vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                             rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec
                             xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             split_lock_detect user_shstk avx_vnni lam wbnoinvd dtherm ida arat
                             pln pts vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid
                             bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                             serialize pconfig arch_lbr ibt flush_lld arch_capabilities

Virtualization:              VT-x
L1d cache:                   4.5 MiB (144 instances)
L1i cache:                   9 MiB (144 instances)
L2 cache:                    144 MiB (36 instances)
L3 cache:                    108 MiB (1 instance)
NUMA node(s):                1
NUMA node0 CPU(s):          0-143
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:          Not affected
Vulnerability Mds:           Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:      Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                             PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 558

ThinkSystem SD520 V4
(1.90 GHz, Intel Xeon 6766E)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Jun-2024

Platform Notes (Continued)

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4.5M	8	Data	1	64	1	64
L1i	64K	9M	8	Instruction	1	128	1	64
L2	4M	144M	16	Unified	2	4096	1	64
L3	108M	108M	12	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-143
node 0 size: 515531 MB
node 0 free: 514261 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

```
MemTotal: 527904240 kB
```

10. who -r

```
run-level 3 Oct 25 01:08
```

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```
Default Target Status
multi-user running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsd nvme-fc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
indirect	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=003918da-aeca-4208-af37-126b2acc4e65
splash=silent
mitigations=auto
quiet
security=apparmor
```

14. cpupower frequency-info

```
analyzing CPU 50:
Unable to determine current policy
boost state support:
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD520 V4
(1.90 GHz, Intel Xeon 6766E)

SPECrate®2017_fp_base = 558

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Jun-2024

Platform Notes (Continued)

Supported: yes
Active: yes

```

-----
15. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3  xfs   893G   48G  846G   6% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Lenovo
Product:     ThinkSystem SD520 V4 Planar
Product Family: ThinkSystem
Serial:      1234567890

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD520 V4
(1.90 GHz, Intel Xeon 6766E)

SPECrate®2017_fp_base = 558

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Jun-2024

Platform Notes (Continued)

21. dmidecode

Additional information from dmidecode 3.4 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

6x Samsung M321R8GA0PB2-CCPKC 64 GB 2 rank 6400
2x Samsung M321R8GA0PB2-CCPWC 64 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:
BIOS Version: DBE103L-1.10
BIOS Date: 09/12/2024
BIOS Revision: 1.10
Firmware Revision: 1.10

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base) 510.parest_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 558

ThinkSystem SD520 V4
(1.90 GHz, Intel Xeon 6766E)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 558

ThinkSystem SD520 V4
(1.90 GHz, Intel Xeon 6766E)

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Jun-2024

Base Portability Flags (Continued)

544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-B.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD520 V4
(1.90 GHz, Intel Xeon 6766E)

SPECrate®2017_fp_base = 558

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Nov-2024

Software Availability: Jun-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-B.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-24 13:11:00-0400.

Report generated on 2024-11-20 11:12:24 by CPU2017 PDF formatter v6716.

Originally published on 2024-11-19.