



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen11

(3.20 GHz, AMD EPYC 9555)

SPECrate®2017\_fp\_base = 1680

SPECrate®2017\_fp\_peak = 1810

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2024

Hardware Availability: Nov-2024

Software Availability: Sep-2024

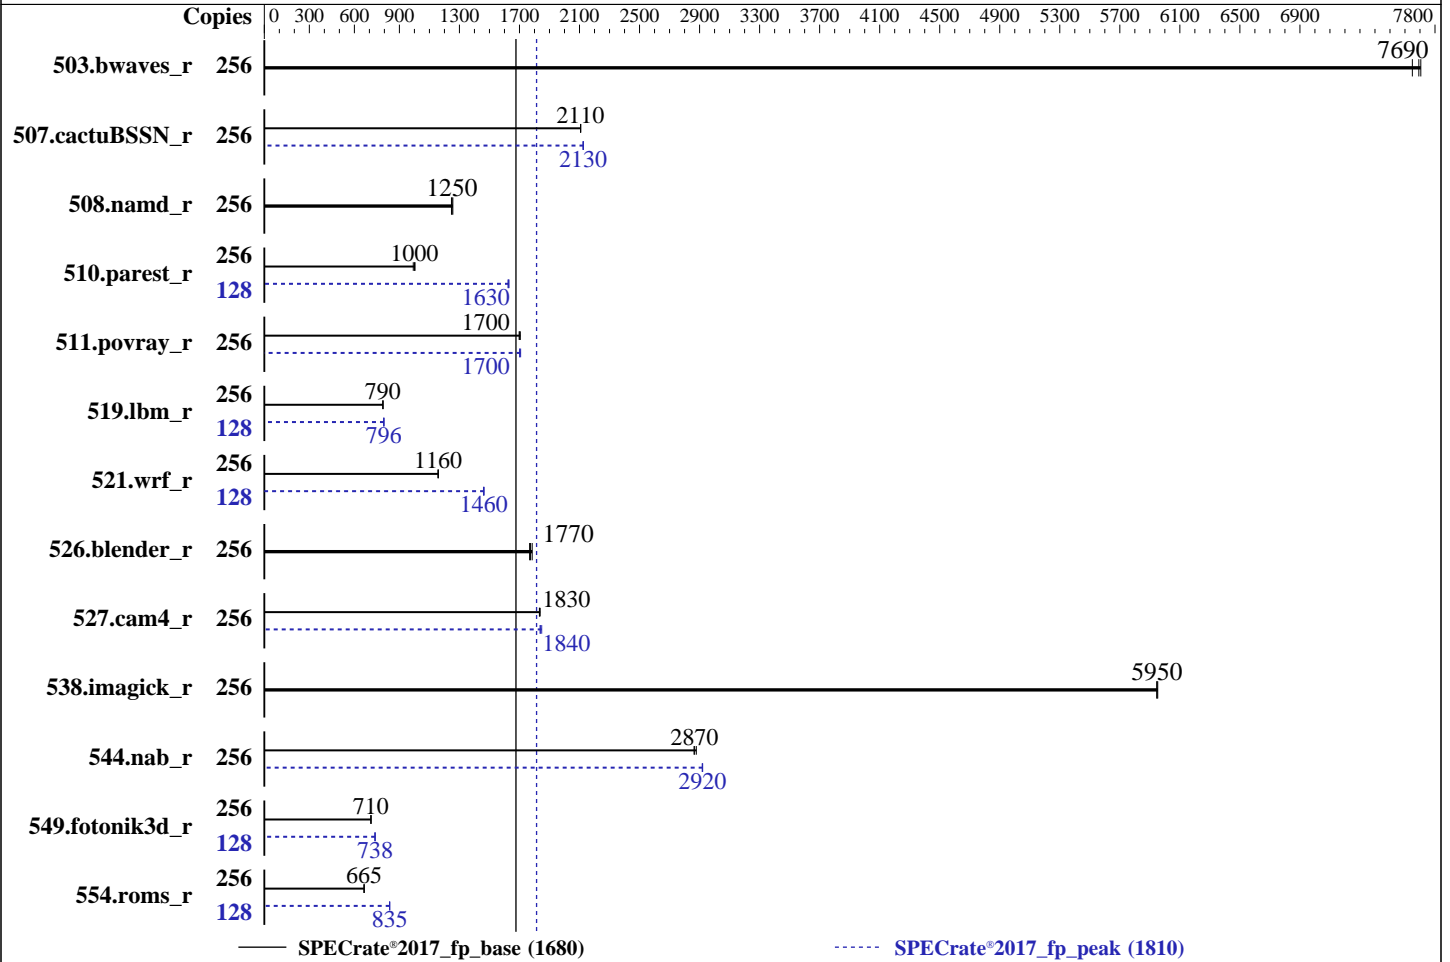

### Hardware

CPU Name: AMD EPYC 9555  
 Max MHz: 4400  
 Nominal: 3200  
 Enabled: 128 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 32 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R,  
 running at 6000)  
 Storage: 1 x 960 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: No  
 Firmware: HPE BIOS Version v2.20 10/31/2024 released  
 Oct-2024  
 File System: xfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at  
 the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.20 GHz, AMD EPYC 9555)

SPECrate®2017\_fp\_base = 1680

SPECrate®2017\_fp\_peak = 1810

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Nov-2024  
Hardware Availability: Nov-2024  
Software Availability: Sep-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	<b>334</b>	<b>7690</b>	336	7650	333	7710	256	<b>334</b>	<b>7690</b>	336	7650	333	7710
507.cactuBSSN_r	256	<b>154</b>	<b>2110</b>	154	2110	154	2110	256	<b>152</b>	<b>2130</b>	152	2130	153	2120
508.namd_r	256	194	1260	195	1250	<b>194</b>	<b>1250</b>	256	194	1260	195	1250	<b>194</b>	<b>1250</b>
510.parest_r	256	<b>669</b>	<b>1000</b>	667	1000	675	992	128	206	1620	205	1630	<b>206</b>	<b>1630</b>
511.povray_r	256	351	1710	<b>351</b>	<b>1700</b>	352	1700	256	350	1710	351	1700	<b>351</b>	<b>1700</b>
519.lbm_r	256	341	791	<b>341</b>	<b>790</b>	342	790	128	169	797	<b>169</b>	<b>796</b>	170	796
521.wrf_r	256	<b>495</b>	<b>1160</b>	495	1160	495	1160	128	<b>196</b>	<b>1460</b>	196	1460	196	1460
526.blender_r	256	218	1780	221	1770	<b>220</b>	<b>1770</b>	256	218	1780	221	1770	<b>220</b>	<b>1770</b>
527.cam4_r	256	244	1830	244	1840	<b>244</b>	<b>1830</b>	256	242	1850	<b>243</b>	<b>1840</b>	244	1840
538.imagick_r	256	<b>107</b>	<b>5950</b>	107	5950	107	5950	256	<b>107</b>	<b>5950</b>	107	5950	107	5950
544.nab_r	256	<b>150</b>	<b>2870</b>	150	2880	150	2860	256	148	2920	<b>148</b>	<b>2920</b>	148	2920
549.fotonik3d_r	256	<b>1405</b>	<b>710</b>	1405	710	1402	711	128	676	738	<b>676</b>	<b>738</b>	677	737
554.roms_r	256	612	665	<b>612</b>	<b>665</b>	612	665	128	244	834	243	835	<b>244</b>	<b>835</b>

SPECrate®2017\_fp\_base = 1680

SPECrate®2017\_fp\_peak = 1810

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.20 GHz, AMD EPYC 9555)

SPECrate®2017\_fp\_base = 1680

SPECrate®2017\_fp\_peak = 1810

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =

"/home/cpu2017/amd\_rate\_aocc500\_znver5\_A\_lib/lib:/home/cpu2017/amd\_rate\_aocc500\_znver5\_A\_lib/lib32:"

MALLOC\_CONF = "retain:true"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

NUMA memory domains per socket set to Four memory domains per socket

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.2

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Thu Nov 7 09:22:38 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(3.20 GHz, AMD EPYC 9555)

**SPECrate®2017\_fp\_base = 1680**

**SPECrate®2017\_fp\_peak = 1810**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Sep-2024

## Platform Notes (Continued)

```

10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```

```

-----
1. uname -a
Linux localhost.localdomain 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024
(36c1e09) x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
09:22:38 up 6 min, 3 users, load average: 0.12, 1.99, 1.54
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
root          :            22Apr24 ?xdm?   29:07   0.01s  gdm-session-worker [pam/gdm-password]
root  seat0  login-        22Apr24 0.00s   0.00s  0.00s  /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
root          :1          22Apr24 ?xdm?   29:07   0.00s  /usr/lib/gdm/gdm-x-session
--register-session --run-script gnome
root  pts/1  172.17.1.96   22Apr24 22.00s  0.96s  0.15s  /bin/bash ./amd_rate_aocc500_znver5_A1.sh

```

```

-----
3. Username
From environment variable $USER: root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 3094215
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 3094215
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.20 GHz, AMD EPYC 9555)

SPECrate®2017\_fp\_base = 1680

SPECrate®2017\_fp\_peak = 1810

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Sep-2024

## Platform Notes (Continued)

```
ssh: root@pts/1
-bash
python3 ./run_fprate.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

### 6. /proc/cpuinfo

```
model name      : AMD EPYC 9555 64-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00211a
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores       : 64
siblings        : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
physical id 1: apicids 128-255
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:  0-255
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:           AMD EPYC 9555 64-Core Processor
BIOS Model name:      AMD EPYC 9555 64-Core Processor
BIOS CPU family:      107
CPU family:           26
Model:                2
Thread(s) per core:   2
Core(s) per socket:   64
Socket(s):            2
Stepping:             1
Frequency boost:      enabled
CPU(s) scaling MHz:   100%
CPU max MHz:          3200.0000
CPU min MHz:          1500.0000
BogoMIPS:             6390.43
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL385 Gen11

(3.20 GHz, AMD EPYC 9555)

## SPECrate®2017\_fp\_base = 1680

## SPECrate®2017\_fp\_peak = 1810

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Sep-2024

## Platform Notes (Continued)

```
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_llc debug_swap
```

### Virtualization:

```
AMD-V
L1d cache: 6 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 128 MiB (128 instances)
L3 cache: 512 MiB (16 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-15,128-143
NUMA node1 CPU(s): 16-31,144-159
NUMA node2 CPU(s): 32-47,160-175
NUMA node3 CPU(s): 48-63,176-191
NUMA node4 CPU(s): 64-79,192-207
NUMA node5 CPU(s): 80-95,208-223
NUMA node6 CPU(s): 96-111,224-239
NUMA node7 CPU(s): 112-127,240-255
```

```
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

### From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 8 nodes (0-7)  
node 0 cpus: 0-15,128-143

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(3.20 GHz, AMD EPYC 9555)

**SPECrate®2017\_fp\_base = 1680**

**SPECrate®2017\_fp\_peak = 1810**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Sep-2024

## Platform Notes (Continued)

```

node 0 size: 96442 MB
node 0 free: 95753 MB
node 1 cpus: 16-31,144-159
node 1 size: 96759 MB
node 1 free: 96275 MB
node 2 cpus: 32-47,160-175
node 2 size: 96759 MB
node 2 free: 95881 MB
node 3 cpus: 48-63,176-191
node 3 size: 96759 MB
node 3 free: 95867 MB
node 4 cpus: 64-79,192-207
node 4 size: 96759 MB
node 4 free: 96356 MB
node 5 cpus: 80-95,208-223
node 5 size: 96759 MB
node 5 free: 96406 MB
node 6 cpus: 96-111,224-239
node 6 size: 96759 MB
node 6 free: 96378 MB
node 7 cpus: 112-127,240-255
node 7 size: 96585 MB
node 7 free: 95776 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      792150464 kB

```

```

-----
10. who -r
    run-level 5 Apr 22 17:30

```

```

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target   Status
    graphical        running

```

```

-----
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
           bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog
           lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
           wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime  systemd-remount-fs
disabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
           autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
           chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables
           exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd
           issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.20 GHz, AMD EPYC 9555)

SPECrate®2017\_fp\_base = 1680

SPECrate®2017\_fp\_peak = 1810

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Platform Notes (Continued)

```

ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysextd systemd-time-wait-sync
systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect pcsd saned@ systemd-userdbd wickedd

```

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=03804bb9-43a7-4bf1-b551-5c912b239e58
splash=silent
mitigations=auto
quiet
security=apparmor

```

-----  
14. cpupower frequency-info

```

analyzing CPU 55:
  current policy: frequency should be within 1.50 GHz and 3.20 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

-----  
15. tuned-adm active

No current active profile.

-----  
16. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

-----  
17. /sys/kernel/mm/transparent\_hugepage

```

defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(3.20 GHz, AMD EPYC 9555)

**SPECrate®2017\_fp\_base = 1680**

**SPECrate®2017\_fp\_peak = 1810**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Platform Notes (Continued)

```

alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6

```

```

-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdd2       xfs   892G  47G  845G   6% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:         HPE
Product:        ProLiant DL385 Gen11
Product Family: ProLiant
Serial:         DL385GEN11-001

```

```

-----
22. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  24x Hynix HMC88AHBRA472N 32 GB 2 rank 6400, configured at 6000

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:    HPE
BIOS Version:   2.20
BIOS Date:      10/31/2024
BIOS Revision:  2.20
Firmware Revision: 1.63

```

## Compiler Version Notes

```

=====
C          | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----

```

```

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----

```

```

=====
C++       | 508.namd_r(base, peak) 510.parest_r(base, peak)
-----

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

**(3.20 GHz, AMD EPYC 9555)**

**SPECrate®2017\_fp\_base = 1680**

**SPECrate®2017\_fp\_peak = 1810**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Nov-2024  
**Hardware Availability:** Nov-2024  
**Software Availability:** Sep-2024

## Compiler Version Notes (Continued)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.20 GHz, AMD EPYC 9555)

SPECrate®2017\_fp\_base = 1680

SPECrate®2017\_fp\_peak = 1810

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
 507.cactuBSSN\_r: -DSPEC\_LP64  
 508.namd\_r: -DSPEC\_LP64  
 510.parest\_r: -DSPEC\_LP64  
 511.povray\_r: -DSPEC\_LP64  
 519.lbm\_r: -DSPEC\_LP64  
 521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
 526.blender\_r: -funsigned-char -DSPEC\_LP64  
 527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
 538.imagick\_r: -DSPEC\_LP64  
 544.nab\_r: -DSPEC\_LP64  
 549.fotonik3d\_r: -DSPEC\_LP64  
 554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
 -Wl,-mllvm -Wl,-reduce-array-computations=3  
 -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -fltto  
 -fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.20 GHz, AMD EPYC 9555)

SPECrate®2017\_fp\_base = 1680

SPECrate®2017\_fp\_peak = 1810

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.20 GHz, AMD EPYC 9555)

SPECrate®2017\_fp\_base = 1680

SPECrate®2017\_fp\_peak = 1810

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.20 GHz, AMD EPYC 9555)

SPECrate®2017\_fp\_base = 1680

SPECrate®2017\_fp\_peak = 1810

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick\_r: basepeak = yes

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.20 GHz, AMD EPYC 9555)

SPECrate®2017\_fp\_base = 1680

SPECrate®2017\_fp\_peak = 1810

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Peak Optimization Flags (Continued)

C++ benchmarks:

508.namd\_r: basepeak = yes

```
510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

```
549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang
```

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

```
527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.20 GHz, AMD EPYC 9555)

SPECrate®2017\_fp\_base = 1680

SPECrate®2017\_fp\_peak = 1810

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Peak Optimization Flags (Continued)

527.cam4\_r (continued):

```
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

Benchmarks using both C and C++:

```
511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-faggressive-loop-transform -fvector-transform -fscalar-transform
-Mrecursive -fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL385 Gen11**

(3.20 GHz, AMD EPYC 9555)

**SPECrate®2017\_fp\_base = 1680**

**SPECrate®2017\_fp\_peak = 1810**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Nov-2024

**Hardware Availability:** Nov-2024

**Software Availability:** Sep-2024

## Peak Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-06 22:52:38-0500.

Report generated on 2024-12-05 10:01:05 by CPU2017 PDF formatter v6716.

Originally published on 2024-12-03.