



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066


Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

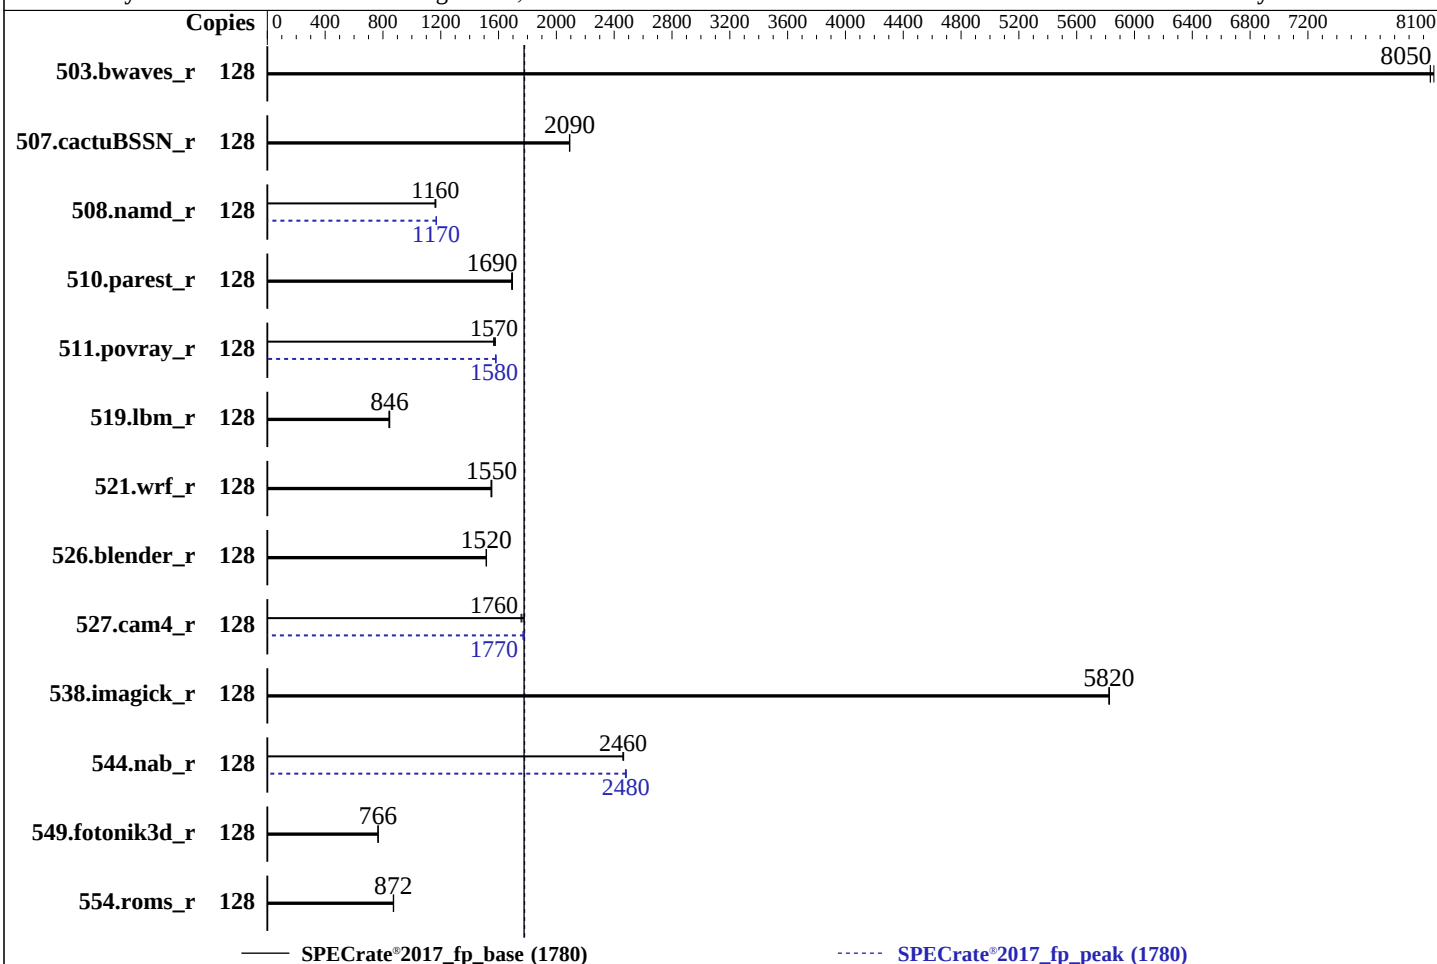

Hardware

CPU Name: AMD EPYC 9575F
Max MHz: 5000
Nominal: 3300
Enabled: 128 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 3.84TB SSD
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.1 LTS
kernel version 6.8.0-51-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 7.30.09 released Apr-2025
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	159	8070	<u>159</u>	<u>8050</u>	160	8050	128	159	8070	<u>159</u>	<u>8050</u>	160	8050
507.cactuBSSN_r	128	77.5	2090	77.5	2090	<u>77.5</u>	<u>2090</u>	128	77.5	2090	77.5	2090	<u>77.5</u>	<u>2090</u>
508.namd_r	128	<u>104</u>	<u>1160</u>	105	1160	104	1170	128	<u>104</u>	<u>1170</u>	104	1170	104	1170
510.parest_r	128	<u>198</u>	<u>1690</u>	197	1700	198	1690	128	<u>198</u>	<u>1690</u>	197	1700	198	1690
511.povray_r	128	189	1580	<u>190</u>	<u>1570</u>	191	1570	128	<u>189</u>	<u>1580</u>	189	1580	189	1580
519.lbm_r	128	160	841	<u>159</u>	<u>846</u>	159	846	128	160	841	<u>159</u>	<u>846</u>	159	846
521.wrf_r	128	<u>185</u>	<u>1550</u>	185	1550	185	1550	128	<u>185</u>	<u>1550</u>	185	1550	185	1550
526.blender_r	128	129	1520	<u>129</u>	<u>1520</u>	129	1510	128	129	1520	<u>129</u>	<u>1520</u>	129	1510
527.cam4_r	128	128	1760	126	1780	<u>127</u>	<u>1760</u>	128	127	1770	126	1780	<u>126</u>	<u>1770</u>
538.imagick_r	128	<u>54.7</u>	<u>5820</u>	54.6	5830	54.7	5820	128	<u>54.7</u>	<u>5820</u>	54.6	5830	54.7	5820
544.nab_r	128	<u>87.5</u>	<u>2460</u>	87.4	2470	87.5	2460	128	<u>86.9</u>	<u>2480</u>	<u>86.8</u>	<u>2480</u>	86.7	2480
549.fotonik3d_r	128	651	766	<u>651</u>	<u>766</u>	651	766	128	651	766	<u>651</u>	<u>766</u>	651	766
554.roms_r	128	<u>233</u>	<u>872</u>	233	874	233	872	128	<u>233</u>	<u>872</u>	233	874	233	872

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:/usr/local/mpc-131/lib:/usr/local/gmp-630/lib:/usr/local/mpfr-421/lib:/usr/local/isl-027/lib:/usr/local/gcc-1420/lib64:/usr/local/lib:/usr/lib:/usr/local/amd/aocc-compiler-5.0.0/lib:/usr/local/amd/aocc-compiler-5.0.0/lib32"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

SMT Control set to Disabled

SVM Mode set to Disabled

Power Profile Selection set to High Performance Mode

Determinism Slider set to Power

cTDP set to 400

PPT set to 400

NUMA nodes per socket set to NPS 4

L3 cache as NUMA domain set to Enabled

Memory Target Speed set to DDR6400

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on h3c Mon May 19 16:12:34 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Platform Notes (Continued)

```
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----

1. uname -a
Linux h3c 6.8.0-51-generic #52-Ubuntu SMP PREEMPT_DYNAMIC Thu Dec 5 13:09:44 UTC 2024 x86_64 x86_64 x86_64
GNU/Linux
-----

2. w
16:12:34 up 2 min, 2 users, load average: 1.30, 1.24, 0.53
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
root      172.17.53.33  16:11          1:50    0.00s  0.06s  sshd: root@pts/0
root      172.17.53.33  16:11          1:50    0.00s  0.04s  sshd: root@notty
-----

3. Username
From environment variable $USER: root
-----

4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3093805
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
-----

5. sysinfo process ancestry
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Platform Notes (Continued)

\$SPEC = /home/cpu2017

6. /proc/cpuinfo

```
model name      : AMD EPYC 9575F 64-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb002147
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 64
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0:  core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1:  core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 0:  apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1:  apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:         Little Endian
CPU(s):             128
On-line CPU(s) list: 0-127
Vendor ID:          AuthenticAMD
BIOS Vendor ID:     Advanced Micro Devices, Inc.
Model name:         AMD EPYC 9575F 64-Core Processor
BIOS Model name:    AMD EPYC 9575F 64-Core Processor
BIOS CPU family:    107
CPU family:         26
Model:              2
Thread(s) per core: 1
Core(s) per socket: 64
Socket(s):          2
Stepping:           1
Frequency boost:    enabled
CPU(s) scaling MHz: 50%
CPU max MHz:        5008.0000
CPU min MHz:        1200.0000
BogoMIPS:           6585.19
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                   pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                   rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                   extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                   sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                   cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                   osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                   perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                   ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                   smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                   avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Platform Notes (Continued)

xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap

L1d cache: 6 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 128 MiB (128 instances)
L3 cache: 512 MiB (16 instances)

NUMA node(s): 16
NUMA node0 CPU(s): 0-7
NUMA node1 CPU(s): 8-15
NUMA node2 CPU(s): 16-23
NUMA node3 CPU(s): 24-31
NUMA node4 CPU(s): 32-39
NUMA node5 CPU(s): 40-47
NUMA node6 CPU(s): 48-55
NUMA node7 CPU(s): 56-63
NUMA node8 CPU(s): 64-71
NUMA node9 CPU(s): 72-79
NUMA node10 CPU(s): 80-87
NUMA node11 CPU(s): 88-95
NUMA node12 CPU(s): 96-103
NUMA node13 CPU(s): 104-111
NUMA node14 CPU(s): 112-119
NUMA node15 CPU(s): 120-127

Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	16	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0-7

node 0 size: 47915 MB

node 0 free: 47646 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Platform Notes (Continued)

```
node 1 cpus: 8-15
node 1 size: 48381 MB
node 1 free: 47650 MB
node 2 cpus: 16-23
node 2 size: 48381 MB
node 2 free: 48251 MB
node 3 cpus: 24-31
node 3 size: 48381 MB
node 3 free: 48238 MB
node 4 cpus: 32-39
node 4 size: 48381 MB
node 4 free: 48229 MB
node 5 cpus: 40-47
node 5 size: 48381 MB
node 5 free: 48243 MB
node 6 cpus: 48-55
node 6 size: 48381 MB
node 6 free: 48273 MB
node 7 cpus: 56-63
node 7 size: 48381 MB
node 7 free: 48241 MB
node 8 cpus: 64-71
node 8 size: 48381 MB
node 8 free: 48247 MB
node 9 cpus: 72-79
node 9 size: 48381 MB
node 9 free: 48217 MB
node 10 cpus: 80-87
node 10 size: 48381 MB
node 10 free: 48229 MB
node 11 cpus: 88-95
node 11 size: 48381 MB
node 11 free: 48232 MB
node 12 cpus: 96-103
node 12 size: 48381 MB
node 12 free: 48229 MB
node 13 cpus: 104-111
node 13 size: 48337 MB
node 13 free: 48226 MB
node 14 cpus: 112-119
node 14 size: 48381 MB
node 14 free: 48227 MB
node 15 cpus: 120-127
node 15 size: 48314 MB
node 15 free: 48193 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
0: 10 11 12 12 12 12 12 12 22 22 22 22 22 22 22 22
1: 11 10 12 12 12 12 12 12 22 22 22 22 22 22 22 22
2: 12 12 10 11 12 12 12 12 22 22 22 22 22 22 22 22
3: 12 12 11 10 12 12 12 12 22 22 22 22 22 22 22 22
4: 12 12 12 12 10 11 12 12 22 22 22 22 22 22 22 22
5: 12 12 12 12 11 10 12 12 22 22 22 22 22 22 22 22
6: 12 12 12 12 12 12 10 11 22 22 22 22 22 22 22 22
7: 12 12 12 12 12 12 11 10 22 22 22 22 22 22 22 22
8: 22 22 22 22 22 22 22 22 10 11 12 12 12 12 12 12
9: 22 22 22 22 22 22 22 22 11 10 12 12 12 12 12 12
10: 22 22 22 22 22 22 22 22 12 12 10 11 12 12 12 12
11: 22 22 22 22 22 22 22 22 12 12 11 10 12 12 12 12
12: 22 22 22 22 22 22 22 22 12 12 12 10 11 12 12 12
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Platform Notes (Continued)

```
13: 22 22 22 22 22 22 22 22 22 12 12 12 12 11 10 12 12
14: 22 22 22 22 22 22 22 22 22 12 12 12 12 12 12 10 11
15: 22 22 22 22 22 22 22 22 22 12 12 12 12 12 12 11 10
```

```
9. /proc/meminfo
MemTotal: 792086912 kB
```

```
10. who -r
run-level 3 May 19 16:10
```

```
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
Default Target Status
multi-user running
```

```
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online apparmor
apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup
cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback
keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher open-iscsi
open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd sysstat systemd-networkd
systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald
ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysex
systemd-time-wait-sync upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
wpa_supplicant@
indirect systemd-sysupdate systemd-sysupdate-reboot uuid
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-6.8.0-51-generic
root=UUID=5079c432-fd48-464d-92df-94ceb7591bc8
ro
iommu=pt
amd_pstate=passive
```

```
14. cpupower frequency-info
analyzing CPU 5:
current policy: frequency should be within 1.20 GHz and 5.01 GHz.
The governor "schedutil" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
```

```
15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Platform Notes (Continued)

vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS

19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda4 ext4 3.4T 19G 3.2T 1% /

20. /sys/devices/virtual/dmi/id
Vendor: AMD Corporation
Product: Quartz
Product Family: Rack

21. dmidecode
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
10x Samsung M321R4GA3EB2-CCPKC 32 GB 2 rank 6400

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Platform Notes (Continued)

14x Samsung M321R4GA3PB2-CCPKC 32 GB 2 rank 6400

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 7.30.09
BIOS Date: 04/18/2025
BIOS Revision: 5.35
Firmware Revision: 2.2

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Base Portability Flags (Continued)

507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=2000000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlIBM -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlIBM -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlIBM -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Base Other Flags (Continued)

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

C++ benchmarks:

508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

Peak Optimization Flags (Continued)

527.cam4_r (continued):

-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: -m64 -std=c++14

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G7
AMD EPYC 9575F

SPECrate®2017_fp_base = 1780

SPECrate®2017_fp_peak = 1780

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: May-2025

Hardware Availability: Oct-2024

Software Availability: Dec-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.7-Turin.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V1.7-Turin.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-19 12:12:34-0400.

Report generated on 2025-06-03 15:45:55 by CPU2017 PDF formatter v6716.

Originally published on 2025-06-03.