SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9555 3.20 GHz Processor)

SPECrate®2017_fp_base = 1680

SPECrate®2017_fp_peak = 1830

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

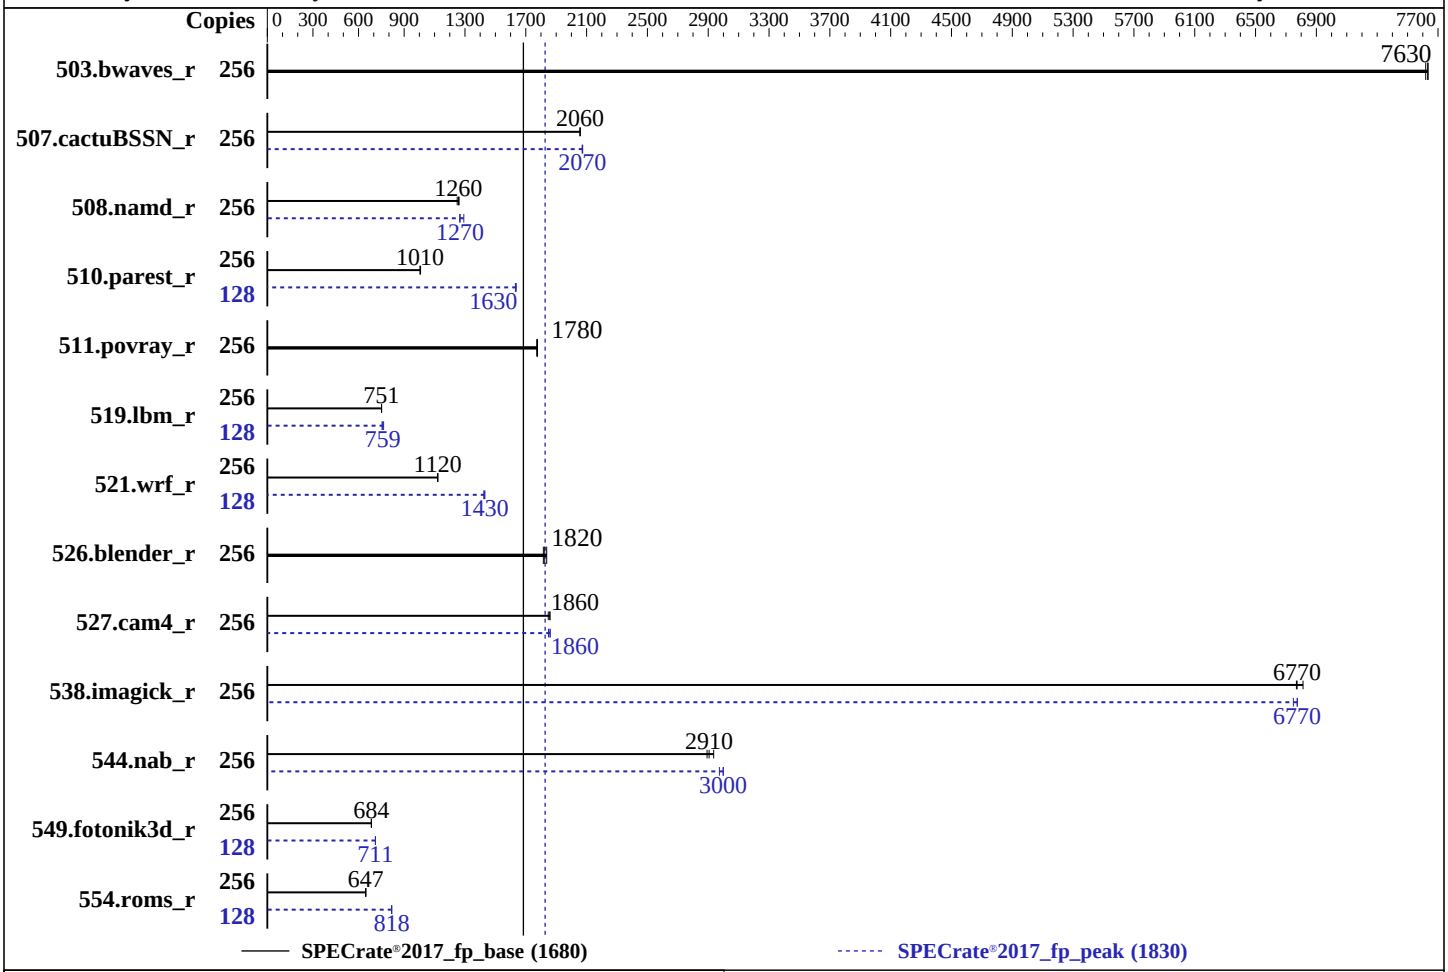

Hardware

CPU Name:	AMD EPYC 9555
Max MHz:	4400
Nominal:	3200
Enabled:	128 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)
Storage:	1 x 960 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 kernel version 6.4.0-150600.21-default
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	No
Firmware:	Version 4.3.5f released Feb-2025
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9555 3.20 GHz Processor)

SPECrate®2017_fp_base = 1680

SPECrate®2017_fp_peak = 1830

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	337	7620	336	7630	**336**	**7630**	256	337	7620	336	7630	**336**	**7630**
507.cactuBSSN_r	256	**158**	**2060**	157	2060	158	2060	256	156	2070	156	2070	**156**	**2070**
508.namd_r	256	195	1250	193	1260	**193**	**1260**	256	188	1290	**192**	**1270**	192	1260
510.parest_r	256	664	1010	**666**	**1010**	666	1000	128	205	1630	**205**	**1630**	205	1640
511.povray_r	256	336	1780	**337**	**1780**	337	1770	256	336	1780	**337**	**1780**	337	1770
519.lbm_r	256	359	752	**359**	**751**	359	751	128	**178**	**759**	179	754	176	765
521.wrf_r	256	512	1120	**512**	**1120**	511	1120	128	200	1430	201	1420	**201**	**1430**
526.blender_r	256	212	1840	**214**	**1820**	215	1820	256	212	1840	**214**	**1820**	215	1820
527.cam4_r	256	**241**	**1860**	242	1850	241	1860	256	242	1850	**241**	**1860**	241	1860
538.imagick_r	256	93.5	6810	**94.0**	**6770**	94.1	6770	256	**94.0**	**6770**	94.3	6750	94.0	6780
544.nab_r	256	147	2940	**148**	**2910**	149	2890	256	144	3000	**144**	**3000**	145	2970
549.fotonik3d_r	256	**1458**	**684**	1458	684	1457	685	128	701	711	702	711	**701**	**711**
554.roms_r	256	**629**	**647**	629	647	628	648	128	249	818	249	817	**249**	**818**

SPECrate®2017_fp_base = 1680

SPECrate®2017_fp_peak = 1830

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS settings:
NUMA nodes per socket set to NPS4
Determinism Slider set to Power
DF C-States set to Disabled
Enhanced CPU performance set to Auto


 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Thu May 29 05:09:26 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
```

(Continued on next page)

Platform Notes (Continued)

```
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   05:09:26 up 12:39,  3 users,  load average: 0.20, 0.05, 0.02
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                Wed16   30.00s  0.97s  0.18s /bin/bash ./amd_rate_aocc500_znver5_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 6190403
  max locked memory       (kbytes, -l) 2097152
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 6190403
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 python3 ./run_amd_rate_aocc500_znver5_A1.py -b fprate
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
6. /proc/cpuinfo
     model name      : AMD EPYC 9555 64-Core Processor
     vendor_id       : AuthenticAMD
     cpu family      : 26
     model           : 2
     stepping        : 1
     microcode       : 0xb00211e
     bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
     TLB size        : 192 4K pages
     cpu cores       : 64
     siblings        : 128
     2 physical ids (chips)
     256 processors (hardware threads)
     physical id 0: core ids 0-63
     physical id 1: core ids 0-63
     physical id 0: apicids 0-127
     physical id 1: apicids 128-255
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               256
   On-line CPU(s) list:                  0-255
   Vendor ID:                            AuthenticAMD
   BIOS Vendor ID:                       Advanced Micro Devices, Inc.
   Model name:                           AMD EPYC 9555 64-Core Processor
   BIOS Model name:                      AMD EPYC 9555 64-Core Processor                 Unknown CPU @ 3.2GHz
   BIOS CPU family:                      107
   CPU family:                           26
   Model:                                2
   Thread(s) per core:                   2
   Core(s) per socket:                   64
   Socket(s):                            2
   Stepping:                             1
   Frequency boost:                      enabled
   CPU(s) scaling MHz:                   73%
   CPU max MHz:                          4409.3750
   CPU min MHz:                          1500.0000
   BogoMIPS:                             6390.06
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                         rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                         extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                         sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                         cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                         osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                         perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                         ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                         smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                         avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                         xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                         cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                         xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
```

(Continued on next page)

Platform Notes (Continued)

```
                                  nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                  pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                  avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                  avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                  movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                  flush_l1d debug_swap
  Virtualization:                 AMD-V
  L1d cache:                      6 MiB (128 instances)
  L1i cache:                      4 MiB (128 instances)
  L2 cache:                       128 MiB (128 instances)
  L3 cache:                       512 MiB (16 instances)
  NUMA node(s):                   8
  NUMA node0 CPU(s):              0-15,128-143
  NUMA node1 CPU(s):              16-31,144-159
  NUMA node2 CPU(s):              32-47,160-175
  NUMA node3 CPU(s):              48-63,176-191
  NUMA node4 CPU(s):              64-79,192-207
  NUMA node5 CPU(s):              80-95,208-223
  NUMA node6 CPU(s):              96-111,224-239
  NUMA node7 CPU(s):              112-127,240-255
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                  always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1    64        1             64
     L1i       32K       4M    8 Instruction     1    64        1             64
     L2         1M     128M   16 Unified         2  1024        1             64
     L3        32M     512M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-15,128-143
  node 0 size: 193109 MB
  node 0 free: 192230 MB
  node 1 cpus: 16-31,144-159
  node 1 size: 193527 MB
  node 1 free: 192767 MB
  node 2 cpus: 32-47,160-175
  node 2 size: 193527 MB
  node 2 free: 192764 MB
  node 3 cpus: 48-63,176-191
  node 3 size: 193488 MB
  node 3 free: 192679 MB
  node 4 cpus: 64-79,192-207
```

(Continued on next page)

Platform Notes (Continued)

```
  node 4 size: 193527 MB
  node 4 free: 192732 MB
  node 5 cpus: 80-95,208-223
  node 5 size: 193527 MB
  node 5 free: 192797 MB
  node 6 cpus: 96-111,224-239
  node 6 size: 193527 MB
  node 6 free: 192724 MB
  node 7 cpus: 112-127,240-255
  node 7 size: 193391 MB
  node 7 free: 192706 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  32  32  32  32
    1:  12  10  12  12  32  32  32  32
    2:  12  12  10  12  32  32  32  32
    3:  12  12  12  10  32  32  32  32
    4:  32  32  32  32  10  12  12  12
    5:  32  32  32  32  12  10  12  12
    6:  32  32  32  32  12  12  10  12
    7:  32  32  32  32  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584770188 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 28 16:29

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
                   issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                   nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore
                   virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid
                   issue-add-ssh-keys kexec-load ksm kvm_stat libvirt-guests lunmask man-db-create multipathd
                   nfs nfs-blkmap nfs-server nfsserver rpcbind rpmconfigcheck rsyncd rtkit-daemon
                   serial-getty@ smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter svnserve
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-nspawn@
                   systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced
                   virtlockd virtlogd virtnetworkd virtnodedevd virtnwfilterd virtsecretd virtstoraged
  indirect         pcscd systemd-userdbd tftp wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=049c38d8-cbd8-44f5-87bc-70d9d0d63c0a
  splash=silent
  mitigations=auto
```

(Continued on next page)

Platform Notes (Continued)

```
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 6:
    current policy: frequency should be within 1.50 GHz and 3.20 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017
```

(Continued on next page)

Platform Notes (Continued)

```
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/nvme1n1p3 btrfs  929G   11G  915G   2% /home

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
     Vendor:         Cisco Systems Inc
     Product:        UCSX-215C-M8
     Product Family: Cisco UCS Rack Server
     Serial:         FCH282172ES

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     10x 0xCE00 M321R8GA0PB2-CCPEC 64 GB 2 rank 6400, configured at 6000
     14x 0xCE00 M321R8GA0PB2-CCPKC 64 GB 2 rank 6400, configured at 6000


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Cisco Systems, Inc.
    BIOS Version:      X215M8.4.3.5f.0.0218251523
    BIOS Date:         02/18/2025
    BIOS Revision:     5.35
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Benchmarks using both C and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

(Continued on next page)

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

538.imagick_r: Same as 519.lbm_r

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

C++ benchmarks:

508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

(Continued on next page)

Peak Optimization Flags (Continued)

510.parest_r: `-m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc -ldl`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -Mrecursive -mllvm -reduce-array-computations=3 -fepilog-vectorization-of-inductions -fvector-transform -fscalar-transform -lamdlibm -lamdalloc -ldl -lflang`

554.roms_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -Mrecursive -mllvm -reduce-array-computations=3 -fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc -ldl -lflang`

Benchmarks using both Fortran and C:

521.wrf_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -ldl -lflang`

527.cam4_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7 -mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000 -fremap-arrays`

(Continued on next page)

Peak Optimization Flags (Continued)

527.cam4_r (continued):
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-faggressive-loop-transform -fvector-transform -fscalar-transform
-Mrecursive -fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/aocc500-flags.html
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/aocc500-flags.xml
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-Turin-v1.1-revG.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-29 05:09:26-0400.
Report generated on 2025-06-17 18:16:47 by CPU2017 PS formatter v6716.
Originally published on 2025-06-17.