



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 398

PowerEdge XE9680 (Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_peak = 399

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

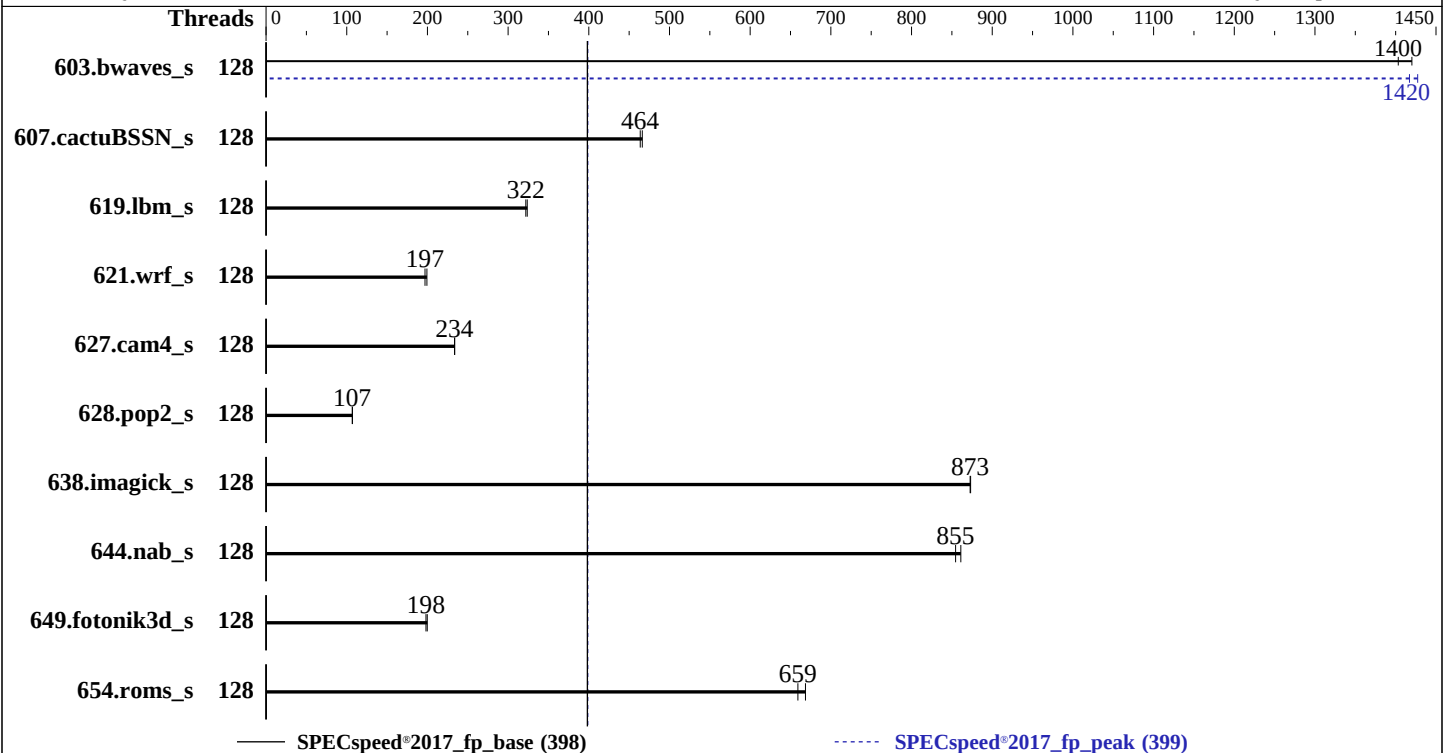

## Hardware

CPU Name: Intel Xeon Platinum 8592+  
Max MHz: 3900  
Nominal: 1900  
Enabled: 128 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 320 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)  
Storage: 80 GB on tmpfs  
Other: CPU Cooling: Air

## Software

OS: Red Hat Enterprise Linux 9.4 (Plow)  
5.14.0-427.13.1.el9\_4.x86\_64  
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++  
Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler  
for Linux;  
Parallel: Yes  
Firmware: Version 2.7.4 released Jul-2025  
File System: tmpfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost  
of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 398

PowerEdge XE9680 (Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_peak = 399

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Results Table

| Benchmark       | Base    |                    |                    |                    |                   |         |       | Peak    |                    |                    |                    |                   |         |       |
|-----------------|---------|--------------------|--------------------|--------------------|-------------------|---------|-------|---------|--------------------|--------------------|--------------------|-------------------|---------|-------|
|                 | Threads | Seconds            | Ratio              | Seconds            | Ratio             | Seconds | Ratio | Threads | Seconds            | Ratio              | Seconds            | Ratio             | Seconds | Ratio |
| 603.bwaves_s    | 128     | <b><u>42.0</u></b> | <b><u>1400</u></b> | 41.5               | 1420              |         |       | 128     | <b><u>41.6</u></b> | <b><u>1420</u></b> | 41.3               | 1430              |         |       |
| 607.cactuBSSN_s | 128     | <b><u>35.9</u></b> | <b><u>464</u></b>  | 35.8               | 466               |         |       | 128     | <b><u>35.9</u></b> | <b><u>464</u></b>  | 35.8               | 466               |         |       |
| 619.lbm_s       | 128     | <b><u>16.3</u></b> | <b><u>322</u></b>  | 16.2               | 324               |         |       | 128     | <b><u>16.3</u></b> | <b><u>322</u></b>  | 16.2               | 324               |         |       |
| 621.wrf_s       | 128     | 66.3               | 199                | <b><u>67.1</u></b> | <b><u>197</u></b> |         |       | 128     | 66.3               | 199                | <b><u>67.1</u></b> | <b><u>197</u></b> |         |       |
| 627.cam4_s      | 128     | <b><u>37.9</u></b> | <b><u>234</u></b>  | 37.9               | 234               |         |       | 128     | <b><u>37.9</u></b> | <b><u>234</u></b>  | 37.9               | 234               |         |       |
| 628.pop2_s      | 128     | <b><u>111</u></b>  | <b><u>107</u></b>  | 111                | 107               |         |       | 128     | <b><u>111</u></b>  | <b><u>107</u></b>  | 111                | 107               |         |       |
| 638.imagick_s   | 128     | <b><u>16.5</u></b> | <b><u>873</u></b>  | 16.5               | 873               |         |       | 128     | <b><u>16.5</u></b> | <b><u>873</u></b>  | 16.5               | 873               |         |       |
| 644.nab_s       | 128     | <b><u>20.4</u></b> | <b><u>855</u></b>  | 20.3               | 861               |         |       | 128     | <b><u>20.4</u></b> | <b><u>855</u></b>  | 20.3               | 861               |         |       |
| 649.fotonik3d_s | 128     | <b><u>46.0</u></b> | <b><u>198</u></b>  | 45.6               | 200               |         |       | 128     | <b><u>46.0</u></b> | <b><u>198</u></b>  | 45.6               | 200               |         |       |
| 654.roms_s      | 128     | 23.6               | 669                | <b><u>23.9</u></b> | <b><u>659</u></b> |         |       | 128     | 23.6               | 669                | <b><u>23.9</u></b> | <b><u>659</u></b> |         |       |

SPECspeed®2017\_fp\_base = 398

SPECspeed®2017\_fp\_peak = 399

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:

Logical Processor : Disabled

LLC Prefetch : Enabled

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 398

PowerEdge XE9680 (Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_peak = 399

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Platform Notes (Continued)

System Profile : Custom  
C-States : Autonomous  
Memory Patrol Scrub : Disabled  
Uncore Frequency : Dynamic  
DIMM Self Healing -

on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on 1234567-XE9680 Wed Sep 3 05:14:31 2025

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9\_4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a  
Linux 1234567-XE9680 5.14.0-427.13.1.el9\_4.x86\_64 #1 SMP PREEMPT\_DYNAMIC Wed Apr 10 10:29:16 EDT 2024  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
05:14:31 up 3 min, 1 user, load average: 0.22, 0.13, 0.05  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 05:12 23.00s 0.81s 0.00s /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh  
speed --define DL-VERS=6.3a --output\_format html,pdf,txt

3. Username  
From environment variable \$USER: root

4. ulimit -a

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 398

PowerEdge XE9680 (Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_peak = 399

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Platform Notes (Continued)

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126079
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126079
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.3a --output_format
html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.3a --output_format
html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=128 --tune base,peak -o all --define
drop_caches --iterations 2 --define DL-VERS=6.3a --output_format html,pdf,txt fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=128 --tune base,peak --output_format all
--define drop_caches --iterations 2 --define DL-VERS=6.3a --output_format html,pdf,txt --nopower --runmode
speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

### 6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) PLATINUM 8592+
vendor_id       : GenuineIntel
cpu family      : 6
model           : 207
stepping        : 2
microcode       : 0x210002b3
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores       : 64
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0:  core ids 0-63
physical id 1:  core ids 0-63
physical id 0:  apicids
0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72
, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126
physical id 1:  apicids
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 398

PowerEdge XE9680 (Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_peak = 399

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Platform Notes (Continued)

128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252, 254

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:    0-127
Vendor ID:              GenuineIntel
BIOS Vendor ID:         Intel
Model name:             INTEL(R) XEON(R) PLATINUM 8592+
BIOS Model name:        INTEL(R) XEON(R) PLATINUM 8592+
CPU family:             6
Model:                  207
Thread(s) per core:     1
Core(s) per socket:     64
Socket(s):              2
Stepping:                2
BogoMIPS:                3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                        rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                        xtopology nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq
                        dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                        avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                        cdp_l3 cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                        amx_int8 flush_l1d arch_capabilities
Virtualization:         VT-x
L1d cache:              6 MiB (128 instances)
L1i cache:              4 MiB (128 instances)
L2 cache:               256 MiB (128 instances)
L3 cache:               640 MiB (2 instances)
NUMA node(s):           2
NUMA node0 CPU(s):      0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126
NUMA node1 CPU(s):      1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47, 49, 51, 53, 55, 57, 59, 61, 63, 65, 67, 69, 71, 73, 75, 77, 79, 81, 83, 85, 87, 89, 91, 93, 95, 97, 99, 101, 103, 105, 107, 109, 111, 113, 115, 117, 119, 121, 123, 125, 127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                Not affected
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 398

PowerEdge XE9680 (Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_peak = 399

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Platform Notes (Continued)

Vulnerability Mds: Not affected  
Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS   | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| L1d  | 48K      | 6M       | 12   | Data        | 1     | 64     | 1        | 64             |
| L1i  | 32K      | 4M       | 8    | Instruction | 1     | 64     | 1        | 64             |
| L2   | 2M       | 256M     | 16   | Unified     | 2     | 2048   | 1        | 64             |
| L3   | 320M     | 640M     | 20   | Unified     | 3     | 262144 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus:

0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126

node 0 size: 515531 MB

node 0 free: 506593 MB

node 1 cpus:

1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39, 41, 43, 45, 47, 49, 51, 53, 55, 57, 59, 61, 63, 65, 67, 69, 71, 73, 75, 77, 79, 81, 83, 85, 87, 89, 91, 93, 95, 97, 99, 101, 103, 105, 107, 109, 111, 113, 115, 117, 119, 121, 123, 125, 127

node 1 size: 516032 MB

node 1 free: 504135 MB

node distances:

|      |    |    |
|------|----|----|
| node | 0  | 1  |
| 0:   | 10 | 21 |
| 1:   | 21 | 10 |

9. /proc/meminfo

MemTotal: 1056321076 kB

10. who -r

run-level 3 Sep 3 05:11

11. Systemd service manager version: systemd 252 (252-32.el9\_4)

|                |         |
|----------------|---------|
| Default Target | Status  |
| multi-user     | running |

12. Services, from systemctl list-unit-files

| STATE   | UNIT FILES                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled | NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator tuned udisks2 upower |

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 398

PowerEdge XE9680 (Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_peak = 399

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Platform Notes (Continued)

enabled-runtime systemd-remount-fs  
disabled arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown  
canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cpupower  
debug-shell dnf-system-upgrade hwloc-dump-hwdata iprdump iprinit iprupdate ipsec  
iscsi-init iscsid iscsiui kpatch kvm\_stat ledmon man-db-restart-cache-update nftables  
nvme-autoconnect pesign psacct rdisc rhcd rhsm rhsm-facts rpmdm-rebuild  
selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures  
systemd-pstore systemd-sysext  
indirect iscsi sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate  
systemd-sysupdate-reboot

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd6,gpt2)/vmlinuz-5.14.0-427.13.1.el9\_4.x86\_64  
root=/dev/mapper/rhel-root  
ro  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap  
rhgb  
quiet

-----  
14. cpupower frequency-info  
analyzing CPU 16:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

-----  
15. tuned-adm active  
Current active profile: throughput-performance

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 40  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 10  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvice [madvice] never  
enabled [always] madvice never

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 398

PowerEdge XE9680 (Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_peak = 399

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Platform Notes (Continued)

hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000  
-----

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 9.4 (Plow)  
redhat-release Red Hat Enterprise Linux release 9.4 (Plow)  
system-release Red Hat Enterprise Linux release 9.4 (Plow)  
-----

-----  
20. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 80G 5.0G 76G 7% /mnt/ramdisk  
-----

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: Dell Inc.  
Product: PowerEdge XE9680  
Product Family: PowerEdge  
Serial: 1234567  
-----

-----  
22. dmidecode  
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
16x 00AD063200AD HMC94AGBRA181N 64 GB 2 rank 5600  
-----

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Dell Inc.  
BIOS Version: 2.7.4  
BIOS Date: 07/02/2025  
BIOS Revision: 2.7  
-----

## Compiler Version Notes

=====

|   |                                                                       |
|---|-----------------------------------------------------------------------|
| C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak) |
|---|-----------------------------------------------------------------------|

-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 398

PowerEdge XE9680 (Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_peak = 399

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Compiler Version Notes (Continued)

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 398

PowerEdge XE9680 (Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_peak = 399

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Base Portability Flags (Continued)

627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC\_OPENMP -Wno-implicit-int  
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte  
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 398

PowerEdge XE9680 (Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_peak = 399

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -w -m64 -Wl, -z,muldefs -DSPEC\_OPENMP -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 398

PowerEdge XE9680 (Intel Xeon Platinum 8592+)

SPECspeed®2017\_fp\_peak = 399

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Sep-2025

Hardware Availability: Jun-2025

Software Availability: Apr-2024

## Peak Optimization Flags (Continued)

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.17x.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.17x.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-03 05:14:31-0400.

Report generated on 2025-10-07 16:37:13 by CPU2017 PDF formatter v6716.

Originally published on 2025-10-07.