SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 1650

SPECrate®2017_fp_peak = 1650

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

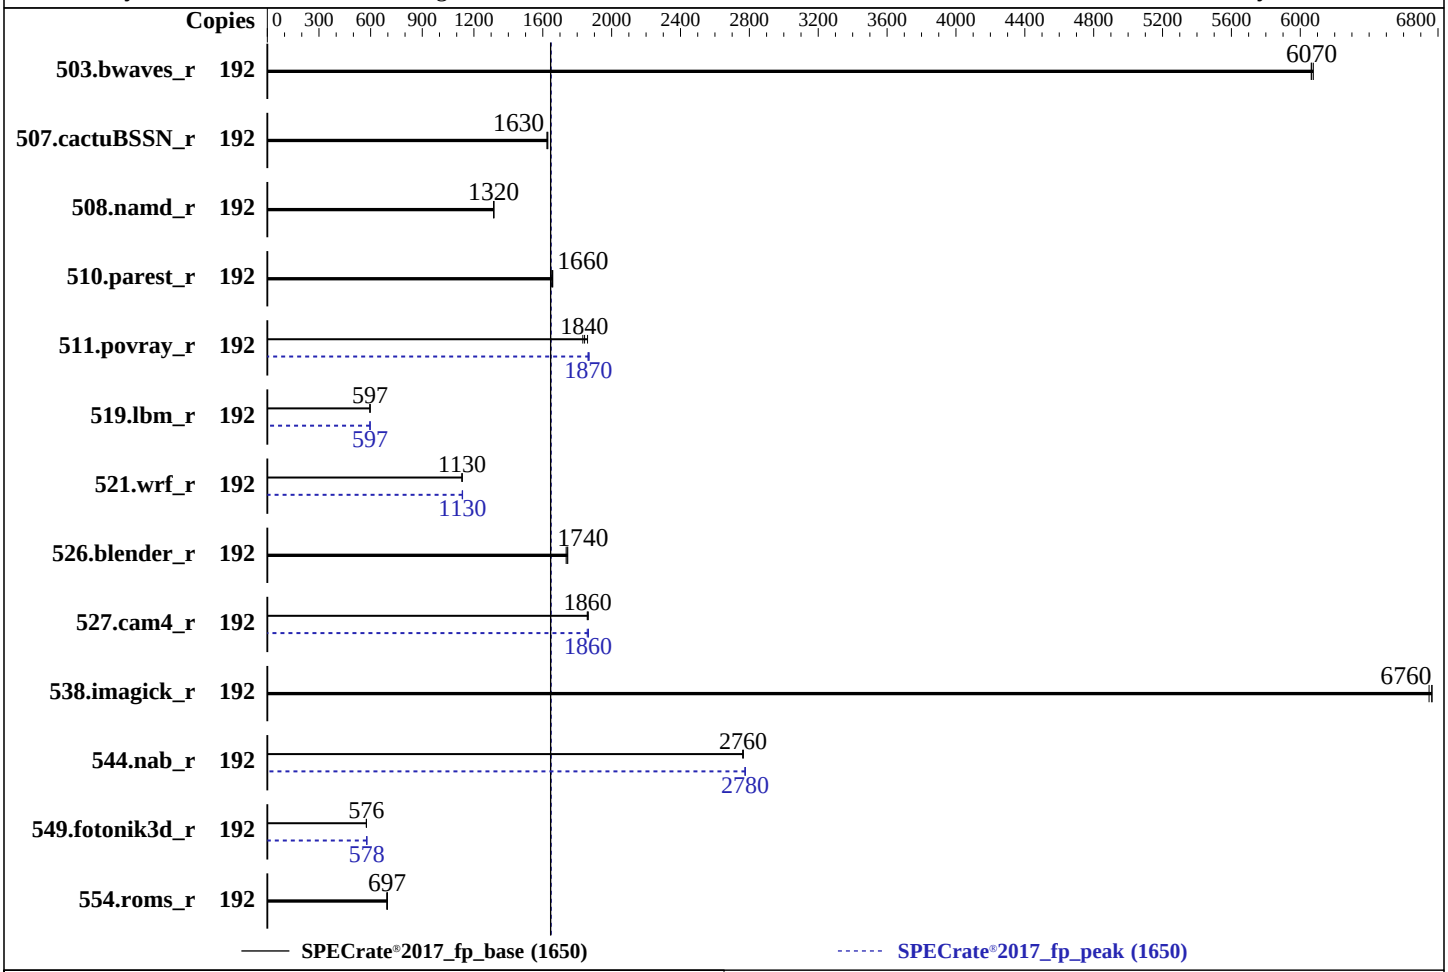

Hardware

CPU Name:	AMD EPYC 9654
Max MHz:	3700
Nominal:	2400
Enabled:	192 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 3.84TB SSD
Other:	CPU Cooling: Air

Software

OS:	Red Hat Enterprise Linux 9.4 (Plow) kernel version 5.14.0-427.13.1.el9_4.x86_64
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	No
Firmware:	Version 6.30.40 released Jun-2025
File System:	xfs
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

Copyright 2017-2025 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4950 G6
AMD EPYC 9654

SPECrate®2017_fp_base = 1650

SPECrate®2017_fp_peak = 1650

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	317	6080	318	6060	**317**	**6070**	192	317	6080	318	6060	**317**	**6070**
507.cactuBSSN_r	192	149	1630	**150**	**1630**	150	1630	192	149	1630	**150**	**1630**	150	1630
508.namd_r	192	139	1320	139	1310	**139**	**1320**	192	139	1320	139	1310	**139**	**1320**
510.parest_r	192	304	1650	**303**	**1660**	303	1660	192	304	1650	**303**	**1660**	303	1660
511.povray_r	192	245	1830	**243**	**1840**	241	1860	192	240	1870	241	1860	**240**	**1870**
519.lbm_r	192	**339**	**597**	339	597	339	596	192	339	597	**339**	**597**	339	596
521.wrf_r	192	380	1130	**380**	**1130**	380	1130	192	380	1130	**379**	**1130**	379	1130
526.blender_r	192	168	1740	168	1750	**168**	**1740**	192	168	1740	168	1750	**168**	**1740**
527.cam4_r	192	**180**	**1860**	180	1860	181	1860	192	181	1860	180	1870	**180**	**1860**
538.imagick_r	192	**70.6**	**6760**	70.6	6770	70.8	6750	192	**70.6**	**6760**	70.6	6770	70.8	6750
544.nab_r	192	117	2760	**117**	**2760**	117	2760	192	**116**	**2780**	116	2770	116	2780
549.fotonik3d_r	192	1300	575	1300	576	**1300**	**576**	192	**1296**	**578**	1296	577	1295	578
554.roms_r	192	437	698	**438**	**697**	440	694	192	437	698	**438**	**697**	440	694

SPECrate®2017_fp_base = 1650

SPECrate®2017_fp_peak = 1650

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:/op
     t/openmpi/lib:/usr/local/amd/aocc-compiler-5.0.0/lib:/usr/local/amd/aocc-compiler-5.0.0/lib32i:/usr/lo
     cal/amd/5.0.0/aocc/lib_LP64:/usr/local/mpc-131/lib:/usr/local/gmp-630/lib:/usr/local/mpfr-421/lib:/usr
     /local/isl-027/lib:/usr/local/gcc-1420/lib64:/usr/local/lib:/usr/lib"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS settings:
SMT Control set to Disabled
SVM Mode set to Disabled
Power Profile Selection set to High Performance Mode
Determinism Slider set to Power
cTDP set to 400
PPT set to 400
NUMA nodes per socket set to NPS 4

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Thu Oct 23 18:32:27 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
```

(Continued on next page)

Platform Notes (Continued)

```
 11. Systemd service manager version: systemd 252 (252-32.el9_4)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
  2024 x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   18:32:27 up 3 min,  1 user,  load average: 1.93, 4.05, 1.94
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/0     18:31   10.00s  1.19s  0.15s /bin/bash ./amd_rate_aocc500_znver5_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 6188713
  max locked memory           (kbytes, -l) 2097152
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 6188713
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 python3 ./run_amd_rate_aocc500_znver5_A1.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
```

(Continued on next page)

Platform Notes (Continued)

```
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9654 96-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 17
    stepping        : 1
    microcode       : 0xa101154
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 3584 4K pages
    cpu cores       : 96
    siblings        : 96
    2 physical ids (chips)
    192 processors (hardware threads)
    physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
    physical id 1: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
    physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183
    physical id 1: apicids
    256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               192
  On-line CPU(s) list:                  0-191
  Vendor ID:                            AuthenticAMD
  BIOS Vendor ID:                       Advanced Micro Devices, Inc.
  Model name:                           AMD EPYC 9654 96-Core Processor
  BIOS Model name:                      AMD EPYC 9654 96-Core Processor
  CPU family:                           25
  Model:                                17
  Thread(s) per core:                   1
  Core(s) per socket:                   96
  Socket(s):                            2
  Stepping:                             1
  Frequency boost:                      enabled
  CPU(s) scaling MHz:                   65%
  CPU max MHz:                          3707.8120
  CPU min MHz:                          1500.0000
  BogoMIPS:                             4788.76
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                                        lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
                                        aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
                                        x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy
                                        extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit
                                        wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
```

(Continued on next page)

Platform Notes (Continued)

```
                                cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
                                ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm
                                rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                                avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
                                cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx512_bf16 clzero
                                irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                                avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca
                                fsrm flush_l1d debug_swap
  L1d cache:                    6 MiB (192 instances)
  L1i cache:                    6 MiB (192 instances)
  L2 cache:                     192 MiB (192 instances)
  L3 cache:                     768 MiB (24 instances)
  NUMA node(s):                 8
  NUMA node0 CPU(s):            0-23
  NUMA node1 CPU(s):            24-47
  NUMA node2 CPU(s):            48-71
  NUMA node3 CPU(s):            72-95
  NUMA node4 CPU(s):            96-119
  NUMA node5 CPU(s):            120-143
  NUMA node6 CPU(s):            144-167
  NUMA node7 CPU(s):            168-191
  Vulnerability Gather data sampling: Not affected
  Vulnerability Itlb multihit:  Not affected
  Vulnerability L1tf:           Not affected
  Vulnerability Mds:            Not affected
  Vulnerability Meltdown:       Not affected
  Vulnerability Mmio stale data: Not affected
  Vulnerability Retbleed:       Not affected
  Vulnerability Spec rstack overflow: Vulnerable
  Vulnerability Spec store bypass: Vulnerable
  Vulnerability Spectre v1:     Vulnerable: __user pointer sanitization and usercopy barriers only; no
                                swapgs barriers
  Vulnerability Spectre v2:     Vulnerable, IBPB: disabled, STIBP: disabled, PBRSB-eIBRS: Not affected
  Vulnerability Srbds:          Not affected
  Vulnerability Tsx async abort: Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       6M    8 Data            1    64        1             64
     L1i       32K       6M    8 Instruction     1    64        1             64
     L2         1M     192M    8 Unified         2  2048        1             64
     L3        32M     768M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-23
  node 0 size: 192637 MB
  node 0 free: 191896 MB
  node 1 cpus: 24-47
  node 1 size: 193529 MB
  node 1 free: 192999 MB
  node 2 cpus: 48-71
  node 2 size: 193529 MB
  node 2 free: 193033 MB
  node 3 cpus: 72-95
```

(Continued on next page)

Platform Notes (Continued)

```
  node 3 size: 193529 MB
  node 3 free: 192816 MB
  node 4 cpus: 96-119
  node 4 size: 193529 MB
  node 4 free: 192945 MB
  node 5 cpus: 120-143
  node 5 size: 193529 MB
  node 5 free: 192817 MB
  node 6 cpus: 144-167
  node 6 size: 193529 MB
  node 6 free: 193064 MB
  node 7 cpus: 168-191
  node 7 size: 193425 MB
  node 7 free: 192890 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  32  32  32  32
    1:  12  10  12  12  32  32  32  32
    2:  12  12  10  12  32  32  32  32
    3:  12  12  12  10  32  32  32  32
    4:  32  32  32  32  10  12  12  12
    5:  32  32  32  32  12  10  12  12
    6:  32  32  32  32  12  12  10  12
    7:  32  32  32  32  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584375336 kB

------------------------------------------------------------
10. who -r
  run-level 5 Oct 23 18:30

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-32.el9_4)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
                   getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt
                   low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                   nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
                   rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
                   systemd-boot-update systemd-network-generator tuned udisks2 upower vgauthd vmtoolsd
  enabled-runtime  rc-local systemd-remount-fs
  disabled         arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait chronyd-restricted cni-dhcp console-getty
                   cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq firewalld
                   hwloc-dump-hwdata iprdump iprinit iprupdate iscsi-init iscsid iscsiuio kpatch kvm_stat
                   ledmon man-db-restart-cache-update netavark-dhcp-proxy netavark-firewalld-reload nftables
                   nvmf-autoconnect ostree-readonly-sysroot-migration ostree-state-overlay@ podman
                   podman-auto-update podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl
                   rasdaemon rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable
                   serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures
                   systemd-pstore systemd-sysext wpa_supplicant
  indirect         iscsi spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

(Continued on next page)

Platform Notes (Continued)

```
                  systemd-sysupdate systemd-sysupdate-reboot

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
  root=/dev/mapper/rhel-root
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  rhgb
  quiet
  iommu=pt
  mitigations=off

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 123:
    current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2400MHz

------------------------------------------------------------
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
```

(Continued on next page)

Platform Notes (Continued)

```
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.4 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
  system-release Red Hat Enterprise Linux release 9.4 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   3.5T   49G  3.4T   2% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         H3C
    Product:        RS33M2C9S
    Product Family: Rack
    Serial:         N/A

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    24x Micron Technology MTC40F2046S1RC48BA1 64 GB 2 rank 4800


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      6.30.40
   BIOS Date:         06/18/2025
   BIOS Revision:     5.27
```

Compiler Version Notes

```
==============================================================================================================
C              | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

C++ benchmarks:
```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Fortran benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl
```

Benchmarks using both Fortran and C:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:
```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

538.imagick_r: basepeak = yes

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000

(Continued on next page)

Peak Optimization Flags (Continued)

544.nab_r (continued):
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

511.povray_r: `-m64 -std=c++14`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-x86-use-vzeroupper=false`
`-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5`
`-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7`
`-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000`
`-fremap-arrays -mllvm -reduce-array-computations=3 -zopt`
`-mllvm -unroll-threshold=100`
`-mllvm -loop-unswitch-threshold=200000 -lamdlibm`
`-lamdalloc -ldl`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html
http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V2.0-Turin.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml
http://www.spec.org/cpu2017/flags/New_H3C-Platform-AMD-Settings-V2.0-Turin.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-10-23 18:32:26-0400.
Report generated on 2025-11-19 10:38:35 by CPU2017 PS formatter v6716.
Originally published on 2025-11-18.