SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288 V8 (Intel Xeon 6740P)

SPECspeed®2017_fp_base = 382

SPECspeed®2017_fp_peak = 382

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: May-2025
Software Availability: Apr-2024

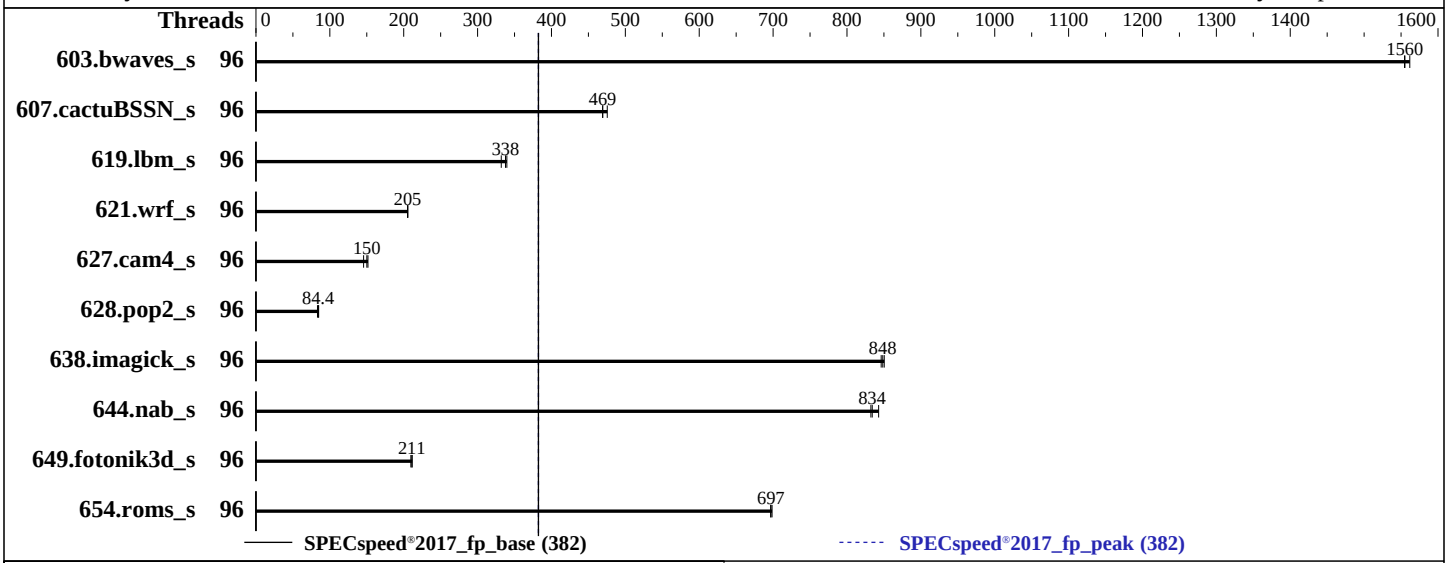

Hardware

CPU Name:	Intel Xeon 6740P
Max MHz:	3800
Nominal:	2100
Enabled:	96 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	288 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 16 TB SATA III HDD, 7200 RPM
Other:	CPU Cooling: Air

Software

OS:	Red Hat Enterprise Linux 9.4 (Plow) 5.14.0-427.13.1.el9_4.x86_64
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version 00.31.01.04 Released Aug-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288 V8 (Intel Xeon 6740P)

SPECspeed®2017_fp_base = 382

SPECspeed®2017_fp_peak = 382

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Oct-2025
Hardware Availability: May-2025
Software Availability: Apr-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	**37.9**	**1560**	37.9	1550	37.8	1560	96	**37.9**	**1560**	37.9	1550	37.8	1560
607.cactuBSSN_s	96	35.1	476	**35.5**	**469**	35.5	469	96	35.1	476	**35.5**	**469**	35.5	469
619.lbm_s	96	15.4	340	15.8	332	**15.5**	**338**	96	15.4	340	15.8	332	**15.5**	**338**
621.wrf_s	96	64.4	205	**64.4**	**205**	64.3	206	96	64.4	205	**64.4**	**205**	64.3	206
627.cam4_s	96	**59.1**	**150**	58.5	152	60.8	146	96	**59.1**	**150**	58.5	152	60.8	146
628.pop2_s	96	140	84.8	**141**	**84.4**	143	83.3	96	140	84.8	**141**	**84.4**	143	83.3
638.imagick_s	96	**17.0**	**848**	17.0	846	17.0	850	96	**17.0**	**848**	17.0	846	17.0	850
644.nab_s	96	20.7	843	21.0	832	**20.9**	**834**	96	20.7	843	21.0	832	**20.9**	**834**
649.fotonik3d_s	96	**43.2**	**211**	43.5	210	43.1	211	96	**43.2**	**211**	43.5	210	43.1	211
654.roms_s	96	**22.6**	**697**	22.6	697	22.5	699	96	**22.6**	**697**	22.6	697	22.5	699

SPECspeed®2017_fp_base = 382

SPECspeed®2017_fp_peak = 382

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-95
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/QYL/cpu2017/lib/intel64:/home/QYL/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Redhat Enterprise Linux 8.0
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Performance Profile Set to Load Balance
```

(Continued on next page)

Platform Notes (Continued)

```
Enable LP [Global] Set to Single LP
Latency Optimized Mode Set to Enabled
LLC dead line alloc Set to Disabled
SNC Set to Disabled

Sysinfo program /home/QYL/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu Oct 23 17:08:45 2025

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
  2024 x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   17:08:45 up 50 min,  3 users,  load average: 0.34, 2.76, 4.97
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1      16:20   13.00s  0.95s  0.01s sh run_speed.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
```

(Continued on next page)

Platform Notes (Continued)

```
   file size                    (blocks, -f) unlimited
   pending signals                      (-i) 4123859
   max locked memory            (kbytes, -l) unlimited
   max memory size              (kbytes, -m) unlimited
   open files                           (-n) 1024
   pipe size                 (512 bytes, -p) 8
   POSIX message queues          (bytes, -q) 819200
   real-time priority                   (-r) 0
   stack size                   (kbytes, -s) unlimited
   cpu time                    (seconds, -t) unlimited
   max user processes                   (-u) 4123859
   virtual memory               (kbytes, -v) unlimited
   file locks                           (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 31
 login -- root
 -bash
 sh run_speed.sh
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=96 --tune base,peak -o all --define
   drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=96 --tune base,peak --output_format all
   --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/QYL/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6740P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x10003c2
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 48
    siblings        : 48
    2 physical ids (chips)
    96 processors (hardware threads)
    physical id 0: core ids 0-23,64-87
    physical id 1: core ids 0-23,64-87
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,128,130,132,134,136,138,140,142,144,14
    6,148,150,152,154,156,158,160,162,164,166,168,170,172,174
    physical id 1: apicids
    256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,384,386,3
    88,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                        x86_64
```

(Continued on next page)

Platform Notes (Continued)

```
CPU op-mode(s):                  32-bit, 64-bit
Address sizes:                   52 bits physical, 57 bits virtual
Byte Order:                      Little Endian
CPU(s):                          96
On-line CPU(s) list:             0-95
Vendor ID:                       GenuineIntel
BIOS Vendor ID:                  Intel(R) Corporation
Model name:                      Intel(R) Xeon(R) 6740P
BIOS Model name:                 Intel(R) Xeon(R) 6740P
CPU family:                      6
Model:                           173
Thread(s) per core:              1
Core(s) per socket:              48
Socket(s):                       2
Stepping:                        1
Frequency boost:                 enabled
CPU(s) scaling MHz:              100%
CPU max MHz:                     2101.0000
CPU min MHz:                     800.0000
BogoMIPS:                        4200.00
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                                 rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                                 xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                                 dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                                 pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                                 avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                                 cdp_l3 cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                 flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                                 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                 clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
                                 xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                 split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                                 vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                 vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                 bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                 serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                 amx_int8 flush_l1d arch_capabilities
Virtualization:                  VT-x
L1d cache:                       4.5 MiB (96 instances)
L1i cache:                       6 MiB (96 instances)
L2 cache:                        192 MiB (96 instances)
L3 cache:                        576 MiB (2 instances)
NUMA node(s):                    2
NUMA node0 CPU(s):               0-47
NUMA node1 CPU(s):               48-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
Vulnerability Mmio stale data:   Not affected
Vulnerability Retbleed:          Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:        Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                                 PBRSB-eIBRS Not affected
Vulnerability Srbds:             Not affected
Vulnerability Tsx async abort:   Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     4.5M   12 Data            1     64        1             64
     L1i       64K       6M   16 Instruction     1     64        1             64
     L2         2M     192M   16 Unified         2   2048        1             64
     L3       288M     576M   16 Unified         3 294912        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-47
  node 0 size: 514962 MB
  node 0 free: 510540 MB
  node 1 cpus: 48-95
  node 1 size: 516078 MB
  node 1 free: 514627 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055785236 kB

------------------------------------------------------------
10. who -r
  run-level 3 Oct 23 16:20 last=5

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-32.el9_4)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon atd auditd avahi-daemon bluetooth crond cups dbus-broker gdm getty@
                   insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt libvirtd
                   low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                   nvmefc-boot-connections openibd ostree-remount power-profiles-daemon qemu-guest-agent
                   rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd
                   switcheroo-control sysstat systemd-boot-update systemd-network-generator tuned udisks2
                   upower vgauthd virtqemud vmtoolsd
  enabled-runtime  systemd-remount-fs
  disabled         arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait chronyd chronyd-restricted cni-dhcp
                   console-getty cpupower cups-browsed dbus-daemon debug-shell dhcpd dhcpd6
                   dnf-system-upgrade dnsmasq firewalld gssproxy ibacm iprdump iprinit iprupdate iscsi-init
                   iscsid iscsiuio kpatch kvm_stat ledmon libvirt-guests lldpad lldpd
                   man-db-restart-cache-update netavark-dhcp-proxy netavark-firewalld-reload nfs-blkmap
                   nfs-server nftables numad nvmf-autoconnect opensmd opensmd@
                   ostree-readonly-sysroot-migration ostree-state-overlay@ podman podman-auto-update
                   podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd
                   rhsm rhsm-facts rpmdb-rebuild rshim saslauthd selinux-check-proper-disable
                   speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@ systemd-boot-check-no-failures
                   systemd-nspawn@ systemd-pstore systemd-sysext virtinterfaced virtlockd virtlogd
```

(Continued on next page)

Platform Notes (Continued)

```
                  virtnetworkd virtnodedevd virtnwfilterd virtproxyd virtsecretd virtstoraged wpa_supplicant
  indirect        iscsi serial-getty@ spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam
                  sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
  root=/dev/mapper/rhel-root
  ro
  console=tty0
  console=ttyS0,115200
  intel_iommu=on
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  nohz_full=1-95

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 5:
    current policy: frequency should be within 800 MHz and 2.10 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.4 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
  system-release Red Hat Enterprise Linux release 9.4 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/QYL/cpu2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs    15T  207G   15T   2% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         XFUSION
    Product:        2288 V8
    Product Family: Birch Stream

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    11x Hynix HMCG94AHBRA481N 64 GB 2 rank 6400
    5x Hynix HMCG94AHBRA485N 64 GB 2 rank 6400


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       XFUSION
   BIOS Version:      00.31.01.04
   BIOS Date:         08/11/2025
   BIOS Revision:     1.4
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl

(Continued on next page)

Base Portability Flags (Continued)

638.imagick_s: `-DSPEC_LP64`
644.nab_s: `-DSPEC_LP64`
649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Fortran benchmarks:
`-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Benchmarks using both Fortran and C:
`-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Benchmarks using Fortran, C, and C++:
`-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Peak Compiler Invocation

C benchmarks:
`icx`

Fortran benchmarks:
`ifx`

(Continued on next page)

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `basepeak = yes`

644.nab_s: `basepeak = yes`

Fortran benchmarks:

603.bwaves_s: `basepeak = yes`

649.fotonik3d_s: `basepeak = yes`

654.roms_s: `basepeak = yes`

Benchmarks using both Fortran and C:

621.wrf_s: `basepeak = yes`

627.cam4_s: `basepeak = yes`

628.pop2_s: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.1.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.1.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-10-23 05:08:45-0400.
Report generated on 2025-11-19 10:38:47 by CPU2017 PS formatter v6716.
Originally published on 2025-11-18.