# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL345 Gen12
(3.55 GHz, AMD EPYC 9355P)

**SPECspeed®2017_fp_base = 292**

**SPECspeed®2017_fp_peak = 301**

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Sep-2025
**Hardware Availability:** Aug-2025
**Software Availability:** Oct-2024

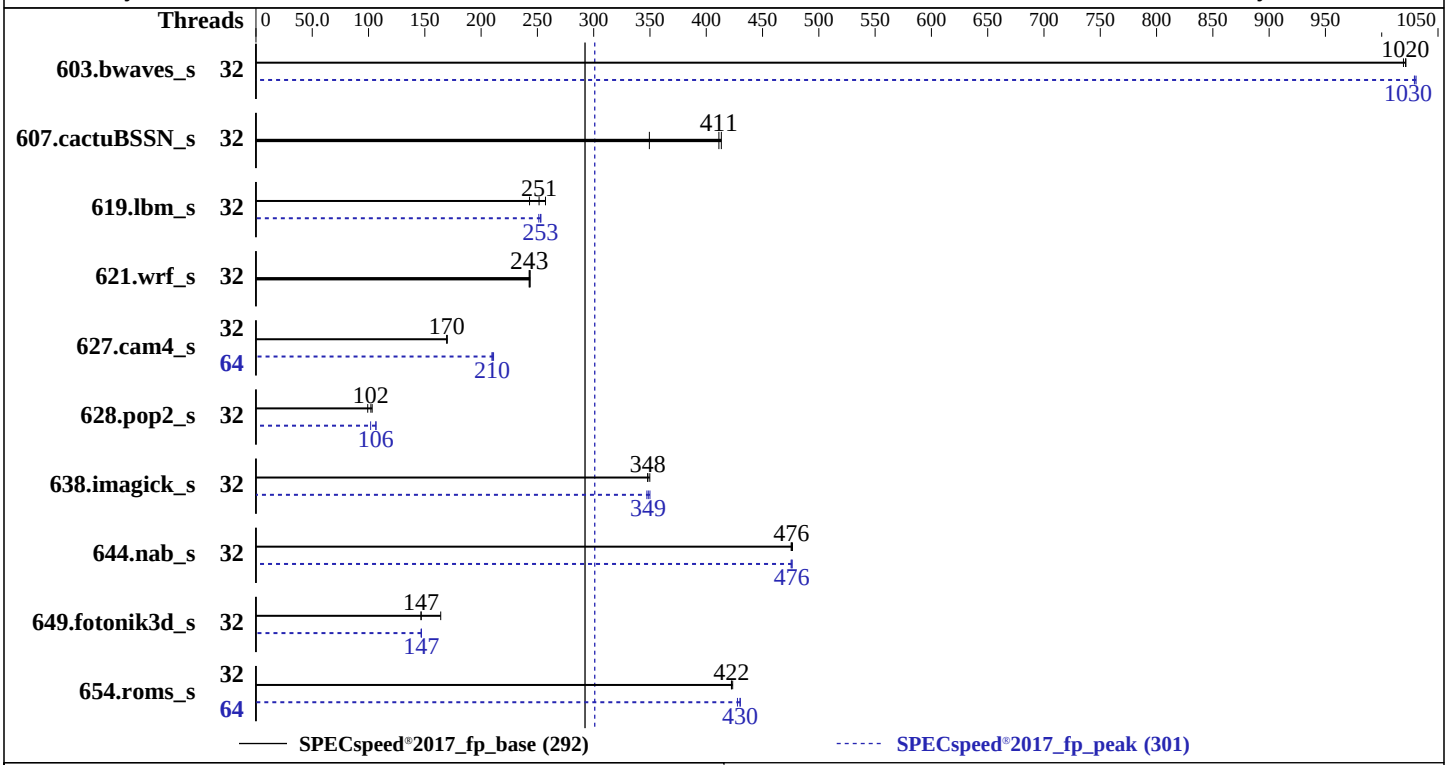


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 9355P |
| Max MHz: | 4400 |
| Nominal: | 3550 |
| Enabled: | 32 cores, 1 chip, 2 threads/core |
| Orderable: | 1 chip |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 256 MB I+D on chip per chip, 32 MB shared / 4 cores |
| Other: | None |
| Memory: | 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200) |
| Storage: | 1 x 1.8 TB NVME SSD |
| Other: | CPU Cooling: Air |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP6<br>Kernel 6.4.0-150600.21-default |
| Compiler: | C/C++/Fortran: Version 5.0.0 of AOCC |
| Parallel: | Yes |
| Firmware: | HPE BIOS Version v1.20 07/11/2025 released Jul-2025 |
| File System: | ext4 |
| System State: | Run level 5 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | None |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant Compute DL345 Gen12
(3.55 GHz, AMD EPYC 9355P)

SPECspeed®2017_fp_base = 292

SPECspeed®2017_fp_peak = 301

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Sep-2025
**Hardware Availability:** Aug-2025
**Software Availability:** Oct-2024

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 32 | 57.9 | 1020 | 57.8 | 1020 | **57.8** | **1020** | 32 | **57.3** | **1030** | 57.3 | 1030 | 57.2 | 1030 |
| 607.cactuBSSN_s | 32 | 47.7 | 349 | **40.5** | **411** | 40.3 | 413 | 32 | 47.7 | 349 | **40.5** | **411** | 40.3 | 413 |
| 619.lbm_s | 32 | 20.4 | 257 | 21.6 | 243 | **20.8** | **251** | 32 | 20.8 | 251 | 20.7 | 253 | **20.7** | **253** |
| 621.wrf_s | 32 | 54.3 | 244 | 54.5 | 243 | **54.5** | **243** | 32 | 54.3 | 244 | 54.5 | 243 | **54.5** | **243** |
| 627.cam4_s | 32 | 52.3 | 170 | 52.2 | 170 | **52.3** | **170** | 64 | 42.0 | 211 | **42.2** | **210** | 42.3 | 210 |
| 628.pop2_s | 32 | 115 | 103 | **116** | **102** | 120 | 99.3 | 32 | 111 | 107 | **112** | **106** | 117 | 102 |
| 638.imagick_s | 32 | 41.2 | 350 | **41.4** | **348** | 41.5 | 348 | 32 | **41.4** | **349** | 41.2 | 350 | 41.5 | 347 |
| 644.nab_s | 32 | 36.7 | 476 | 36.7 | 477 | **36.7** | **476** | 32 | 36.7 | 476 | 36.8 | 475 | **36.7** | **476** |
| 649.fotonik3d_s | 32 | 62.2 | 147 | 55.5 | 164 | **62.1** | **147** | 32 | 62.0 | 147 | **62.0** | **147** | 62.1 | 147 |
| 654.roms_s | 32 | **37.3** | **422** | 37.3 | 422 | 37.2 | 423 | 64 | 36.8 | 428 | **36.6** | **430** | 36.6 | 430 |

**SPECspeed®2017_fp_base = 292**

**SPECspeed®2017_fp_peak = 301**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-63"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
BIOS Configurations : Parameters are selected in the order shown below
Workload Profile set to General Peak Frequency Compute
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Memory Patrol Scrubbing set to Disabled
ACPI CST C2 Latency set to 18 microseconds
Last-Level Cache (LLC) as NUMA Node set to Enabled
NUMA memory domains per socket set to Four memory domains per socket
Thermal Configuration set to Enhanced CPU Cooling
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 Workload Profile set to Custom
  Power Regulator set to OS Control Mode

  Sysinfo program /home/cpu2017/bin/sysinfo
  Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
  running on r15-bm-02 Thu Sep  4 14:43:42 2025

  SUT (System Under Test) info as seen by some common utilities.

  ------------------------------------------------------------
  Table of contents
  ------------------------------------------------------------
   1. uname -a
   2. w
   3. Username
   4. ulimit -a
   5. sysinfo process ancestry
   6. /proc/cpuinfo
   7. lscpu
   8. numactl --hardware
   9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. sysctl
  16. /sys/kernel/mm/transparent_hugepage
  17. /sys/kernel/mm/transparent_hugepage/khugepaged
  18. OS release
  19. Disk information
  20. /sys/devices/virtual/dmi/id
  21. dmidecode
  22. BIOS
  ------------------------------------------------------------

  ------------------------------------------------------------
  1. uname -a
    Linux r15-bm-02 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
    x86_64 x86_64 x86_64 GNU/Linux

  ------------------------------------------------------------
  2. w
     14:43:42 up  3:42,  3 users,  load average: 6.55, 6.15, 3.75
    USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
    root     pts/1    10.28.68.136:S.0 12:08    2:35m  0.78s  0.08s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

  ------------------------------------------------------------
  3. Username
    From environment variable $USER:  root

  ------------------------------------------------------------
  4. ulimit -a
    core file size          (blocks, -c) unlimited
    data seg size           (kbytes, -d) unlimited
    scheduling priority             (-e) 0
    file size               (blocks, -f) unlimited
    pending signals                 (-i) 3094674
    max locked memory       (kbytes, -l) 2097152
    max memory size         (kbytes, -m) unlimited
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 3094674
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 screen -S cpu
 SCREEN -S cpu
 /bin/bash
 python3 ./run_intspeed.py
 /bin/bash ./amd_speed_aocc500_znver5_A1.sh
 runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
 runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.053/templogs/preenv.fpspeed.053.0.log --lognum 053.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9355P 32-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb002151
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 32
    siblings        : 64
    1 physical ids (chips)
    64 processors (hardware threads)
    physical id 0: core ids 0-31
    physical id 0: apicids 0-63
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               64
  On-line CPU(s) list:                  0-63
  Vendor ID:                            AuthenticAMD
  Model name:                           AMD EPYC 9355P 32-Core Processor
```

(Continued on next page)

## Platform Notes (Continued)

```
CPU family:                          26
Model:                               2
Thread(s) per core:                  2
Core(s) per socket:                  32
Socket(s):                           1
Stepping:                            1
Frequency boost:                     enabled
CPU(s) scaling MHz:                  101%
CPU max MHz:                         3550.0000
CPU min MHz:                         1500.0000
BogoMIPS:                            7099.79
Flags:                               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                     pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                     rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                     extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                     sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                     cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                     osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                     perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                     ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                     smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                     avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                     xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                     cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                     xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                     nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                     pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                     avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                     avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                     movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                     flush_l1d debug_swap
L1d cache:                           1.5 MiB (32 instances)
L1i cache:                           1 MiB (32 instances)
L2 cache:                            32 MiB (32 instances)
L3 cache:                            256 MiB (8 instances)
NUMA node(s):                        8
NUMA node0 CPU(s):                   0-3,32-35
NUMA node1 CPU(s):                   4-7,36-39
NUMA node2 CPU(s):                   8-11,40-43
NUMA node3 CPU(s):                   12-15,44-47
NUMA node4 CPU(s):                   16-19,48-51
NUMA node5 CPU(s):                   20-23,52-55
NUMA node6 CPU(s):                   24-27,56-59
NUMA node7 CPU(s):                   28-31,60-63
Vulnerability Gather data sampling:  Not affected
Vulnerability Itlb multihit:         Not affected
Vulnerability L1tf:                  Not affected
Vulnerability Mds:                   Not affected
Vulnerability Meltdown:              Not affected
Vulnerability Mmio stale data:       Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:              Not affected
Vulnerability Spec rstack overflow:  Not affected
Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                     always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:                 Not affected
Vulnerability Tsx async abort:       Not affected
```

**(Continued on next page)**

## Platform Notes (Continued)

```
From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     1.5M   12 Data            1    64        1             64
     L1i       32K       1M    8 Instruction     1    64        1             64
     L2         1M      32M   16 Unified         2  1024        1             64
     L3        32M     256M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-3,32-35
  node 0 size: 96449 MB
  node 0 free: 96118 MB
  node 1 cpus: 4-7,36-39
  node 1 size: 96727 MB
  node 1 free: 96497 MB
  node 2 cpus: 8-11,40-43
  node 2 size: 96765 MB
  node 2 free: 96448 MB
  node 3 cpus: 12-15,44-47
  node 3 size: 96765 MB
  node 3 free: 96544 MB
  node 4 cpus: 16-19,48-51
  node 4 size: 96765 MB
  node 4 free: 96471 MB
  node 5 cpus: 20-23,52-55
  node 5 size: 96765 MB
  node 5 free: 96438 MB
  node 6 cpus: 24-27,56-59
  node 6 size: 96765 MB
  node 6 free: 96130 MB
  node 7 cpus: 28-31,60-63
  node 7 size: 96694 MB
  node 7 free: 96261 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  11  12  12  12  12  12  12
    1:  11  10  12  12  12  12  12  12
    2:  12  12  10  11  12  12  12  12
    3:  12  12  11  10  12  12  12  12
    4:  12  12  12  12  10  11  12  12
    5:  12  12  12  12  11  10  12  12
    6:  12  12  12  12  12  12  10  11
    7:  12  12  12  12  12  12  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792267996 kB

------------------------------------------------------------
10. who -r
  run-level 5 Sep 4 11:01

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.27+suse.167.g130293e510)
  Default Target  Status
  graphical       running

------------------------------------------------------------
```

(Continued on next page)

## Platform Notes (Continued)

```
 12. Services, from systemctl list-unit-files
   STATE             UNIT FILES
   enabled           ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                     bluetooth chronyd cron display-manager getty@ irqbalance iscsi issue-generator kbdsettings
                     klog lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect oracle postfix
                     purge-kernels rollback rsyslog sapconf smartd sshd sysctl-logger systemd-pstore virtqemud
                     virtxend wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
                     xencommons
   enabled-runtime   systemd-fsck-root systemd-remount-fs
   disabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon amavis
                     apache2 apache2@ autofs autoyast-initscripts bgpd blk-availability bluetooth-mesh
                     boot-sysctl booth-arbitrator booth@ ca-certificates certmonger chrony-wait clamav-milter
                     clamd clamonacc console-getty corosync corosync-notifyd crm_mon ctdb cups cups-browsed
                     ddclient debug-shell dhcpd dhcpd6 dhcrelay dhcrelay6 dirsrv@ dlm dnsmasq drbd
                     drbd-lvchange@ drbd-wait-promotable@ ebtables exchange-bmc-os-info fetchmail firewalld
                     fsidd gpm grub2-once haveged hawk hwloc-dump-hwdata ipmi ipmievd ipvsadm iscsi-init iscsid
                     isisd issue-add-ssh-keys kexec-load ksm kvm_stat ldirectord libvirt-guests logd lunmask
                     lvmlockd lvmlocks man-db-create mariadb mariadb@ multipathd named nfs nfs-blkmap
                     nfs-server nfsserver nmb openvpn@ ospf6d ospfd ostree-remount pacemaker racoon
                     racoon-setkey radvd rarpd@ ripd ripngd rpcbind rpmconfigcheck rsyncd rtkit-daemon sanlock
                     sbd sbd_remote serial-getty@ smartd_generate_opts smb snmpd snmptrapd spamd spampd
                     speech-dispatcherd squid srp_daemon srp_daemon_port@ strongswan strongswan-starter
                     svnserve sysstat systemd-boot-check-no-failures systemd-confext systemd-network-generator
                     systemd-nspawn@ systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsd udisks2
                     update-system-flatpaks upower virtinterfaced virtlockd virtlogd virtnetworkd virtnodedevd
                     virtnwfilterd virtsecretd virtstoraged vncserver@ vsftpd wdmd winbind wpa_supplicant@
                     xen-dom0-modules xen-init-dom0 xen-qemu-dom0-disk-backend xen-watchdog xenconsoled
                     xendomains xenstored zebra
   indirect          pcscd saned@ systemd-userdbd tftp uuidd wickedd

 ------------------------------------------------------------
 13. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
   root=UUID=566b550a-b4e8-48d0-9bfc-e3063e24f965
   splash=silent
   mitigations=auto
   quiet
   security=apparmor

 ------------------------------------------------------------
 14. cpupower frequency-info
   analyzing CPU 27:
     current policy: frequency should be within 1.50 GHz and 3.55 GHz.
                     The governor "performance" may decide which speed to use
                     within this range.
     boost state support:
       Supported: yes
       Active: yes

 ------------------------------------------------------------
 15. sysctl
   kernel.numa_balancing                   0
   kernel.randomize_va_space               0
   vm.compaction_proactiveness            20
   vm.dirty_background_bytes       314572800
   vm.dirty_background_ratio               0
   vm.dirty_bytes                          0
   vm.dirty_expire_centisecs            3000
   vm.dirty_ratio                          8
   vm.dirty_writeback_centisecs          500
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  vm.dirtytime_expire_seconds         43200
  vm.extfrag_threshold                  500
  vm.min_unmapped_ratio                   1
  vm.nr_hugepages                         0
  vm.nr_hugepages_mempolicy               0
  vm.nr_overcommit_hugepages              0
  vm.swappiness                           1
  vm.watermark_boost_factor           15000
  vm.watermark_scale_factor              10
  vm.zone_reclaim_mode                    1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme1n1p3 ext4  1.8T   20G  1.7T   2% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        HPE ProLiant Compute DL345 Gen12
    Product Family: ProLiant
    Serial:         SANJACSCM

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    9x Hynix HMCG94AHBRA480N 64 GB 2 rank 6400, configured at 5200
    1x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400, configured at 5200
    2x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400, configured at 5200


------------------------------------------------------------
22. BIOS
```

(Continued on next page)

## Platform Notes (Continued)

```
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      1.20
    BIOS Date:         07/11/2025
    BIOS Revision:     1.20
    Firmware Revision: 1.16
```

## Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1377 2024_09_24)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.0.0/bin
--------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

## Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3

**(Continued on next page)**

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

## Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-return-type -Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

638.imagick_s: Same as 619.lbm_s

644.nab_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

**(Continued on next page)**

## Peak Optimization Flags (Continued)

603.bwaves_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -fscalar-transform -fvector-transform -mllvm -reduce-array-computations=3 -Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

649.fotonik3d_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -mllvm -reduce-array-computations=3 -Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

654.roms_s: `Same as 603.bwaves_s`

Benchmarks using both Fortran and C:

621.wrf_s: `basepeak = yes`

627.cam4_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining -fstruct-layout=9 -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt -Mrecursive -mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

628.pop2_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining -fstruct-layout=9 -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt -fscalar-transform -fvector-transform -Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

Benchmarks using Fortran, C, and C++:

**(Continued on next page)**

## Peak Optimization Flags (Continued)

607.cactuBSSN_s: `basepeak = yes`

## Peak Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-return-type -Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-return-type -Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.html`
`http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.7.xml`
`http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml`


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2017 v1.1.9 on 2025-09-04 15:43:41-0400.
Report generated on 2025-11-19 10:39:49 by CPU2017 PS formatter v6716.
Originally published on 2025-11-18.