SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Mainstream SuperServer SYS-622B-TRT
(X14DBI-T , Intel Xeon 6520P)

SPECspeed®2017_fp_base = 293

SPECspeed®2017_fp_peak = 293

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2025
Hardware Availability: Feb-2025
Software Availability: Jun-2024

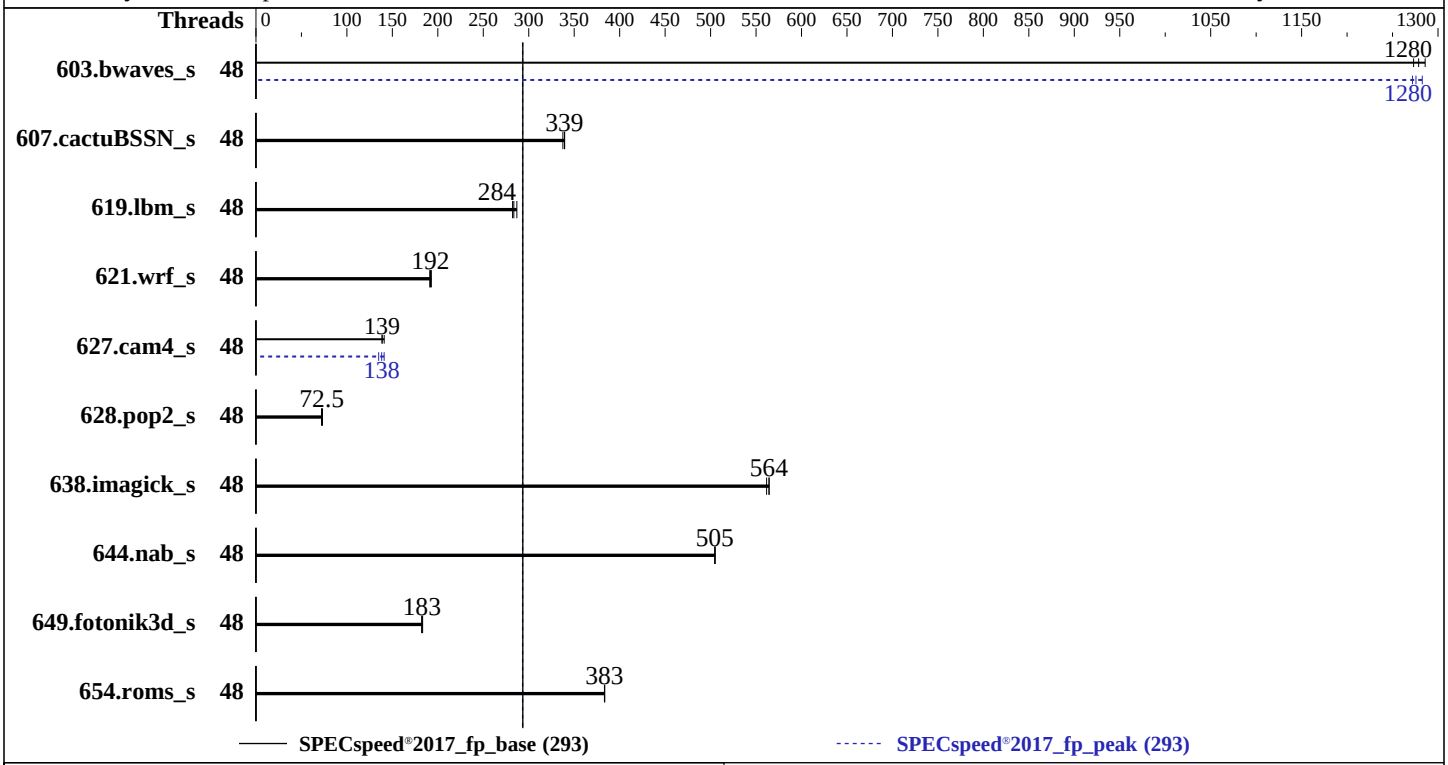

Hardware

CPU Name:	Intel Xeon 6520P
Max MHz:	4000
Nominal:	2400
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	64 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	144 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 2 TB SATA III HDD, 7200 RPM
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 Kernel 6.4.0-150600.21-default
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version 1.3 released Apr-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	**46.1**	**1280**	45.9	1290	46.3	1270	48	**46.2**	**1280**	46.0	1280	46.4	1270
607.cactuBSSN_s	48	**49.1**	**339**	49.1	340	49.4	338	48	**49.1**	**339**	49.1	340	49.4	338
619.lbm_s	48	18.6	282	18.3	287	**18.5**	**284**	48	18.6	282	18.3	287	**18.5**	**284**
621.wrf_s	48	69.2	191	68.6	193	**68.9**	**192**	48	69.2	191	68.6	193	**68.9**	**192**
627.cam4_s	48	62.8	141	**63.8**	**139**	63.9	139	48	**64.1**	**138**	65.7	135	62.9	141
628.pop2_s	48	165	72.1	162	73.2	**164**	**72.5**	48	165	72.1	162	73.2	**164**	**72.5**
638.imagick_s	48	**25.6**	**564**	25.6	564	25.7	562	48	**25.6**	**564**	25.6	564	25.7	562
644.nab_s	48	**34.6**	**505**	34.6	505	34.6	505	48	**34.6**	**505**	34.6	505	34.6	505
649.fotonik3d_s	48	**49.9**	**183**	50.0	182	49.7	183	48	**49.9**	**183**	50.0	182	49.7	183
654.roms_s	48	41.1	383	41.0	384	**41.1**	**383**	48	41.1	383	41.0	384	**41.1**	**383**

SPECspeed®2017_fp_base = **293**

SPECspeed®2017_fp_peak = **293**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
Workload Profile = HPC
Stale AtoS = Disable
LLC Dead Line Alloc = Disable
KTI Prefetch = Enable

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on sys-622b-trt-6520p Sat Jul 26 08:35:57 2025

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux sys-622b-trt-6520p 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024
  (36c1e09) x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   08:35:57 up 15:10,  1 user,  load average: 6.06, 6.02, 3.54
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                Fri17   15:07m  0.97s  0.01s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
```

(Continued on next page)

Platform Notes (Continued)

```
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 4126662
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 4126662
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2024.1-lin-core-avx512-speed-20240308.cfg --define cores=48 --tune base,peak -o all --define smt-on
   --define drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2024.1-lin-core-avx512-speed-20240308.cfg --define cores=48 --tune base,peak --output_format all
   --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
   --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6520P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x10003a5
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 24
    siblings        : 48
    2 physical ids (chips)
    96 processors (hardware threads)
    physical id 0: core ids 0-23
    physical id 1: core ids 0-23
    physical id 0: apicids 0-47
    physical id 1: apicids 128-175
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               96
```

(Continued on next page)

Platform Notes (Continued)

```
   On-line CPU(s) list:                  0-95
   Vendor ID:                            GenuineIntel
   BIOS Vendor ID:                       Intel(R) Corporation
   Model name:                           Intel(R) Xeon(R) 6520P
   BIOS Model name:                      Intel(R) Xeon(R) 6520P  CPU @ 2.8GHz
   BIOS CPU family:                      179
   CPU family:                           6
   Model:                                173
   Thread(s) per core:                   2
   Core(s) per socket:                   24
   Socket(s):                            2
   Stepping:                             1
   BogoMIPS:                             5600.00
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                         pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                         nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                         pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                         xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                         tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                         3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                         ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                         vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                                         rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                         clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                         xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                         split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                         arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                                         gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                                         la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                                         md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                                         amx_tile amx_int8 flush_l1d arch_capabilities
   Virtualization:                       VT-x
   L1d cache:                            2.3 MiB (48 instances)
   L1i cache:                            3 MiB (48 instances)
   L2 cache:                             96 MiB (48 instances)
   L3 cache:                             288 MiB (2 instances)
   NUMA node(s):                         2
   NUMA node0 CPU(s):                    0-23,48-71
   NUMA node1 CPU(s):                    24-47,72-95
   Vulnerability Gather data sampling:   Not affected
   Vulnerability Itlb multihit:          Not affected
   Vulnerability L1tf:                   Not affected
   Vulnerability Mds:                    Not affected
   Vulnerability Meltdown:               Not affected
   Vulnerability Mmio stale data:        Not affected
   Vulnerability Reg file data sampling: Not affected
   Vulnerability Retbleed:               Not affected
   Vulnerability Spec rstack overflow:   Not affected
   Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                         PBRSB-eIBRS Not affected; BHI BHI_DIS_S
   Vulnerability Srbds:                  Not affected
   Vulnerability Tsx async abort:        Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     2.3M   12 Data            1     64        1             64
      L1i       64K       3M   16 Instruction     1     64        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
     L2         2M      96M   16 Unified         2   2048        1             64
     L3       144M     288M   16 Unified         3 147456        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-23,48-71
  node 0 size: 515672 MB
  node 0 free: 478218 MB
  node 1 cpus: 24-47,72-95
  node 1 size: 516019 MB
  node 1 free: 488494 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056452532 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jul 25 17:25

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
                   issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
                   smartd sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                   wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                   kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                   serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd udisks2 vncserver@
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=991b623b-ca6e-4f40-9957-7ce11bf9a7cf
  splash=verbose
  mitigations=auto
  security=apparmor
  nomodeset

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 90:
```

(Continued on next page)

Platform Notes (Continued)

```
     Unable to determine current policy
     boost state support:
       Supported: yes
       Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     10
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sdc2      xfs   1.9T  112G  1.8T   7% /

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 21. /sys/devices/virtual/dmi/id
     Vendor:         Supermicro
     Product:        SYS-622B-TRT
     Product Family: Family
     Serial:         A945221X5100359

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x SK Hynix HMCG94AHBRA481N 64 GB 2 rank 6400


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      1.3
    BIOS Date:         04/08/2025
    BIOS Revision:     5.35
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
`-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Benchmarks using Fortran, C, and C++:
`-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Peak Compiler Invocation

C benchmarks:
`icx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `basepeak = yes`

644.nab_s: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

603.bwaves_s: `-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

649.fotonik3d_s: `basepeak = yes`

654.roms_s: `basepeak = yes`

Benchmarks using both Fortran and C:

621.wrf_s: `basepeak = yes`

627.cam4_s: `-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

628.pop2_s: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-GNR-revB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-GNR-revB.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-07-25 20:35:56-0400.
Report generated on 2025-11-19 10:40:57 by CPU2017 PS formatter v6716.
Originally published on 2025-11-18.