



SPEC® MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI ICE X
(Intel Xeon E5-2690 v3, 2.6 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 9.83

MPI2007 license: 14


Test sponsor: SGI

Tested by: SGI

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Apr-2014

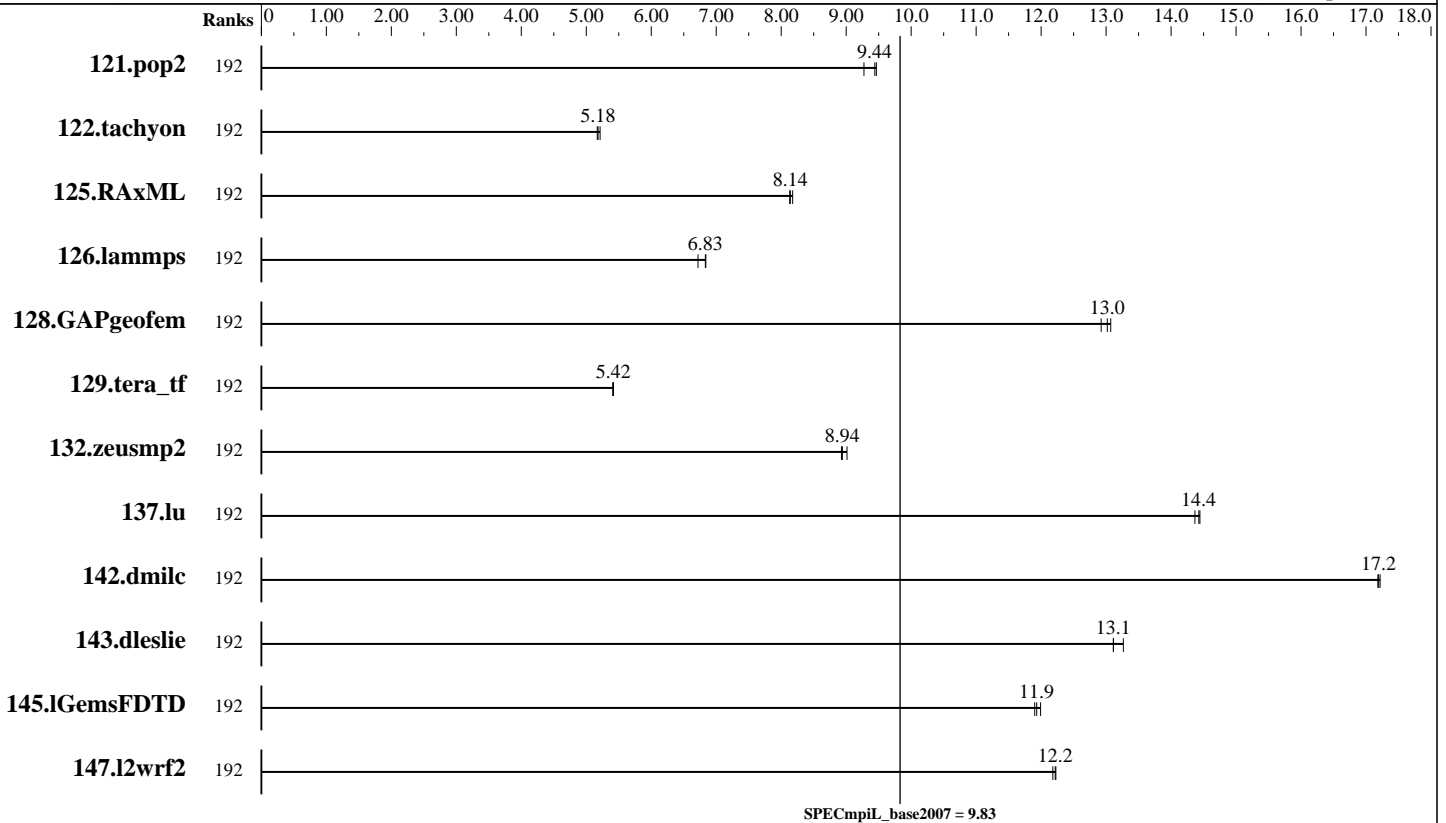

Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
121.pop2	192	420	9.27	411	9.46	<u>412</u>	<u>9.44</u>									
122.tachyon	192	376	5.17	373	5.21	<u>375</u>	<u>5.18</u>									
125.RAxML	192	357	8.18	<u>359</u>	<u>8.14</u>	359	8.13									
126.lammps	192	366	6.72	360	6.84	<u>360</u>	<u>6.83</u>									
128.GAPgeofem	192	<u>456</u>	<u>13.0</u>	459	12.9	454	13.1									
129.tera_tf	192	203	5.42	<u>203</u>	<u>5.42</u>	203	5.41									
132.zeusmp2	192	<u>237</u>	<u>8.94</u>	235	9.01	237	8.93									
137.lu	192	292	14.4	291	14.4	<u>291</u>	<u>14.4</u>									
142.dmilc	192	214	17.2	214	17.2	<u>214</u>	<u>17.2</u>									
143.dleslie	192	236	13.1	234	13.3	<u>236</u>	<u>13.1</u>									
145.lGemsFDTD	192	368	12.0	<u>370</u>	<u>11.9</u>	371	11.9									
147.l2wrf2	192	674	12.2	671	12.2	<u>672</u>	<u>12.2</u>									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SPECmpiL_peak2007 = Not Run

SGI ICE X
(Intel Xeon E5-2690 v3, 2.6 GHz)

SPECmpiL_base2007 = 9.83

MPI2007 license: 14

Test sponsor: SGI

Tested by: SGI

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Apr-2014

Hardware Summary

Software Summary

Type of System: Homogeneous
 Compute Node: SGI ICE X IP-131 Compute Node
 Interconnect: InfiniBand (MPI and I/O)
 File Server Node: SGI Rackable C1103-TY12
 Total Compute Nodes: 8
 Total Chips: 16
 Total Cores: 192
 Total Threads: 192
 Total Memory: 1 TB
 Base Ranks Run: 192
 Minimum Peak Ranks: --
 Maximum Peak Ranks: --

C Compiler: Intel C++ Composer XE 2013 for Linux, Version 14.0.3.174 Build 20140422
 C++ Compiler: Intel C++ Composer XE 2013 for Linux Version 14.0.3.174 Build 20140422
 Fortran Compiler: Intel Fortran Composer XE 2013 for Linux, Version 14.0.3.174 Build 20140422
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 MPI Library: SGI MPT 2.09 Patch 11049
 Other MPI Info: OFED 1.5.4
 Pre-processors: None
 Other Software: None

Node Description: SGI ICE X IP-131 Compute Node

Hardware

Software

Number of nodes: 8
 Uses of the node: compute
 Vendor: SGI
 Model: SGI ICE X (Intel Xeon E5-2690 v3, 2.6 GHz)
 CPU Name: Intel Xeon E5-2690 v3
 CPU(s) orderable: 1-2 chips
 Chips enabled: 2
 Cores enabled: 24
 Cores per chip: 12
 Threads per core: 1
 CPU Characteristics: 12 Core, 2.60 GHz, 9.6 GT/s QPI
 Intel Turbo Boost Technology up to 3.50 GHz
 Hyper-Threading Technology disabled
 CPU MHz: 2600
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-17000R-15, ECC)
 Disk Subsystem: None
 Other Hardware: None
 Adapter: Mellanox MT27500 with ConnectX-3 ASIC (PCIe x8 Gen3 8 GT/s)
 Number of Adapters: 2
 Slot Type: PCIe x8 Gen3
 Data Rate: InfiniBand 4x FDR
 Ports Used: 2
 Interconnect Type: InfiniBand

Adapter: Mellanox MT27500 with ConnectX-3 ASIC (PCIe x8 Gen3 8 GT/s)
 Adapter Driver: OFED-1.5.4
 Adapter Firmware: 2.30.3000
 Operating System: SUSE Linux Enterprise Server 11 SP3 (x86_64), Kernel 3.0.93-0.8-default
 Local File System: NFSv3
 Shared File System: NFSv3 IPoIB
 System State: Multi-user, run level 3
 Other Software: SGI Tempo Service Node 2.8.1, Build 709rp49.sles11sp3-1402182002



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI ICE X
(Intel Xeon E5-2690 v3, 2.6 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 9.83

MPI2007 license: 14
Test sponsor: SGI
Tested by: SGI

Test date: Jul-2014
Hardware Availability: Sep-2014
Software Availability: Apr-2014

Node Description: SGI Rackable C1103-TY12

Hardware

Number of nodes: 1
Uses of the node: fileserver
Vendor: SGI
Model: SGI Rackable C1103-TY12 (Intel Xeon X5670, 2.93 GHz)
CPU Name: Intel Xeon X5670
CPU(s) orderable: 1-2 chips
Chips enabled: 2
Cores enabled: 12
Cores per chip: 6
Threads per core: 2
CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
Hyper-Threading Technology enabled
CPU MHz: 2933
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per chip
L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 * 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 12 TB RAID 6
12 x 1 TB SATA (Seagate Constellation, 7200RPM)
Other Hardware: None
Adapter: Mellanox MT27500 with ConnectX-3 ASIC (PCIe x8 Gen3 8 GT/s)
Number of Adapters: 2
Slot Type: PCIe x8 Gen3
Data Rate: InfiniBand 4x FDR
Ports Used: 2
Interconnect Type: InfiniBand

Software

Adapter: Mellanox MT27500 with ConnectX-3 ASIC (PCIe x8 Gen3 8 GT/s)
Adapter Driver: OFED-1.5.2
Adapter Firmware: 2.30.3000
Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.46-0.3-default
Local File System: xfs
Shared File System: --
System State: Multi-user, run level 3
Other Software: SGI Foundation Software 2.5, Build 705r10.sles11-1110192111

Interconnect Description: InfiniBand (MPI and I/O)

Hardware

Vendor: Mellanox Technologies and SGI
Model: None
Switch Model: SGI FDR Integrated IB Switch Blade 2SW9x27 with Mellanox SwitchX device 51000
Number of Switches: 2
Number of Ports: 36
Data Rate: InfiniBand 4x FDR
Firmware: 09.02.3000
Topology: Enhanced Hypercube
Primary Use: MPI and I/O traffic

Software



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI ICE X
(Intel Xeon E5-2690 v3, 2.6 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 9.83

MPI2007 license: 14

Test sponsor: SGI

Tested by: SGI

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Apr-2014

Submit Notes

The config file option 'submit' was used.

General Notes

Software environment:

```
export MPI_REQUEST_MAX=65536
export MPI_TYPE_MAX=32768
export MPI_IB_RAILS=2
ulimit -s unlimited
```

BIOS settings:

```
AMI BIOS version DY2E6044
Hyper-Threading Technology disabled
Intel Turbo Boost Technology enabled (default)
Intel Turbo Boost Technology activated with
  modprobe acpi_cpufreq
  cpupower frequency-set -u 2601MHz -d 2601MHz -g performance
```

Job Placement:

Each MPI job was assigned to a topologically compact set of nodes, i.e. the minimal needed number of switches was used for each job: 2 switches for up to 192 ranks, 4 switches for up to 384 ranks, 8 switches for 768 ranks, and 16 switches for 1536 ranks.

Additional notes regarding interconnect:

The Infiniband network consists of two independent planes, with half the switches in the system allocated to each plane. I/O traffic is restricted to one plane, while MPI traffic can use both planes.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

126.lammps: icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI ICE X
(Intel Xeon E5-2690 v3, 2.6 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 9.83

MPI2007 license: 14

Test sponsor: SGI

Tested by: SGI

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Apr-2014

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG

Base Optimization Flags

C benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xCORE-AVX2 -no-prec-div -ansi-alias

Fortran benchmarks:

-O3 -xCORE-AVX2 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xCORE-AVX2 -no-prec-div

Base Other Flags

C benchmarks:

-lmpi

C++ benchmarks:

126.lammps: -lmpi

Fortran benchmarks:

-lmpi

Benchmarks using both Fortran and C:

-lmpi

The flags file that was used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel14_flags.20140908.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/mpi2007/flags/SGI_x86_64_Intel14_flags.20140908.xml



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

SGI

SGI ICE X
(Intel Xeon E5-2690 v3, 2.6 GHz)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 9.83

MPI2007 license: 14

Test sponsor: SGI

Tested by: SGI

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Apr-2014

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.
Report generated on Mon Sep 8 13:45:45 2014 by SPEC MPI2007 PS/PDF formatter v1463.
Originally published on 8 September 2014.