



SPEC® MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon E7-4890 v2, 2.80 GHz,
DDR3-1600 MHz, SMT on, Turbo off)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 17.7

MPI2007 license: 13


Test sponsor: Intel Corporation

Tested by: Pavel Shelepuhin

Test date: Feb-2014

Hardware Availability: Feb-2014

Software Availability: Dec-2013

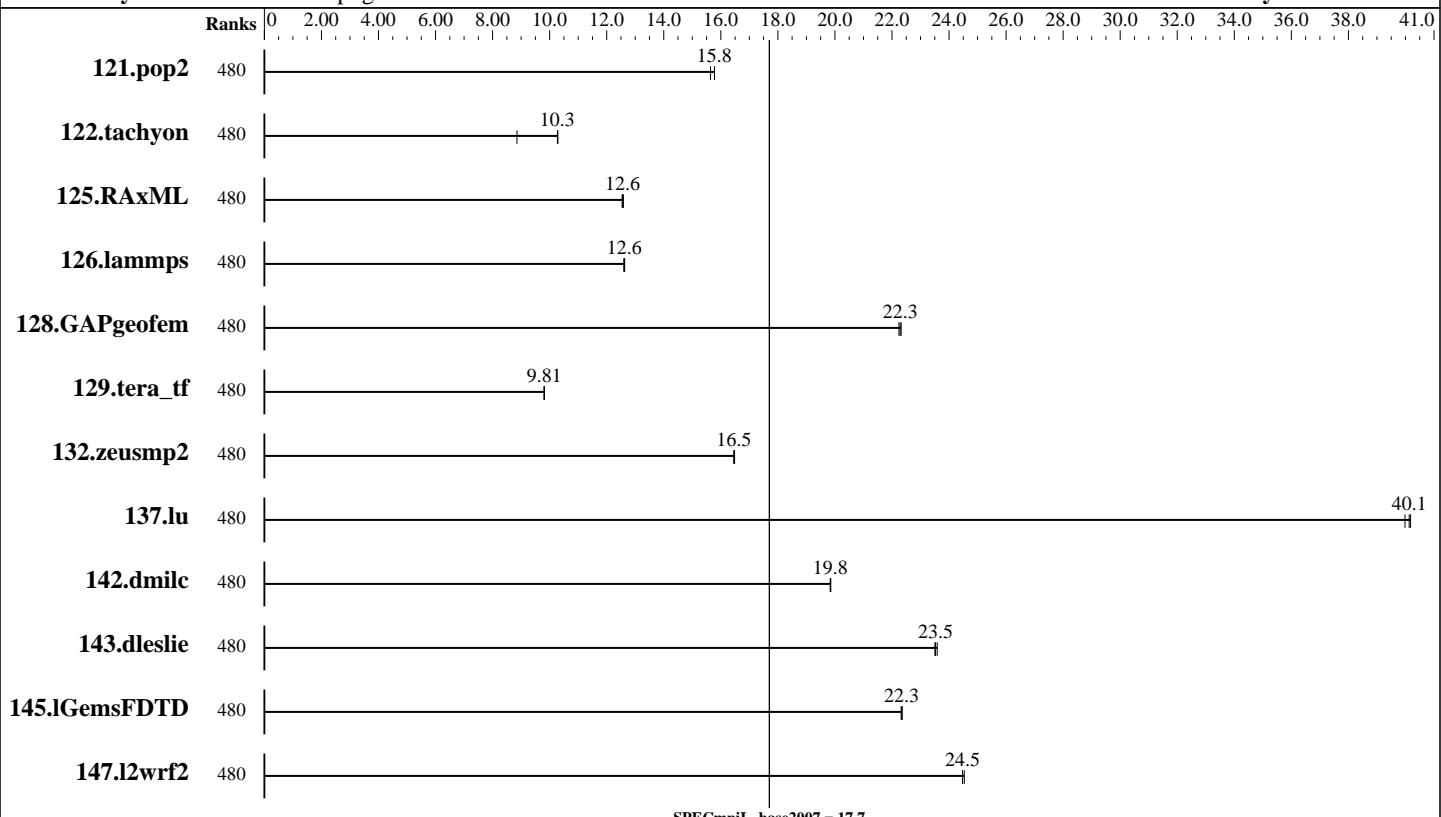

Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
121.pop2	480	249	15.6	247	15.8	247	15.8									
122.tachyon	480	220	8.85	189	10.3	189	10.3									
125.RAxML	480	232	12.6	232	12.6	233	12.5									
126.lammps	480	195	12.6	195	12.6	195	12.6									
128.GAPgeofem	480	266	22.3	267	22.2	266	22.3									
129.tera_tf	480	112	9.81	112	9.80	112	9.82									
132.zeusmp2	480	129	16.5	129	16.5	129	16.5									
137.lu	480	105	40.0	105	40.1	105	40.2									
142.dmilc	480	186	19.9	186	19.8	186	19.8									
143.dleslie	480	132	23.5	131	23.6	132	23.5									
145.lGemsFDTD	480	197	22.4	197	22.3	198	22.3									
147.l2wrf2	480	334	24.5	335	24.5	335	24.5									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 1



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon E7-4890 v2, 2.80 GHz,
DDR3-1600 MHz, SMT on, Turbo off)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 17.7

MPI2007 license: 13

Test date: Feb-2014

Test sponsor: Intel Corporation

Hardware Availability: Feb-2014

Tested by: Pavel Shelepuhin

Software Availability: Dec-2013

Hardware Summary

Type of System:	Homogeneous
Compute Node:	Endeavor Node
Interconnects:	IB Switch Gigabit Ethernet
File Server Node:	NFS
Total Compute Nodes:	8
Total Chips:	32
Total Cores:	480
Total Threads:	960
Total Memory:	4 TB
Base Ranks Run:	480
Minimum Peak Ranks:	--
Maximum Peak Ranks:	--

Software Summary

C Compiler:	Intel C++ Composer XE 2013 for Linux, Version 14.0.0.080 Build 20130728
C++ Compiler:	Intel C++ Composer XE 2013 for Linux, Version 14.0.0.080 Build 20130728
Fortran Compiler:	Intel Fortran Composer XE 2013 for Linux, Version 14.0.0.080 Build 20130728
Base Pointers:	64-bit
Peak Pointers:	64-bit
MPI Library:	Intel MPI Library 4.1.3.045 for Linux
Other MPI Info:	None
Pre-processors:	No
Other Software:	None

Node Description: Endeavor Node

Hardware

Number of nodes:	8
Uses of the node:	compute
Vendor:	Intel
Model:	S4TR1SY4Q
CPU Name:	Intel Xeon E7-4890 v2
CPU(s) orderable:	1-4 chips
Chips enabled:	4
Cores enabled:	60
Cores per chip:	15
Threads per core:	2
CPU Characteristics:	Intel Turbo Boost Technology disabled, 8.0 GT/s QPI, Hyper-Threading enabled
CPU MHz:	2800
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	38400 KB I+D on chip per chip, 38400 KB shared / 15 cores
Other Cache:	None
Memory:	512 GB (32 x 16 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	2 x 300 GB SAS HDDs
Other Hardware:	None
Adapter:	Intel (ESB2) 82575EB Dual-Port Gigabit Ethernet Controller
Number of Adapters:	1
Slot Type:	PCI-Express x8
Data Rate:	1Gbps Ethernet
Ports Used:	2
Interconnect Type:	Ethernet
Adapter:	Mellanox MCX353A-FCAT ConnectX-3
Number of Adapters:	1
Slot Type:	PCIe x8 Gen3
Data Rate:	InfiniBand 4x FDR
Ports Used:	1
Interconnect Type:	InfiniBand

Software

Adapter:	Intel (ESB2) 82575EB Dual-Port Gigabit Ethernet Controller
Adapter Driver:	e1000
Adapter Firmware:	None
Adapter:	Mellanox MCX353A-FCAT ConnectX-3
Adapter Driver:	OFED 1.5.3.1
Adapter Firmware:	2.10.0
Operating System:	Red Hat EL 6.4, kernel 2.6.32-358
Local File System:	Linux/ext2
Shared File System:	NFS
System State:	Multi-User
Other Software:	Platform LSF 9.1.1.1



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon E7-4890 v2, 2.80 GHz,
DDR3-1600 MHz, SMT on, Turbo off)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 17.7

MPI2007 license: 13

Test date: Feb-2014

Test sponsor: Intel Corporation

Hardware Availability: Feb-2014

Tested by: Pavel Shelepuhin

Software Availability: Dec-2013

Node Description: NFS

Hardware		Software
Number of nodes:	1	Adapter: Intel 82563GB Dual-Port Gigabit
Uses of the node:	fileserver	Ethernet Controller
Vendor:	Intel	Adapter Driver: e1000e
Model:	S7000FC4UR	Adapter Firmware: N/A
CPU Name:	Intel Xeon CPU	Operating System: RedHat EL 5 Update 4
CPU(s) orderable:	1-4 chips	Local File System: None
Chips enabled:	4	Shared File System: NFS
Cores enabled:	16	System State: Multi-User
Cores per chip:	4	Other Software: None
Threads per core:	2	
CPU Characteristics:	--	
CPU MHz:	2926	
Primary Cache:	32 KB I + 32 KB D on chip per core	
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores	
L3 Cache:	None	
Other Cache:	None	
Memory:	64 GB	
Disk Subsystem:	8 disks, 500GB/disk, 2.7TB total	
Other Hardware:	None	
Adapter:	Intel 82563GB Dual-Port Gigabit Ethernet Controller	
Number of Adapters:	1	
Slot Type:	PCI-Express x8	
Data Rate:	1Gbps Ethernet	
Ports Used:	1	
Interconnect Type:	Ethernet	

Interconnect Description: IB Switch

Hardware		Software
Vendor:	Mellanox	
Model:	Mellanox MSX6025F-1BFR	
Switch Model:	Mellanox MSX6025F-1BFR	
Number of Switches:	46	
Number of Ports:	36	
Data Rate:	InfiniBand 4x FDR	
Firmware:	7.2.0	
Topology:	Fat tree	
Primary Use:	MPI traffic	



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon E7-4890 v2, 2.80 GHz,
DDR3-1600 MHz, SMT on, Turbo off)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 17.7

MPI2007 license: 13

Test date: Feb-2014

Test sponsor: Intel Corporation

Hardware Availability: Feb-2014

Tested by: Pavel Shelepuhin

Software Availability: Dec-2013

Interconnect Description: Gigabit Ethernet

Hardware

Vendor: Force10 Networks
Model: Force10 S50, Force10 C300
Switch Model: Force10 S50, Force10 C300
Number of Switches: 15
Number of Ports: 48
Data Rate: 1Gbps Ethernet, 10Gbps Ethernet
Firmware: 8.2.1.0
Topology: Fat tree
Primary Use: Cluster File System

Software

Submit Notes

The config file option 'submit' was used.

General Notes

MPI startup command:

mpieexec.hydra command was used to start MPI jobs.

BIOS settings:

Intel Hyper-Threading Technology (SMT): Enabled (default is Enabled)
Intel Turbo Boost Technology (Turbo) : Disabled (default is Enabled)

RAM configuration:

Compute nodes have 4x16-GB RDIMM on each memory channel.

Network:

Forty six 36-port switches: 18 core switches and 28 leaf switches.
Each leaf has one link to each core. Remaining 18 ports on 25 of 28 leafs
are used for compute nodes. On the remaining 3 leafs the ports are used
for FS nodes and other peripherals.

Job placement:

Each MPI job was assigned to a topologically compact set of nodes, i.e.
the minimal needed number of leaf switches was used for each job: 1 switch
for 60/120/240/480 ranks.

Platform LSF was used for job submission. It has no impact on performance.
Information can be found at: <http://www.platform.com>

Base Compiler Invocation

C benchmarks:
mpiicc

Continued on next page



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon E7-4890 v2, 2.80 GHz,
DDR3-1600 MHz, SMT on, Turbo off)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 17.7

MPI2007 license: 13

Test date: Feb-2014

Test sponsor: Intel Corporation

Hardware Availability: Feb-2014

Tested by: Pavel Shelepuhin

Software Availability: Dec-2013

Base Compiler Invocation (Continued)

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:

mpiifort

Benchmarks using both Fortran and C:

mpiicc mpiifort

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG

126.lammps: -DMPICH_IGNORE_CXX_SEEK

Base Optimization Flags

C benchmarks:

-O3 -xCORE-AVX-I -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xCORE-AVX-I -no-prec-div

Fortran benchmarks:

-O3 -xCORE-AVX-I -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xCORE-AVX-I -no-prec-div

The flags file that was used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/EM64T_Intel140_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/mpi2007/flags/EM64T_Intel140_flags.xml



SPEC MPIL2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon E7-4890 v2, 2.80 GHz,
DDR3-1600 MHz, SMT on, Turbo off)

SPECmpiL_peak2007 = Not Run

SPECmpiL_base2007 = 17.7

MPI2007 license: 13

Test date: Feb-2014

Test sponsor: Intel Corporation

Hardware Availability: Feb-2014

Tested by: Pavel Shelepuhin

Software Availability: Dec-2013

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.

Report generated on Tue Jul 22 13:47:44 2014 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 5 March 2014.