




# CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company  
HP 9000 rp8420-32 (1000MHz PA-8800, 4 cells)

SPECfp\_rate2000 = 110  
SPECfp\_rate\_base2000 = 102

SPEC license #: 3 Tested by: HP Richardson Test date: Jan-2004 Hardware Avail: Feb-2004 Software Avail: Feb-2004

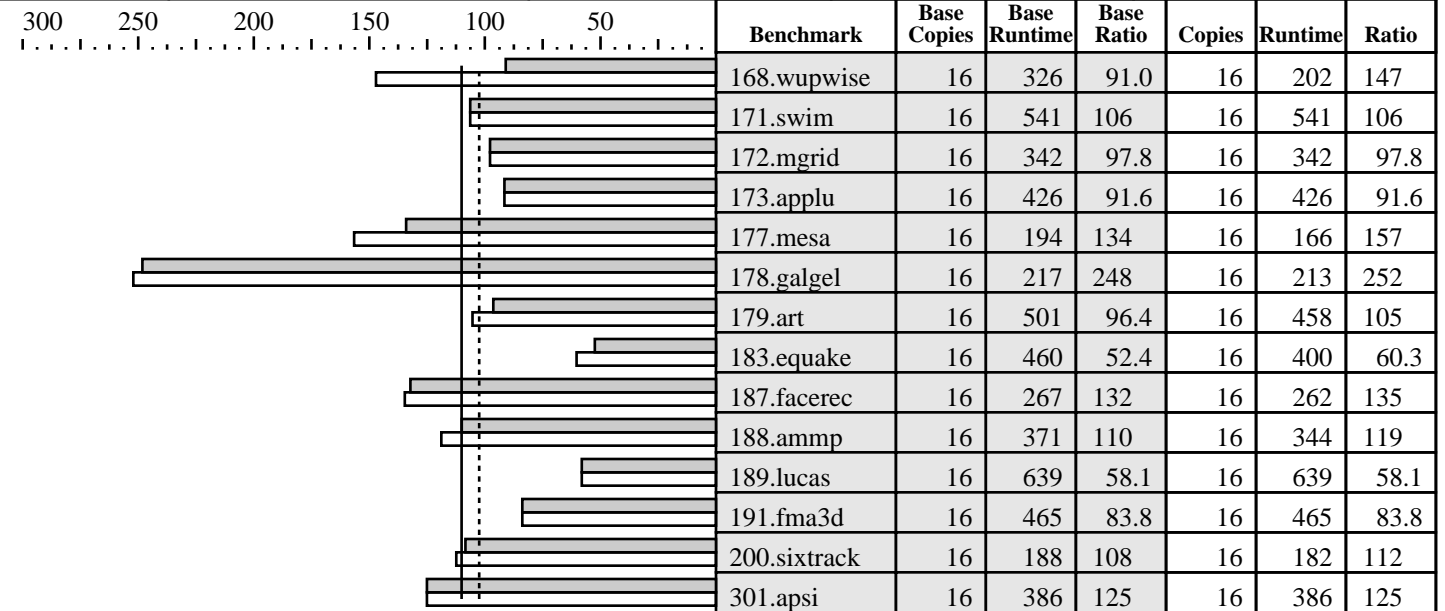

### Hardware

CPU: PA-8800  
 CPU MHz: 1000  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 8 chips, 2 cores/chip  
 CPU(s) orderable: 4,8,12,16,20,24,28,32 (order by # cores)  
 Parallel: no  
 Primary Cache: 0.75MBI + 0.75MBD (on chip) per core  
 Secondary Cache: 32MB (off chip) shared by 2 cores  
 L3 Cache: N/A  
 Other Cache: N/A  
 Memory: 32GB (64 \* 512MB DIMMs)  
 Disk Subsystem: 10x36GB 10K rpm SCSI (striped)  
 Other Hardware: N/A

### Software

Operating System: HPUX11i-TCOE B.11.11.0312  
 Compiler: HP C/ANSI C B.11.11.08  
 HP Fortran90 Compiler B.11.01.74  
 File System: OnLineJFS  
 System State: Multi-user

## Notes/Tuning Information

#### Portability flags:

178.galgel: +source=fixed

#### Baseline compile flags:

Fortran: +Ofaster -Wl,-a,archive  
 C : +I/+P +Oall +Odataprefetch -Wl,-a,archive

#### Peak compile flags:

168.wupwise: (ONESTEP) +cat +Ofaster -Wl,-a,archive  
 171.swim: basepeak=true  
 172.mgrid: basepeak=true  
 173.applu: basepeak=true  
 177.mesa: +I/+P +O4 +Odataprefetch -Wl,-a,archive  
 178.galgel: +Ofaster +Oloop\_unroll=6 -Wl,-a,archive  
 179.art: +I/+P +Oall +Optrs\_strongly\_typed +Opromote\_indirect\_calls -Wl,-a,archive  
 183.equake: +O4 +Olibcalls +Odataprefetch +Optrs\_strongly\_typed



# CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company  
HP 9000 rp8420-32 (1000MHz PA-8800, 4 cells)

SPECfp\_rate2000 = 110  
SPECfp\_rate\_base2000 = 102

SPEC license #: 3 | Tested by: HP Richardson | Test date: Jan-2004 | Hardware Avail: Feb-2004 | Software Avail: Feb-2004

## Notes/Tuning Information (Continued)

```

+Opromote_indirect_calls -Wl,+FPD -Wl,-a,archive
187.facerec: (ONESTEP) +cat +Ofaster +Ofastaccess -Wl,-a,archive
188.ammp: +I/+P +Oall +Odataprefetch +Optrs_strongly_typed
+Opromote_indirect_calls -Wl,-a,archive
189.lucas: basepeak=true
191.fma3d: basepeak=true
200.sixtrack: (ONESTEP) +cat +O3 +Onolibcalls +Onolimit +Onoinline
+Odataprefetch -Wl,+FPD -Wl,-a,archive
301.apsi: basepeak=true

```

### Kernel Tunables:

```

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608
maxdsiz_64bit=4396972761584
maxssiz_64bit=1073741824
vps_pagesize=4096
vps_ceiling=16384

```

### Other notes:

The system under test had the HP-UX 11i v1 December 2003 Technical Computing Operating Environment (version 11.11.0312) and DART63 (December 2003) compilers installed, with the following patches applied:

```

GOLDAPPS11i Gold Applications Patches for HP-UX 11i v1, December 2003
GOLDBASE11i Gold Base Patches for HP-UX 11i v1, December 2003
HWEnable11i Hardware Enablement Patches for HP-UX 11i v1, December 2003
HWETEST1111 Hardware Enablement Patches for PA-8800 (prerelease)
PHSS_29483 aC++ compiler cumulative patch (A.03.52)
PHSS_30002 Fortran90 cumulative patch (B.11.01.74)

```

System was configured with all memory interleaved

System configured as a single partition with 4 cells and 2 PA-8800 modules (each with 2 processors) per cell (unused processors deconfigured with firmware command "cpuconfig <cell> <cpu> off" prior to booting)

Filesystem used for spec runs mounted "tmplog"