




CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E25K (48 processor)

SPECint_rate2000 = 988
SPECint_rate_base2000 = 818

SPEC license #: 6 Tested by: Sun Microsystems Test date: Dec-2005 Hardware Avail: Oct-2005 Software Avail: Nov-2005

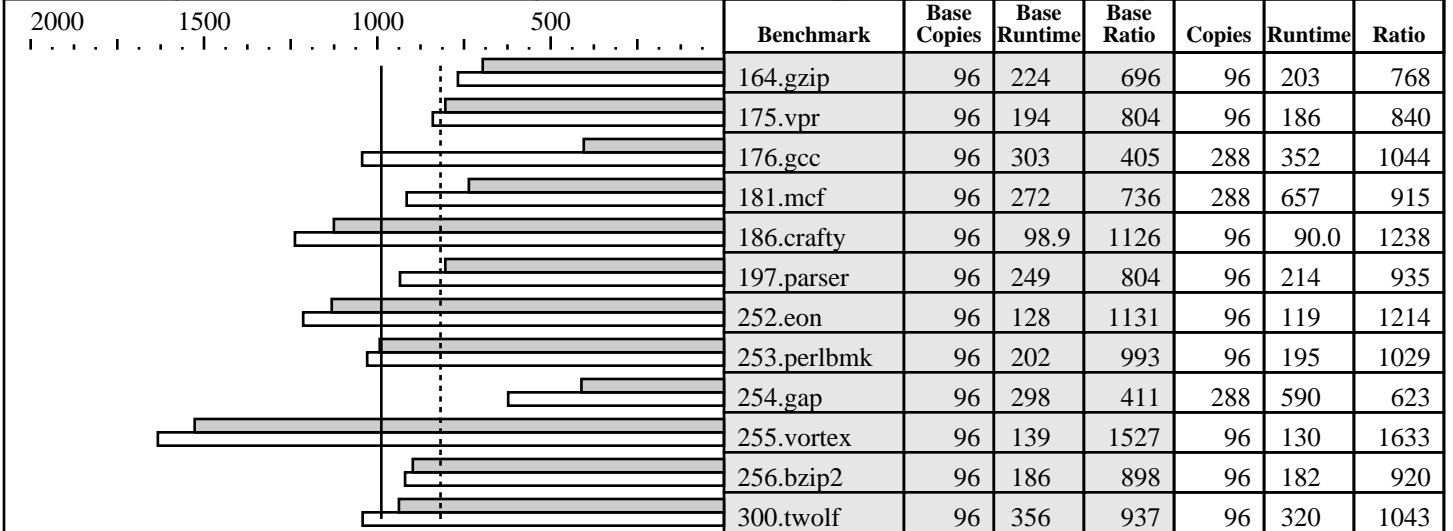

Hardware

CPU: UltraSPARC IV+
 CPU MHz: 1500
 FPU: Integrated
 CPU(s) enabled: 96 cores, 48 chips, 2 cores/chip
 CPU(s) orderable: 4-72 (order by number of chips, groups of 4)
 Parallel: No
 Primary Cache: 64KBI+64KBD per core on chip (128KBI+128KBD on chip)
 Secondary Cache: 2MB(I+D) per chip (on chip)
 L3 Cache: 32MB(I+D) per chip (off chip)
 Other Cache: None
 Memory: 192GB 16-way interleaved
 Disk Subsystem: Sun StorEdge D240 Media Tray (2x73GB)
 Sun StorEdge 6120 Array (14x73GB)
 Other Hardware: None

Software

Operating System: Solaris 10
 Compiler: Sun Studio 11
 File System: ufs (default ufs logging on with Solaris 10)
 System State: Multi-User

Notes/Tuning Information

Compiler invocation:

C: cc
CXX: CC

Integer base flags:

-fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:

ONESTEP=yes for all benchmarks
Profile feedback used for those marked with +FDO

164.zip: -x04 -xbuiltin=%all -xtarget=native -xalias_level=std
 -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=30,
 -Qeps:do_spec_load=1 +FDO
 175.vpr: -fast -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1,
 -Qeps:rp_filtering_margin=30 -xipo=2 -xpagesize_stack=8K
 -lmopt -lm +FDO



CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E25K (48 processor)

SPECint_rate2000 = 988
SPECint_rate_base2000 = 818

SPEC license #: 6 Tested by: Sun Microsystems Test date: Dec-2005 Hardware Avail: Oct-2005 Software Avail: Nov-2005

Notes/Tuning Information (Continued)

```

176.gcc: -fast -xipo=2 -Wc,-Qicache-chbab=1 -Wc,-Qeps:enabled=1
        -Qeps:ws=32 -Wc,-Qdepgraph-early_cross_call=1
        -Wc,-Qms_pipe-pref_prolog -ll2amm +FDO
181.mcf: -fast -xipo=2 -xprefetch_level=2
186.crafty: -fast -xpagesize=8k -xipo=2 -xalias_level=strong
        -W2,-Ashort_ldst -xinline= -xprefetch -xrestrict
        +FDO (-xlinkopt during pass2)
197.parser: -fast -xipo=2 -xalias_level=strong -Wc,Qgsched-T6
        -Wc,-Qipa:valueprediction -Wc,-Qms_pipe-prefstrong=0,
        -Qlp-pt=weak +FDO
252.eon: -fast -xipo=2 -xalias_level=compatible -Qoption cg
        -Qeps:enabled=1 -xvector -Qoption iropt -Abcopy -xunroll=16
        +FDO
253.perlbnk: -fast -xipo -Wc,-Qeps:enabled=1,-Qeps:ws=16 -xalias_level=std
        -xsafe=mem -Wc,-Qiselect-funcalign=128,-Qicache-chbab=1
        -Wc,-Qiselect-sw_pf_tbl_th=40,-Qeps:do_spec_load=1 +FDO
254.gap: -fast -W2,-Abcopy -xvector -xprefetch_level=3 +FDO
255.vortex: -fast -xrestrict -xipo=2 -Wc,-Qeps:enabled=1
        -W2,-Ainline:recursion=1:cs=400:irs=5000
        -Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=64
        -Wc,-Qpeep-Sh0 -W2,-crit -xprefetch=latx:1.7 -fsimple=1
        -Wc,-Qiselect-sw_pf_tbl_th=30 -Wc,-Qicache-chbab=1
        -W2,-Ainline:inc=300 -ll2amm +FDO
256.bzip2: -fast -xipo=2 -xalias_level=strong -xrestrict
        -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1 +FDO
300.twolf: -fast -xalias_level=strong -xsafe=mem -xipo=2
        -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp -xinline= +FDO

```

Feedback is done as follows, unless otherwise noted:

```

fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
PASS1:    -xprofile=collect:./feedback
PASS2:    -xprofile=use:./feedback

```

Portability:

```

176.gcc:  -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
186.crafty: -DSUN
252.eon:  -DFMAX_IS_DOUBLE -library=iostream
253.perlbnk: -DSPEC_CPU2000_SOLARIS
254.gap:  -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
        -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

```

Shell Environments:

```

Stack size set to unlimited via "ulimit -s unlimited"
MPSSHEAP=4M
MPSSSTACK=4M
LD_PRELOAD=mpss.so.1

```

Kernel Parameters (/etc/system):

```

autoup=900
tune_t_fsflushr=1

```

The system was configured with multiple file systems.
The O/S was installed on one disk of the Sun StorEdge D240
Media Tray (ufs, ufs w/logging). The benchmark was run on
the Sun StorEdge 6120 Array, using H/W Raid 5 and ufs with
ufs logging file system.



CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E25K (48 processor)

SPECint_rate2000 = 988

SPECint_rate_base2000 = 818

SPEC license #: 6 Tested by: Sun Microsystems Test date: Dec-2005 Hardware Avail: Oct-2005 Software Avail: Nov-2005

Notes/Tuning Information (Continued)