



# CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation


## IBM Corporation

IBM System X 3500 (1.6 GHz Xeon E5310, 8MB L2 Cache)

SPECfp\_rate2000 = --

SPECfp\_rate\_base2000 = 75.1

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Oct-2006 | Hardware Avail: Dec-2006 | Software Avail: Mar-2006

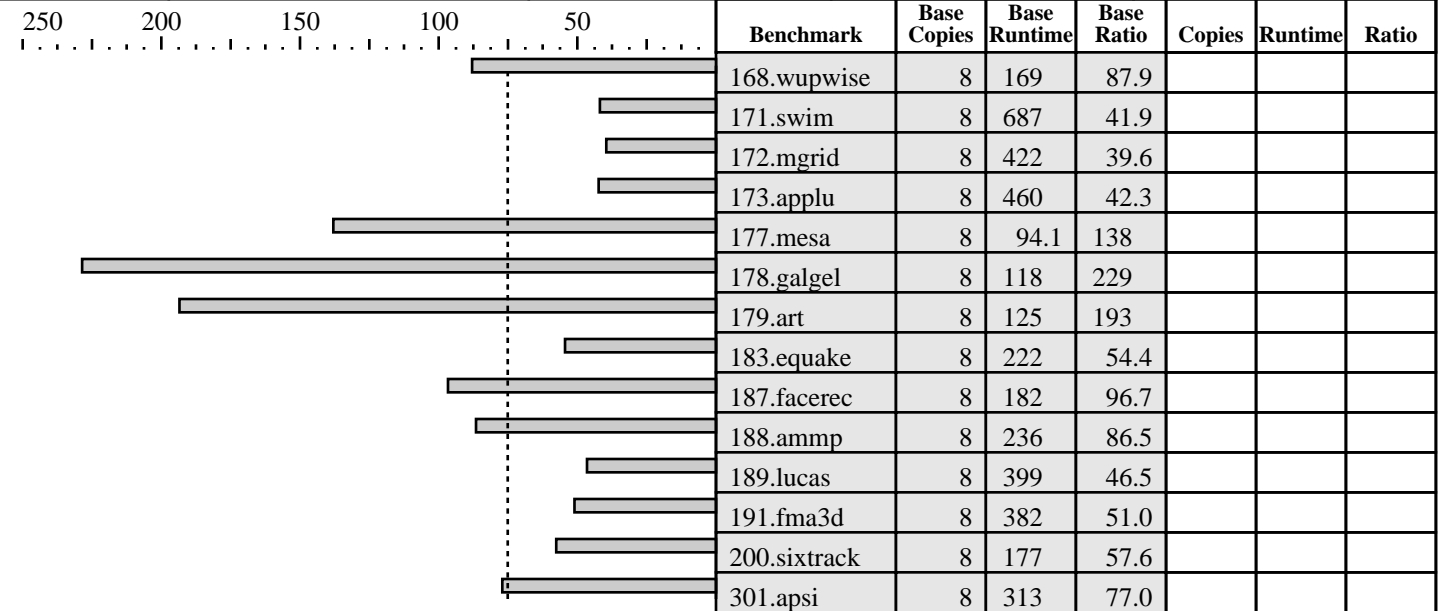

### Hardware

CPU: Intel Xeon processor E5310 (1.6 GHz, 1066 MHz bus)  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1, 2 chips  
 Parallel: No  
 Primary Cache: 32KB(I) + 32KB(D) on chip (per core)  
 Secondary Cache: 8MB(I+D) on chip, per chip (4MB shared per 2 cores)  
 L3 Cache: N/A  
 Other Cache: N/A  
 Memory: 8 x 1024 MB ECC PC2-5300F  
 Disk Subsystem: 80GB SATA 10K RPM  
 Other Hardware:

### Software

Operating System: Windows Server 2003 Enterprise Edition (32-bit)  
 Compiler: Intel C++ and Fortran Compiler 9.1 for 32-bit applications  
 Build 20060323Z  
 Microsoft Visual Studio 2005 (for libraries)  
 SmartHeap Library Version 8.0 from <http://www.microquill.com/>  
 File System: NTFS  
 System State: Default

## Notes/Tuning Information

```
+FDO: PASS1= -Qprof_gen PASS2=-Qprof_use
Base tuning for Fortran programs: -fast -Qansi_alias +FDO
Base tuning for C programs: -fast +FDO shlW32M.lib
Portability:
178.galgel: -FI /F32000000
```

This result was measured on an IBM System X 3400. IBM System X 3400 and IBM System X 3500 are electronically equivalent.