



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation


Itaotec

Servidor Itaotec LX211 (Intel Xeon 5130 processor, 2.00 GHz)

SPECfp_rate2000 = 36.4

SPECfp_rate_base2000 = 36.4

SPEC license #: 9001 | Tested by: Itaotec | Test date: Nov-2006 | Hardware Avail: Jul-2006 | Software Avail: May-2006

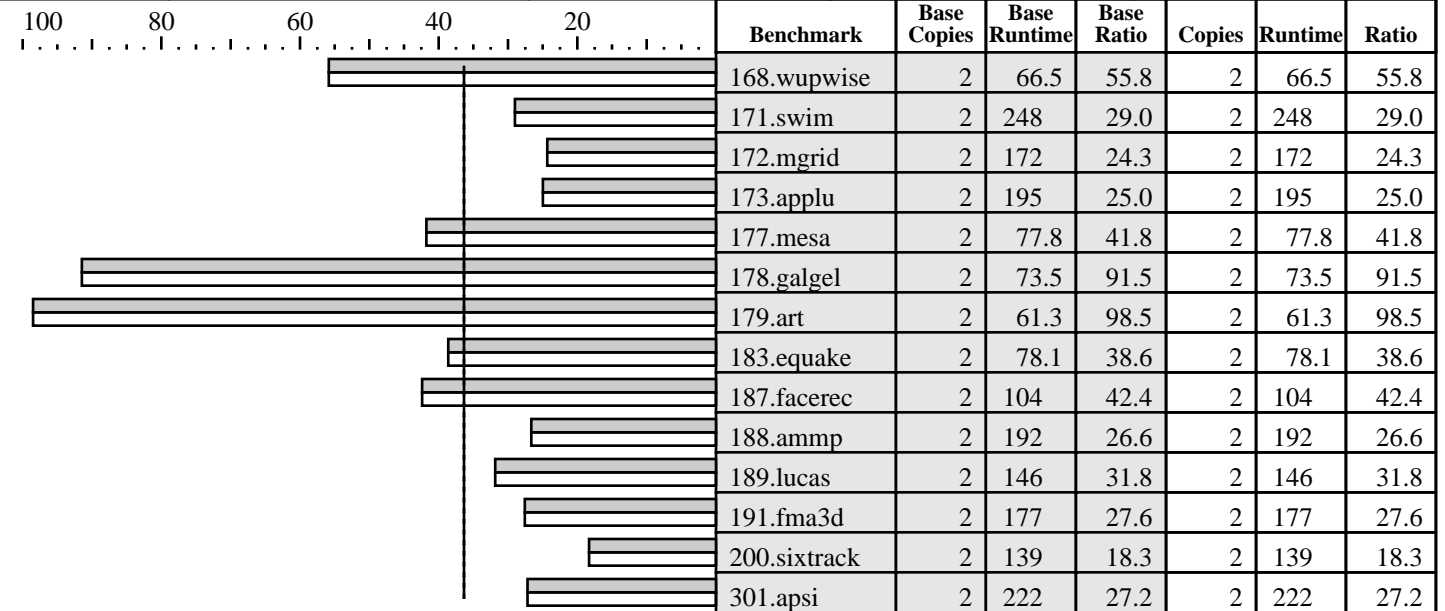

Hardware

CPU: Intel Xeon 5130 processor (2.00 GHz, 4MB L2 shared, 1333 MHz system bus)
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1
 Parallel: No
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4MB (I+D) on chip, per chip, shared
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 12GB (6x2GB DDR2-RAM PC2-5300 FB-DIMM CL5 ECC)
 Disk Subsystem: 1 x 120GB Serial ATA 7200 RPM
 Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise Edition + SP1 (32-bit)
 Compiler: Intel C++ Compiler 9.1
 Build 20060519Z (for 32-bit applications),
 Intel Fortran Compiler 9.1
 Build 20060519Z (for 32-bit applications),
 Microsoft Visual Studio 2005 (for libraries)
 MicroQuill SmartHeap for SMP Library 8.0
 File System: NTFS
 System State: Default

Notes/Tuning Information

PORTABILITY FLAGS

178.galgel: -FI /F32000000

GENERAL

+FDO: PASS1=-Qprof_gen PASS2=-Qprof_use

Base tuning flags

for Fortran programs: -fast -Qansi_alias +FDO

for C programs: -fast +FDO shlSMPMt.lib

EXTRA LIBRARIES

MicroQuill SmartHeap for SMP Library 8.0 available from
<http://www.microquill.com/>