SPEC SDM 1 Summary

057.SDET

Concurrent Workload	Throughput Scripts/Hr.
1	150.2
5	741.0
10	1329.4
20	1792.4
30	1898.1
37	1903.4
39	1909.7
43	1921.1
50	1914.3
55	1899.6
60	1879.4
70	1871.0
80	1829.8
90	1814.0
100	1794.4

IBM Corporation
RISC System/6000 POWERserver J30

Hardware		Software	
Model Number	POWERserver J30	O/S & Version	AIX 4.1.3 (Beta)
CPU	75MHz PowerPC 601	Compiler	IBM CSet++ Vers. 3.1.1
FPU	Integrated	Other Software	None
Number Of CPUs	8		
Primary Cache	32KB(I+D) on chip	**System**	
Secondary Cache	1MB(I+D) off chip	File System	AIX/JFS
Other Cache	None	Tuning Param.	See Notes
Memory	2GB	System State	Multi-user
Other Hardware	80 x 2.0, 3 x 1.0GB Diff. SCSI Disk (OS)		

Disk Subsystem

13 F/W SCSI Differential Adapters
Disks 0-2 OS,paging space
Disk0 - /,/usr,paging,/tmp,/home
Disk1 - /var; Disk2 - rootvg jfslog
Disks 3-42 File System /specout3-/specout42
Disks 43-46 Benchmark temporary dirs
Disks 47-82 File systems /specout47-/specout82
Each volume group includes 1 disk except rootvg disks 0-2
Layout of disk is file system and jfslog(1 phys. partition)

Availability:
Hardware: Jun-95
Software: Jun-95

License #: 11 **Tested:** Jun-95 **By:** IBM **Of:** Austin, TX

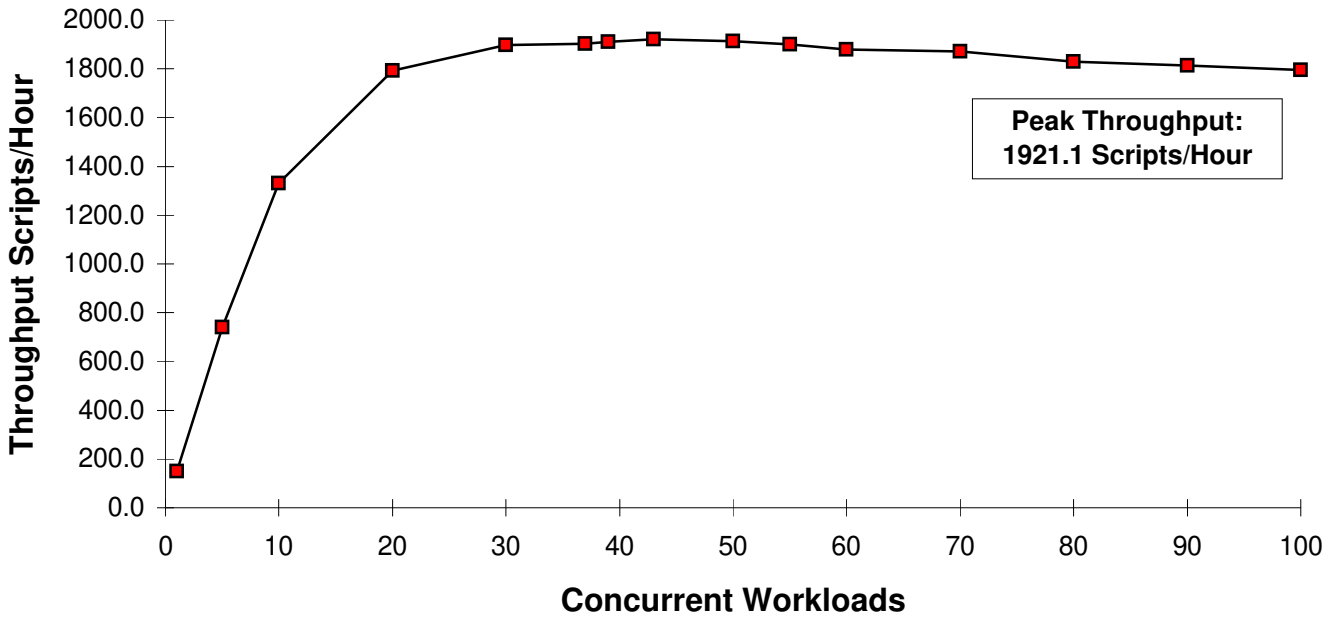

Tuning Parameters/Notes/Summary Of Changes:

© 1995 by Standard Performance Evaluation Corporation (ph:703-698-9604 ext. 325)