



SPEC ACCEL™ OMP Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology Intel Xeon Platinum 8280 CPU ThinkSystem SR650

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 6.79

ACCEL license: 16


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Apr-2019

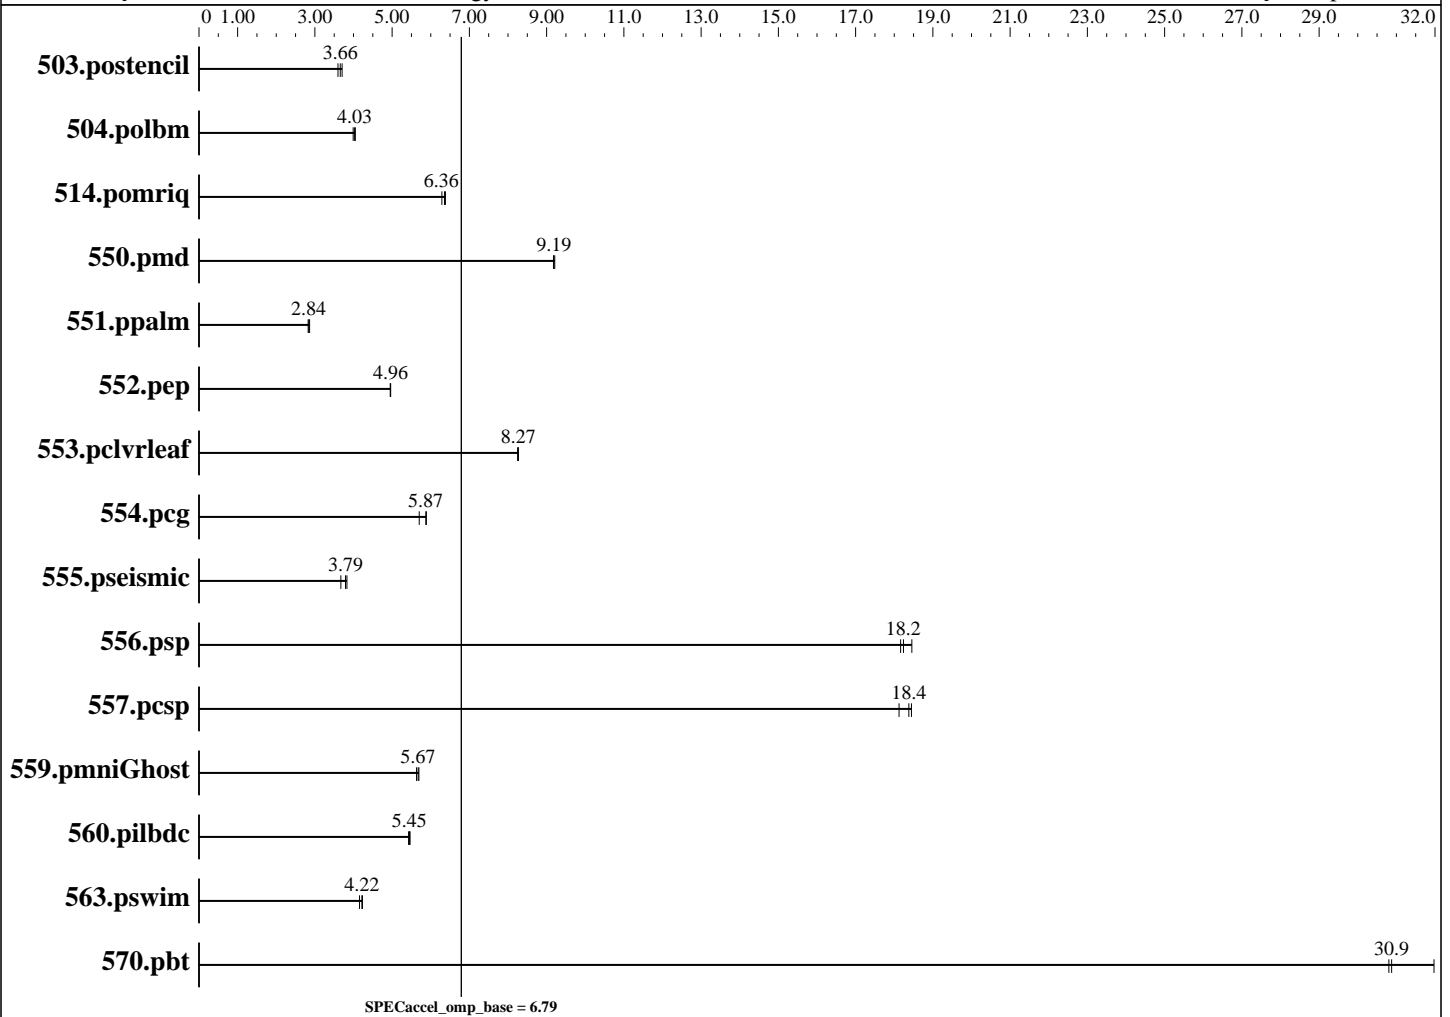

Hardware

CPU Name: (Intel Xeon Platinum 8280 CPU, 2.7 GHz)
 CPU Characteristics: Intel Turbo Boost Technology up to 4.0 GHz
 CPU MHz: 2700
 CPU MHz Maximum: 4000
 FPU: Integrated
 CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 Chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None

Continued on next page

Accelerator

Accel Model Name: Intel Xeon Platinum 8280 CPU
 Accel Vendor: Intel
 Accel Name: Intel Xeon Platinum 8280 CPU
 Type of Accel: CPU
 Accel Connection: 10.4 GT/s UPI
 Does Accel Use ECC: yes
 Accel Description: 2 x Intel Xeon Platinum 8280 CPU
 Accel Driver: None



SPEC ACCEL OMP Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
Intel Xeon Platinum 8280 CPU
ThinkSystem SR650

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 6.79

ACCEL license: 16	Test date: Mar-2019
Test sponsor: Lenovo Global Technology	Hardware Availability: Apr-2019
Tested by: Lenovo Global Technology	Software Availability: Apr-2019

Hardware (Continued)

Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Disk Subsystem: 1 X Lenovo 1 TB SAS 2.5" HDD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.6,
 kernel 3.10.0.957.el7.x86_64
 Compiler: Intel C/C++/Fortran 18.0 Update 3 for Linux
 Version 18.0.3 Build 20180210
 File System: xfs
 System State: Default
 Other Software: FFTW 3.3.8

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.postencil	<u>29.8</u>	<u>3.66</u>	30.3	3.60	29.4	3.71						
504.polbm	30.6	3.99	<u>30.3</u>	<u>4.03</u>	30.1	4.05						
514.pomriq	97.3	6.38	98.8	6.29	<u>97.7</u>	<u>6.36</u>						
550.pmd	<u>26.2</u>	<u>9.19</u>	26.2	9.21	26.3	9.18						
551.ppalm	<u>191</u>	<u>2.84</u>	192	2.83	190	2.86						
552.pep	<u>46.6</u>	<u>4.96</u>	46.6	4.96	46.7	4.95						
553.pclvrleaf	139	8.25	138	8.27	<u>138</u>	<u>8.27</u>						
554.pcg	58.4	5.70	56.6	5.89	<u>56.7</u>	<u>5.87</u>						
555.pseismic	<u>74.3</u>	<u>3.79</u>	73.6	3.83	76.8	3.67						
556.psp	45.0	18.2	44.3	18.5	<u>44.8</u>	<u>18.2</u>						
557.pcsp	46.6	18.4	47.4	18.1	<u>46.7</u>	<u>18.4</u>						
559.pmniGhost	<u>70.0</u>	<u>5.67</u>	69.7	5.69	70.5	5.63						
560.pilbdc	119	5.46	120	5.43	<u>120</u>	<u>5.45</u>						
563.pswim	<u>37.7</u>	<u>4.22</u>	37.6	4.23	38.3	4.16						
570.pbt	25.3	30.8	24.4	32.0	<u>25.3</u>	<u>30.9</u>						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.



SPEC ACCEL OMP Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
Intel Xeon Platinum 8280 CPU
ThinkSystem SR650

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 6.79

ACCEL license: 16
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Apr-2019

Platform Notes

Sysinfo program /home/ACCEL1.2/Docs/sysinfo
\$Rev: 6965 \$ \$Date:: 2015-04-21 #\$ c05a7f14b1b1765e3feldf68447e8a35
running on slave5 Wed Mar 09 04:13:48 2019

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/accel/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
 2 "physical id"s (chips)
112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 28
  siblings  : 56
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
cache size : 39424 KB
```

```
From /proc/meminfo
MemTotal:      792031280 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.6 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.6"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

```
uname -a:
Linux slave5 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 09 16:15

SPEC is set to: /home/ACCEL1.2

Continued on next page



SPEC ACCEL OMP Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
Intel Xeon Platinum 8280 CPU
ThinkSystem SR650

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 6.79

ACCEL license: 16
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Apr-2019

Platform Notes (Continued)

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   221G  42G  179G  20% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo -[IVE135S-2.10]- 03/08/2019
Memory:
 24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933 MT/s
```

(End of data from sysinfo program)

General Notes

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

```
503.postencil: -DSPEC_USE_INNER_SIMD
504.polbm: -DSPEC_USE_INNER_SIMD
514.pomriq: -DSPEC_USE_INNER_SIMD
550.pmd: -DSPEC_USE_INNER_SIMD -80
551.ppalm: -DSPEC_USE_INNER_SIMD
552.pep: -DSPEC_USE_INNER_SIMD
```

Continued on next page



SPEC ACCEL OMP Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
Intel Xeon Platinum 8280 CPU
ThinkSystem SR650

SPECaccel_omp_peak = Not Run

SPECaccel_omp_base = 6.79

ACCEL license: 16

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Apr-2019

Base Portability Flags (Continued)

```
553.pclvrleaf: -DSPEC_USE_INNER_SIMD
554.pcg: -DSPEC_USE_INNER_SIMD
555.pseismic: -DSPEC_USE_INNER_SIMD
556.psp: -DSPEC_USE_INNER_SIMD
557.pcsp: -DSPEC_USE_INNER_SIMD
559.pmniGhost: -DSPEC_USE_INNER_SIMD -nofor-main
560.pilbdc: -DSPEC_USE_INNER_SIMD
563.pswim: -DSPEC_USE_INNER_SIMD
570.pbt: -DSPEC_USE_INNER_SIMD
```

Base Optimization Flags

C benchmarks:

```
-O3 -xCOMMON-AVX512 -qopenmp -qopenmp-offload=host
```

Fortran benchmarks:

```
-O3 -xCOMMON-AVX512 -qopenmp -qopenmp-offload=host
```

Benchmarks using both Fortran and C:

```
-O3 -xCOMMON-AVX512 -qopenmp -qopenmp-offload=host
```

The flags files that were used to format this result can be browsed at

https://www.spec.org/accel/flags/Lenovo-SPECACCEL1.2_Platform_Flags.html

<https://www.spec.org/accel/flags/Intel-icc17.0-linux64.20190321.html>

You can also download the XML flags sources by saving the following links:

https://www.spec.org/accel/flags/Lenovo-SPECACCEL1.2_Platform_Flags.xml

<https://www.spec.org/accel/flags/Intel-icc17.0-linux64.20190321.xml>

SPEC ACCEL is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC ACCEL v1.2.

Report generated on Tue Apr 2 13:42:31 2019 by SPEC ACCEL PS/PDF formatter v1290.

Originally published on 2 April 2019.