



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]_rate2006 = 48.1

HP Integrity rx2660
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 46.4

CPU2006 license: 03


Test date: Jan-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Feb-2007

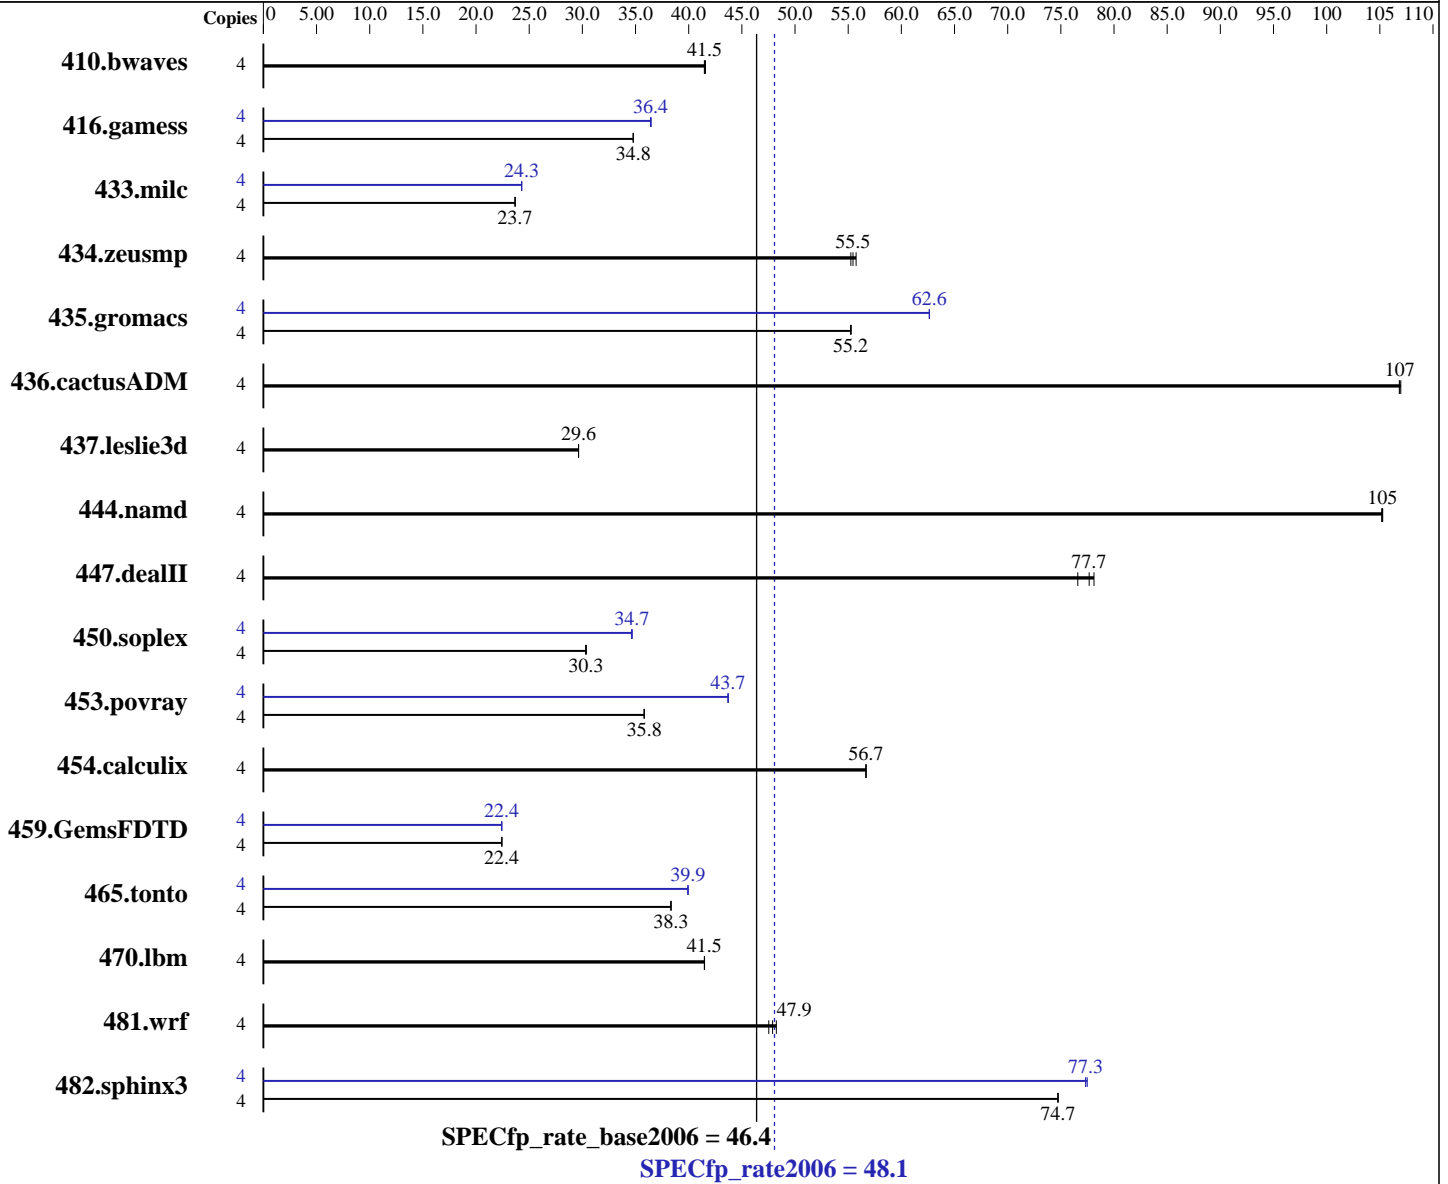

Hardware

CPU Name: Dual-Core Intel Itanium 2 9040
 CPU Characteristics: 1.6GHz/18MB, 533MHz FSB
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1-2 chips
 Primary Cache: 16 KB I + 16 KB D on chip per core
 Secondary Cache: 1 MB I + 256 KB D on chip per core

Continued on next page

Software

Operating System: HPUX11i-TCOE B.11.23.0609
 Compiler: HP C/aC++ Developer's Bundle C.11.23.12
 HP Fortran90 Compiler B.11.23.32
 Auto Parallel: No
 File System: vxfs
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 48.1

HP Integrity rx2660
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 46.4

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2007
Hardware Availability: Feb-2007
Software Availability: Feb-2007

L3 Cache: 9 MB I+D on chip per core
Other Cache: None
Memory: 8 GB (4x2GB DIMMs)
Disk Subsystem: 73GB 10K RPM SAS
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1307	41.6	<u>1309</u>	<u>41.5</u>	1311	41.5	4	1307	41.6	<u>1309</u>	<u>41.5</u>	1311	41.5
416.gamess	4	2252	34.8	<u>2252</u>	<u>34.8</u>	2251	34.8	4	2148	36.5	<u>2150</u>	<u>36.4</u>	2151	36.4
433.milc	4	1552	23.7	<u>1551</u>	<u>23.7</u>	1551	23.7	4	1511	24.3	<u>1512</u>	<u>24.3</u>	1512	24.3
434.zeusmp	4	653	55.7	<u>656</u>	<u>55.5</u>	659	55.3	4	653	55.7	<u>656</u>	<u>55.5</u>	659	55.3
435.gromacs	4	<u>517</u>	<u>55.2</u>	517	55.3	517	55.2	4	456	62.6	456	62.6	<u>456</u>	<u>62.6</u>
436.cactusADM	4	<u>447</u>	<u>107</u>	447	107	447	107	4	<u>447</u>	<u>107</u>	447	107	447	107
437.leslie3d	4	<u>1269</u>	<u>29.6</u>	1268	29.6	1269	29.6	4	<u>1269</u>	<u>29.6</u>	1268	29.6	1269	29.6
444.namd	4	305	105	<u>305</u>	<u>105</u>	305	105	4	305	105	<u>305</u>	<u>105</u>	305	105
447.dealII	4	<u>589</u>	<u>77.7</u>	586	78.1	597	76.6	4	<u>589</u>	<u>77.7</u>	586	78.1	597	76.6
450.soplex	4	1101	30.3	<u>1100</u>	<u>30.3</u>	1098	30.4	4	962	34.7	<u>962</u>	<u>34.7</u>	964	34.6
453.povray	4	594	35.8	594	35.8	<u>594</u>	<u>35.8</u>	4	487	43.7	<u>487</u>	<u>43.7</u>	487	43.7
454.calculix	4	582	56.7	<u>582</u>	<u>56.7</u>	582	56.7	4	582	56.7	<u>582</u>	<u>56.7</u>	582	56.7
459.GemsFDTD	4	<u>1893</u>	<u>22.4</u>	1893	22.4	1892	22.4	4	<u>1893</u>	<u>22.4</u>	1893	22.4	1894	22.4
465.tonto	4	1026	38.3	<u>1027</u>	<u>38.3</u>	1027	38.3	4	986	39.9	<u>986</u>	<u>39.9</u>	985	39.9
470.lbm	4	<u>1325</u>	<u>41.5</u>	1325	41.5	1325	41.5	4	<u>1325</u>	<u>41.5</u>	1325	41.5	1325	41.5
481.wrf	4	940	47.5	<u>933</u>	<u>47.9</u>	926	48.2	4	940	47.5	<u>933</u>	<u>47.9</u>	926	48.2
482.sphinx3	4	<u>1043</u>	<u>74.7</u>	1043	74.7	1043	74.7	4	1006	77.5	<u>1008</u>	<u>77.3</u>	1008	77.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

The system had the September 2006 HP-UX 11i v2 Technical Computing Operating Environment (TCOE) and compilers installed, along with the following patches:

```

PHSS_34858 linker + fdp cumulative patch
PHSS_34853 Math Library Cumulative Patch
PHSS_34854 Integrity Unwind Library
PHSS_34855 HP C Compiler (A.06.12)
PHSS_34856 aC++ Compiler (A.06.12)
PHSS_34857 u2comp/be/plugin library patch
PHSS_34395 FORTRAN I/O Library [libIO77]
PHSS_34397 FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399 Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020 Perfmon enhancements and Itanium Dual-Core

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 48.1

HP Integrity rx2660
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 46.4

CPU2006 license: 03

Test date: Jan-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Feb-2007

Operating System Notes (Continued)

The following kernel tunables were set, in addition to the defaults set by the Technical Computing OE:

```
dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608
```

Base Compiler Invocation

C benchmarks:

```
/opt/ansic/bin/cc -Ae
```

C++ benchmarks:

```
/opt/aCC/bin/aCC -Aa
```

Fortran benchmarks:

```
/opt/fortran90/bin/f90
```

Benchmarks using both Fortran and C:

```
/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90
```

Base Portability Flags

```
453.povray: -DSPEC_CPU_NEED_INVHYP
454.calculix: -DSPEC_CPU_NOZMODIFIER
481.wrf: -DNOUNDERSCORE +noppu
```

Base Optimization Flags

C benchmarks:

```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
```

C++ benchmarks:

```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
```

Fortran benchmarks:

```
+Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N
```

Benchmarks using both Fortran and C:

```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 48.1

HP Integrity rx2660
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 46.4

CPU2006 license: 03

Test date: Jan-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Feb-2007

Peak Compiler Invocation

C benchmarks:

`/opt/ansic/bin/cc -Ae`

C++ benchmarks:

`/opt/aCC/bin/aCC -Aa`

Fortran benchmarks:

`/opt/fortran90/bin/f90`

Benchmarks using both Fortran and C:

`/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90`

Peak Portability Flags

453.povray: `-DSPEC_CPU_NEED_INVHYP`

454.calculix: `-DSPEC_CPU_NOZMODIFIER`

481.wrf: `-DNOUNDERSCORE +noppu`

Peak Optimization Flags

C benchmarks:

433.milc: `+Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N`

470.lbm: `basepeak = yes`

482.sphinx3: `+Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap`

C++ benchmarks:

444.namd: `basepeak = yes`

447.dealIII: `basepeak = yes`

450.soplex: `+Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N`

453.povray: `+Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 48.1

HP Integrity rx2660
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 46.4

CPU2006 license: 03

Test date: Jan-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Feb-2007

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: +Ofaster -Wl, -a, archive_shared -Wl, +pd, 64M -Wl, +pi, 64M
+Odataprefetch=direct -Wl, -N

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
-Wl, -a, archive_shared -Wl, +pd, 64M -Wl, +pi, 64M
+Odataprefetch=direct -Wl, -N

465.tonto: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
-Wl, -a, archive_shared -Wl, +pd, 64M -Wl, +pi, 64M
+Odataprefetch=direct

Benchmarks using both Fortran and C:

435.gromacs: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl, -a, archive_shared -Wl, +pd, 64M
-Wl, +pi, 64M +Onoparmsoverlap

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.07.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.07.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:18:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 February 2007.