



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp[®]_rate2006 = 45.0

Servidor Itautec LX211 (Intel Xeon X5355)

SPECfp_rate_base2006 = 45.0

CPU2006 license: 9001


Test sponsor: Itautec

Tested by: Itautec

Test date: Feb-2007

Hardware Availability: Feb-2007

Software Availability: May-2006

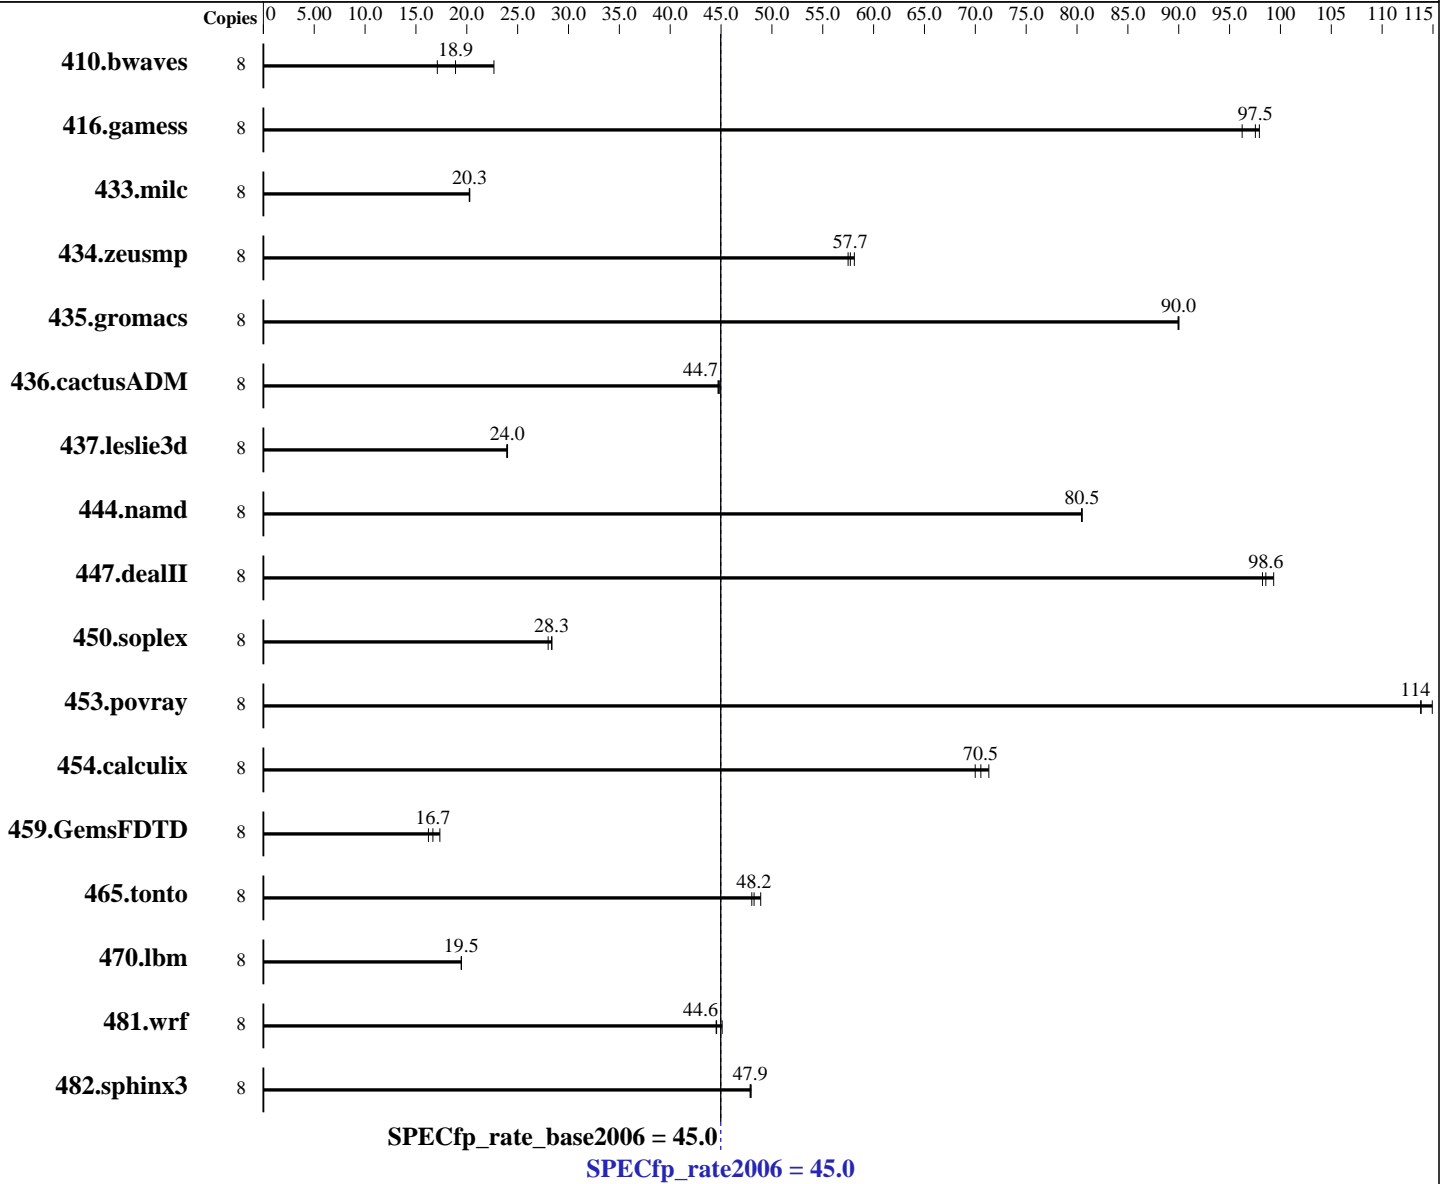

Hardware

CPU Name: Intel Xeon X5355
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 2660
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1-2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: Windows Server 2003 Enterprise Edition + SP1 (32-bit)
 Compiler: Intel C++ Compiler for IA32 version 9.1
 Package ID W_CC_C_9.1.025 Build no 20060519Z
 Intel Fortran Compiler for IA32 version 9.1
 Package ID W_FC_C_9.1.025 Build no 20060519Z
 Microsoft Visual Studio .NET 2003 7.1.3088 (for libraries)
 Auto Parallel: No
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 45.0

Servidor Itaotec LX211 (Intel Xeon X5355)

SPECfp_rate_base2006 = 45.0

CPU2006 license: 9001

Test date: Feb-2007

Test sponsor: Itaotec

Hardware Availability: Feb-2007

Tested by: Itaotec

Software Availability: May-2006

L3 Cache: None
Other Cache: None
Memory: 6 GB (6x1GB DDR2-RAM PC2-5300F CAS 5-5-5)
Disk Subsystem: 120 GB SATA, 7200RPM
Other Hardware: None

System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: Microquill SmartHeap Library v.8.0 for SMP

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	5755	18.9	6357	17.1	4796	22.7	8	5755	18.9	6357	17.1	4796	22.7
416.gamess	8	1606	97.5	1600	97.9	1628	96.2	8	1606	97.5	1600	97.9	1628	96.2
433.milc	8	3628	20.2	3621	20.3	3621	20.3	8	3628	20.2	3621	20.3	3621	20.3
434.zeusmp	8	1261	57.7	1266	57.5	1253	58.1	8	1261	57.7	1266	57.5	1253	58.1
435.gromacs	8	635	89.9	635	90.0	635	90.0	8	635	89.9	635	90.0	635	90.0
436.cactusADM	8	2138	44.7	2137	44.7	2131	44.9	8	2138	44.7	2137	44.7	2131	44.9
437.leslie3d	8	3132	24.0	3143	23.9	3133	24.0	8	3132	24.0	3143	23.9	3133	24.0
444.namd	8	797	80.5	797	80.5	798	80.4	8	797	80.5	797	80.5	798	80.4
447.dealII	8	921	99.3	929	98.6	932	98.2	8	921	99.3	929	98.6	932	98.2
450.soplex	8	2355	28.3	2383	28.0	2352	28.4	8	2355	28.3	2383	28.0	2352	28.4
453.povray	8	374	114	374	114	370	115	8	374	114	374	114	370	115
454.calculix	8	943	70.0	925	71.3	936	70.5	8	943	70.0	925	71.3	936	70.5
459.GemsFDTD	8	5230	16.2	4891	17.4	5093	16.7	8	5230	16.2	4891	17.4	5093	16.7
465.tonto	8	1639	48.0	1610	48.9	1632	48.2	8	1639	48.0	1610	48.9	1632	48.2
470.lbm	8	5646	19.5	5645	19.5	5648	19.5	8	5646	19.5	5645	19.5	5648	19.5
481.wrf	8	2007	44.5	2005	44.6	1981	45.1	8	2007	44.5	2005	44.6	1981	45.1
482.sphinx3	8	3257	47.9	3257	47.9	3251	48.0	8	3257	47.9	3257	47.9	3251	48.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Base Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc7.1 -Qc99 ifort



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 45.0

Servidor Itaotec LX211 (Intel Xeon X5355)

SPECfp_rate_base2006 = 45.0

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Feb-2007
Hardware Availability: Feb-2007
Software Availability: May-2006

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-DBOOST_NO_INTRINSIC_WCHAR_T
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:
-fast /F950000000 shlSMPMt.lib -link /FORCE:MULTIPLE

C++ benchmarks:
-fast -Qcxx_features /F950000000 shlSMPMt.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
-fast /F950000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:
-fast /F950000000 -link /FORCE:MULTIPLE

Peak Optimization Flags

C benchmarks:
433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

C++ benchmarks:
444.namd: basepeak = yes
447.dealII: basepeak = yes
450.soplex: basepeak = yes
453.povray: basepeak = yes

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 45.0

Servidor Itautec LX211 (Intel Xeon X5355)

SPECfp_rate_base2006 = 45.0

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Feb-2007

Hardware Availability: Feb-2007

Software Availability: May-2006

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-ic91-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautec-ic91-flags.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:44:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 March 2007.