



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 23.6

Dell Precision T3400 (Intel QX9650, 3.00 GHz)

SPECint\_base2006 = 20.8

CPU2006 license: 55


Test date: Dec-2007

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: Nov-2007

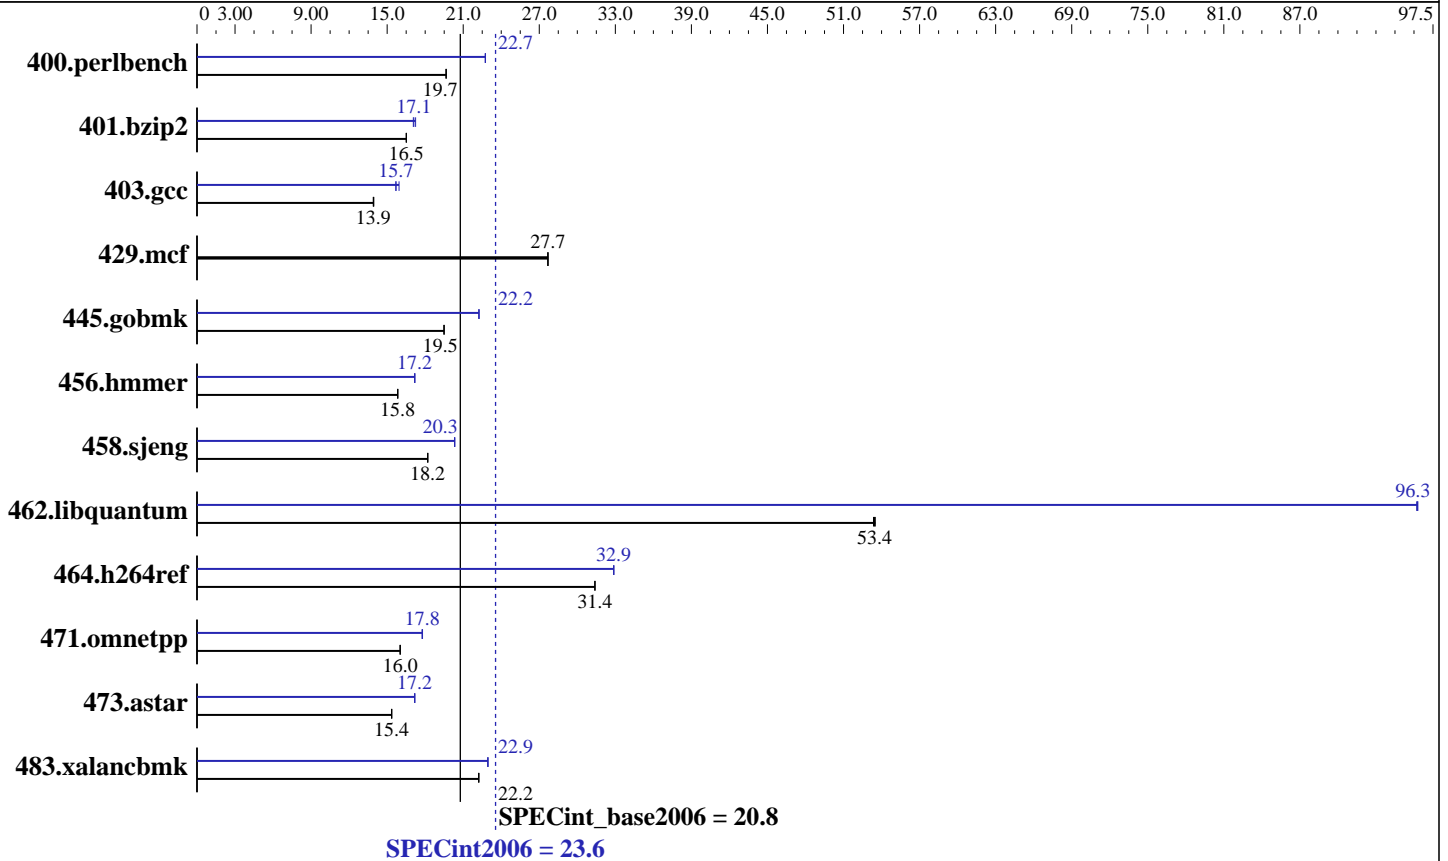

## Hardware

CPU Name: Intel Core 2 Extreme QX9650  
 CPU Characteristics: 1333 MHz Bus Speed  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (4x2 GB 800 MHz ECC CL6 DDR2)  
 Disk Subsystem: 1 x 80 GB SATA 7200 RPM  
 Other Hardware: None

## Software

Operating System: Windows XP Professional x64 Edition SP2  
 Compiler: Intel C++ Compiler for IA-32, Version 10.1  
 Build 20070913 Package ID: w\_cc\_p\_10.1.011  
 Microsoft Visual Studio 2005 SP1  
 Auto Parallel: Yes  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill SmartHeap Library 8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 23.6

Dell Precision T3400 (Intel QX9650, 3.00 GHz)

SPECint\_base2006 = 20.8

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Dec-2007  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	497	19.7	497	19.6	<u>497</u>	<u>19.7</u>	429	22.8	430	22.7	<u>430</u>	<u>22.7</u>
401.bzip2	<u>584</u>	<u>16.5</u>	584	16.5	584	16.5	560	17.2	566	17.1	<u>564</u>	<u>17.1</u>
403.gcc	<u>579</u>	<u>13.9</u>	577	13.9	579	13.9	505	15.9	513	15.7	<u>513</u>	<u>15.7</u>
429.mcf	329	27.7	<u>330</u>	<u>27.7</u>	330	27.7	329	27.7	<u>330</u>	<u>27.7</u>	330	27.7
445.gobmk	538	19.5	<u>538</u>	<u>19.5</u>	538	19.5	<u>472</u>	<u>22.2</u>	472	22.2	472	22.2
456.hammer	<u>589</u>	<u>15.8</u>	589	15.8	589	15.8	543	17.2	543	17.2	<u>543</u>	<u>17.2</u>
458.sjeng	<u>665</u>	<u>18.2</u>	665	18.2	665	18.2	<u>595</u>	<u>20.3</u>	595	20.3	595	20.3
462.libquantum	387	53.5	388	53.4	<u>388</u>	<u>53.4</u>	215	96.3	<u>215</u>	<u>96.3</u>	215	96.2
464.h264ref	705	31.4	705	31.4	<u>705</u>	<u>31.4</u>	673	32.9	<u>673</u>	<u>32.9</u>	673	32.9
471.omnetpp	<u>390</u>	<u>16.0</u>	390	16.0	390	16.0	351	17.8	<u>352</u>	<u>17.8</u>	352	17.8
473.astar	<u>457</u>	<u>15.4</u>	457	15.3	457	15.4	409	17.2	<u>409</u>	<u>17.2</u>	409	17.2
483.xalancbmk	310	22.2	<u>310</u>	<u>22.2</u>	311	22.2	301	23.0	301	22.9	<u>301</u>	<u>22.9</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Binaries were built on Windows Vista Ultimate (64-bit)

## Base Compiler Invocation

C benchmarks:  
icl -Qstd=c99  
C++ benchmarks:  
icl

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Base Optimization Flags

C benchmarks:  
-fast -Qparallel -Qpar-runtime-control -Qvec-guard-write /F512000000  
shlw32mt.lib libguide40.lib -link /FORCE:MULTIPLE

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 23.6

Dell Precision T3400 (Intel QX9650, 3.00 GHz)

SPECint\_base2006 = 20.8

CPU2006 license: 55

Test date: Dec-2007

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: Nov-2007

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-fast -Qcxx_features /F512000000 shlw32mt.lib libguide40.lib
-link /FORCE:MULTIPLE
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks:

```
icl -Qstd=c99
```

C++ benchmarks:

```
icl
```

## Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qprefetch -Qparallel -Qpar-runtime-control /F512000000
shlw32mt.lib libguide40.lib
-link /FORCE:MULTIPLE
```

```
401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qprefetch
/F512000000 shlw32mt.lib libguide40.lib
-link /FORCE:MULTIPLE
```

```
403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000
shlw32mt.lib libguide40.lib
-link /FORCE:MULTIPLE
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 23.6

Dell Precision T3400 (Intel QX9650, 3.00 GHz)

SPECint\_base2006 = 20.8

CPU2006 license: 55

Test date: Dec-2007

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

429.mcf:basepeak = yes

445.gobmk: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -QxT -O2 -Qipo  
-Qprec-div- -Qansi-alias /F512000000  
-link /FORCE:MULTIPLE

456.hmmr: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll2  
-Qansi-alias -Qopt-multi-version-aggressive /F512000000  
shlw32mt.lib libguide40.lib  
-link /FORCE:MULTIPLE

458.sjeng: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll4  
/F512000000 shlw32mt.lib libguide40.lib  
-link /FORCE:MULTIPLE

462.libquantum: -fast -Qunroll4 -Ob0 -Qprefetch  
-Qopt-streaming-stores:always -Qparallel  
-Qpar-runtime-control /F512000000 shlw32mt.lib  
libguide40.lib -link /FORCE:MULTIPLE

464.h264ref: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qunroll2  
-Qansi-alias /F512000000 shlw32mt.lib libguide40.lib  
-link /FORCE:MULTIPLE

C++ benchmarks:

471.omnetpp: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qansi-alias  
-Qopt-ra-region-strategy=block -Qcxx\_features /F512000000  
shlw32mt.lib libguide40.lib  
-link /FORCE:MULTIPLE

473.astar: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qansi-alias  
-Qopt-ra-region-strategy=routine -Qcxx\_features /F512000000  
shlw32mt.lib libguide40.lib  
-link /FORCE:MULTIPLE

483.xalancbmk: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qansi-alias  
-Qcxx\_features /F512000000 shlw32mt.lib libguide40.lib  
-link /FORCE:MULTIPLE

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 23.6

Dell Precision T3400 (Intel QX9650, 3.00 GHz)

SPECint\_base2006 = 20.8

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Dec-2007

Hardware Availability: Jan-2008

Software Availability: Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090714.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 15:02:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 December 2007.