



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint®_rate2006 = Not Run

PRIMERGY BX620 S4, Intel Xeon X5460, 3.16 GHz

SPECint_rate_base2006 = 112

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

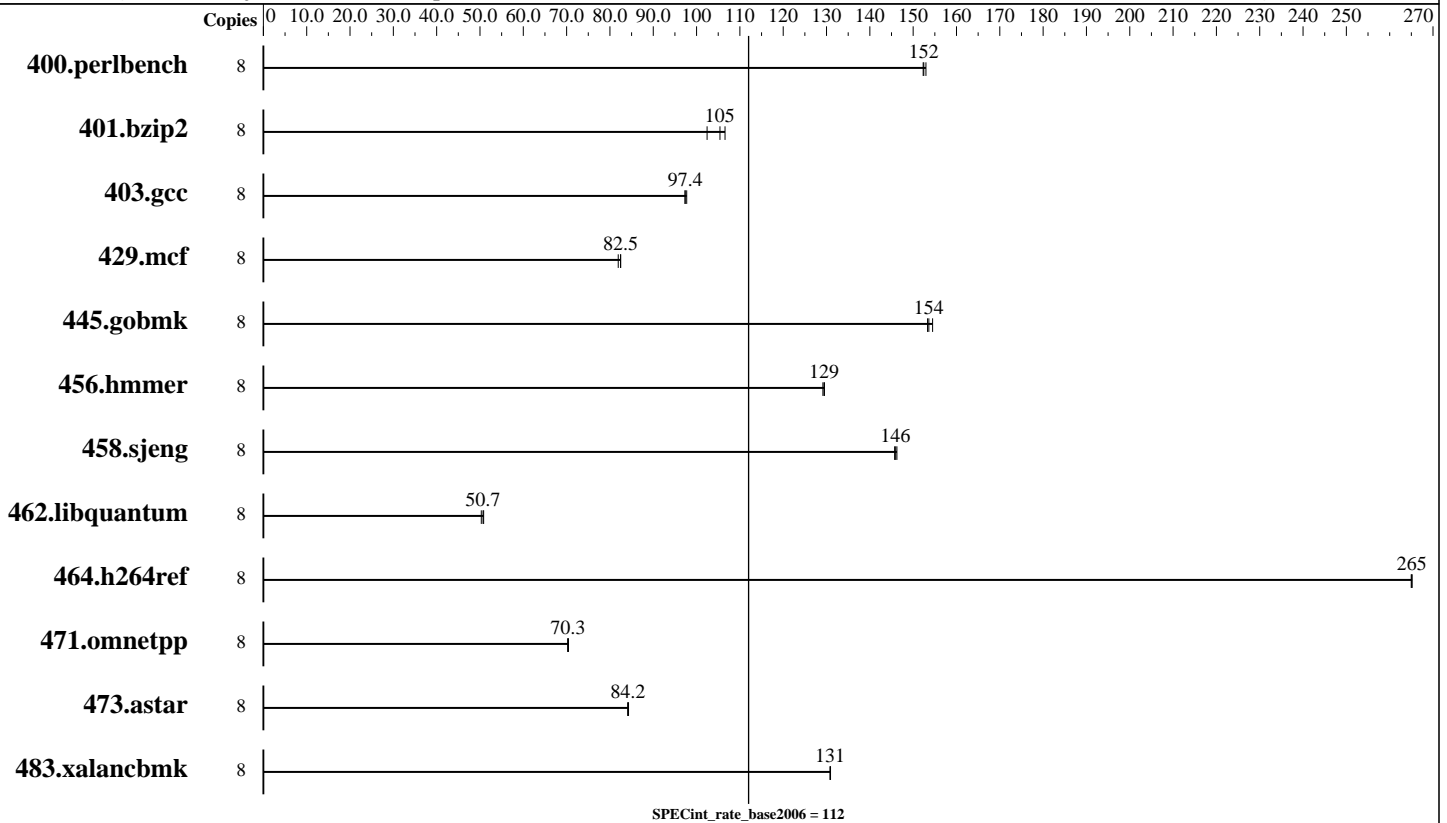

Hardware

CPU Name: Intel Xeon X5460
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 3167
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL 5-5-5, ECC)
 Disk Subsystem: 1x SAS, 73 GB, 15000 rpm
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64, Version 10.1, Build 20070913
 Auto Parallel: No
 File System: ext2
 System State: Multi-User Run Level 3
 Base Pointers: 32-bit
 Peak Pointers: Not Applicable
 Other Software: MicroQuill SmartHeap Library, Version 8.1 binutils-2.17.50.0.5-0.1.x86_64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = Not Run

PRIMERGY BX620 S4, Intel Xeon X5460, 3.16 GHz

SPECint_rate_base2006 = 112

CPU2006 license: 22

Test date: Feb-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Mar-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	513	152	<u>513</u>	<u>152</u>	511	153							
401.bzip2	8	754	102	<u>732</u>	<u>105</u>	724	107							
403.gcc	8	662	97.3	659	97.7	661	97.4							
429.mcf	8	885	82.5	891	81.9	885	82.5							
445.gobmk	8	543	154	546	154	547	153							
456.hammer	8	577	129	578	129	576	130							
458.sjeng	8	664	146	663	146	662	146							
462.libquantum	8	3295	50.3	3269	50.7	3260	50.8							
464.h264ref	8	668	265	668	265	668	265							
471.omnetpp	8	711	70.3	712	70.2	710	70.4							
473.astar	8	666	84.3	667	84.2	668	84.1							
483.xalancbmk	8	422	131	422	131	422	131							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

General Notes

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = Not Run

PRIMERGY BX620 S4, Intel Xeon X5460, 3.16 GHz

SPECint_rate_base2006 = 112

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Feb-2008

Hardware Availability: Mar-2008

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:31:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 March 2008.