



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 19.2

IBM BladeCenter LS22 (AMD Opteron 2356)

SPECfp_base2006 = 18.2

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2008

Hardware Availability: Sep-2008

Software Availability: May-2008

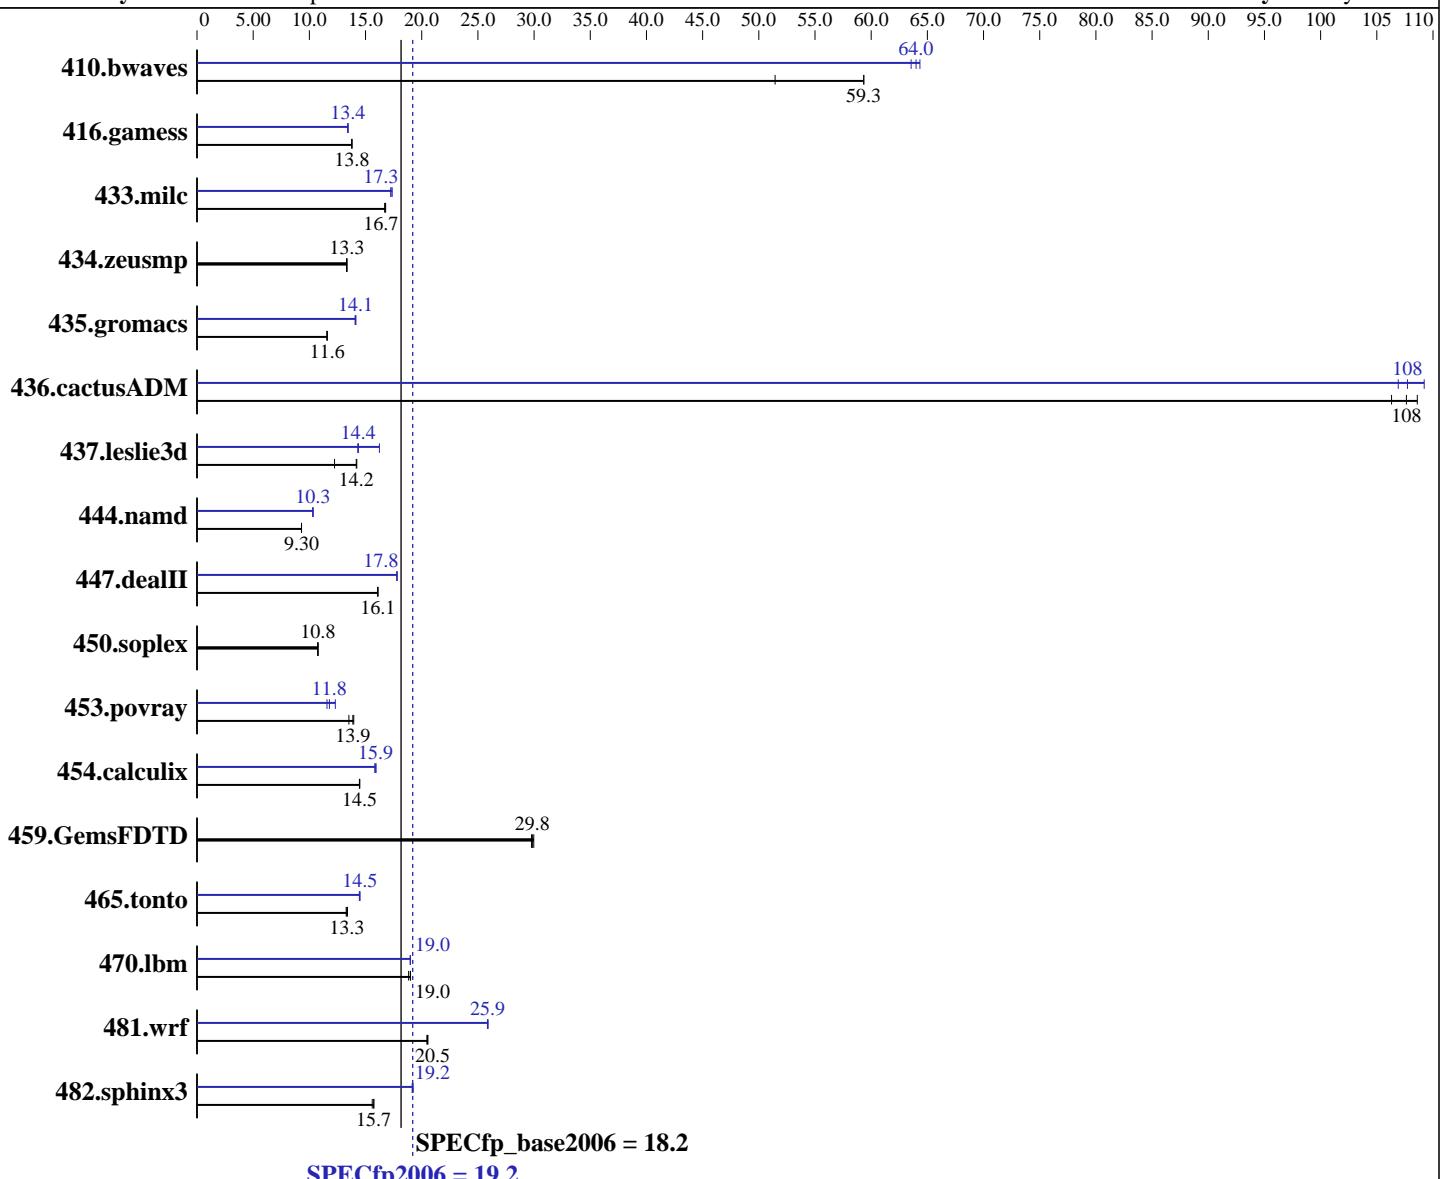

Hardware

CPU Name: AMD Opteron 2356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18.50

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 19.2

IBM BladeCenter LS22 (AMD Opteron 2356)

SPECfp_base2006 = 18.2

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8 x 4 GB DDR2-6400 ECC)
 Disk Subsystem: 1 x 36 GB SAS, 10000 RPM
 Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	229	59.3	264	51.4	229	59.3	211	64.3	214	63.6	212	64.0
416.gamess	1420	13.8	1421	13.8	1421	13.8	1456	13.4	1459	13.4	1458	13.4
433.milc	547	16.8	550	16.7	548	16.7	532	17.3	532	17.3	528	17.4
434.zeusmp	682	13.3	684	13.3	682	13.3	682	13.3	684	13.3	682	13.3
435.gromacs	616	11.6	618	11.6	616	11.6	505	14.1	506	14.1	508	14.1
436.cactusADM	110	109	111	108	112	106	112	107	111	108	109	109
437.leslie3d	663	14.2	661	14.2	768	12.2	579	16.2	654	14.4	657	14.3
444.namd	862	9.30	862	9.30	862	9.30	778	10.3	776	10.3	778	10.3
447.dealII	711	16.1	711	16.1	711	16.1	643	17.8	643	17.8	643	17.8
450.soplex	774	10.8	776	10.7	774	10.8	774	10.8	776	10.7	774	10.8
453.povray	384	13.9	394	13.5	381	14.0	460	11.6	451	11.8	432	12.3
454.calculix	570	14.5	571	14.5	570	14.5	519	15.9	518	15.9	522	15.8
459.GemsFDTD	355	29.8	356	29.8	354	30.0	355	29.8	356	29.8	354	30.0
465.tonto	738	13.3	741	13.3	735	13.4	679	14.5	679	14.5	681	14.4
470.lbm	730	18.8	724	19.0	723	19.0	723	19.0	723	19.0	724	19.0
481.wrf	544	20.5	546	20.5	544	20.5	432	25.9	432	25.9	431	25.9
482.sphinx3	1250	15.6	1238	15.7	1239	15.7	1015	19.2	1018	19.1	1013	19.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

'numactl' was used to bind copies to the cores.

Environment stack size set to 'unlimited'.

'ulimit -l 2097152' was used to set environment locked pages in memory quantity.

NCPUS set to number of cores.

PGI_HUGE_PAGES set to 896.

Set vm/nr_hugepages=7168 in /etc/sysctl.conf

mount -t hugetlbfs none /mnt/hugepages

Processor Performance States Disabled in BIOS

Memory ChipKill Disabled in BIOS



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 19.2

IBM BladeCenter LS22 (AMD Opteron 2356)

SPECfp_base2006 = 18.2

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: May-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
  444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-fastsse -Msmartralloc=huge:896 -Mconcur -Mfprelaxed -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

C++ benchmarks:

```
-fastsse -Msmartralloc=huge:896 -Mfprelaxed -Mconcur --zc_eh
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Fortran benchmarks:

```
-fantsse -Mfprelaxed -Msmartralloc=huge:896 -Mconcur -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	19.2
IBM BladeCenter LS22 (AMD Opteron 2356)	SPECfp_base2006 =	18.2
CPU2006 license: 11	Test date:	Aug-2008
Test sponsor: IBM Corporation	Hardware Availability:	Sep-2008
Tested by: IBM Corporation	Software Availability:	May-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-fastsse -Msmartralloc=huge:896 -Mconcur -Mfprelaxed -Mipa=fast  
-Mipa=inline -tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:

```
-Mipa=jobs:8
```

C++ benchmarks:

```
-Mipa=jobs:8
```

Fortran benchmarks:

```
-Mipa=jobs:8
```

Benchmarks using both Fortran and C:

```
-Mipa=jobs:8
```

Peak Compiler Invocation

C benchmarks:

```
pgcc
```

C++ benchmarks:

```
pgcpp
```

Fortran benchmarks:

```
pgf95
```

Benchmarks using both Fortran and C:

```
pgcc pgf95
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -Mnomain  
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
450.soplex: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 19.2

IBM BladeCenter LS22 (AMD Opteron 2356)

SPECfp_base2006 = 18.2

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: May-2008

Peak Portability Flags (Continued)

```

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartralloc=huge:896 -Msafeptr -Mconcur
           -Mfprelaxed -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr
           -Mipa=shape -tp barcelona-64 -Bstatic_pgi

470.lbm: -fastsse -Msmartralloc=huge:896 -Mprefetch=t0 -Mloop32
           -Mfprelaxed -Mipa=fast -Mipa=inline -tp barcelona-64
           -Bstatic_pgi

482.sphinx3: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
              -Mipa=inline(pass 2) -fastsse -Mfprelaxed -Msmartralloc
              -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
           -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
           -Msmartralloc=huge:896 -Mnodepchk -Mfprelaxed --zc_eh
           -tp barcelona-64 -Bstatic_pgi

447.dealII: -fastsse -alias=ansi -Msmartralloc=huge:896 -Mprefetch=t0
            -Mvect -Mfprelaxed --zc_eh -Mipa=fast -Mipa=inline
            -tp barcelona-32 -Bstatic_pgi

450.soplex: basepeak = yes

453.povray: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
            -Mipa=fast(pass 2) -Mipa=inlinenopfo:3(pass 2)
            -Mipa=staticfunc(pass 2) -fastsse -Msmartralloc=huge:896
            -Mprefetch=t0 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

```

Fortran benchmarks:

```

410.bwaves: -fastsse -Msmartralloc -Mprefetch=distance:12 -Mprefetch=nta
            -Mconcur -Mloop32 -Mpre -Mfprelaxed -Mipa=fast
            -Mipa=inline -tp barcelona-64 -Bstatic_pgi

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 19.2

IBM BladeCenter LS22 (AMD Opteron 2356)

SPECfp_base2006 = 18.2

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: May-2008

Peak Optimization Flags (Continued)

416.gamess: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -fastsse -Mvect=noaltcode
 -Mprefetch=t0 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

434.zeusmp: basepeak = yes

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mconcur=noaltcode(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -fastsse -Mvect=fuse
 -Msmaralloc=huge:896 -Mprefetch=distance:8 -Mprefetch=t0
 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: basepeak = yes

465.tonto: -fastsse -O4 -Mvect=noaltcode -Msmaralloc=huge:896
 -Mprefetch=distance:8 -Mprefetch=t0 -Mfprelaxed -Mipa=fast
 -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

435.gromacs: -fastsse -Msmaralloc=huge:896 -Mfprelaxed -Mconcur
 -Mfpapprox=rsqrt -Mipa=fast -Mipa=inline -tp barcelona-64
 -Bstatic_pgi

436.cactusADM: -fastsse -Msmaralloc=huge:896 -Mfprelaxed -Mconcur -Mdse
 -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
 -Msmaralloc=huge:896 -Mloop32 -Mprefetch=t0 -Mpre
 -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmaralloc
 -Mprefetch=distance:8 -Mconcur=noaltcode -Mfprelaxed
 -tp barcelona-64 -Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs:8(pass 2)

C++ benchmarks:

-Mipa=jobs:8(pass 2)

Fortran benchmarks:

-Mipa=jobs:8

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 19.2

IBM BladeCenter LS22 (AMD Opteron 2356)

SPECfp_base2006 = 18.2

CPU2006 license: 11

Test date: Aug-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: May-2008

Peak Other Flags (Continued)

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs : 8(pass 2)

481.wrf: No flags used

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/pgi72_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 19:17:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 September 2008.