



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint®2006 = 30.2**

**IBM System x3650 (Intel Xeon X5470)**

**SPECint\_base2006 = 26.3**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation


**Tested by:** IBM Corporation

**Test date:**

Sep-2008

**Hardware Availability:** Nov-2008

**Software Availability:** Nov-2008

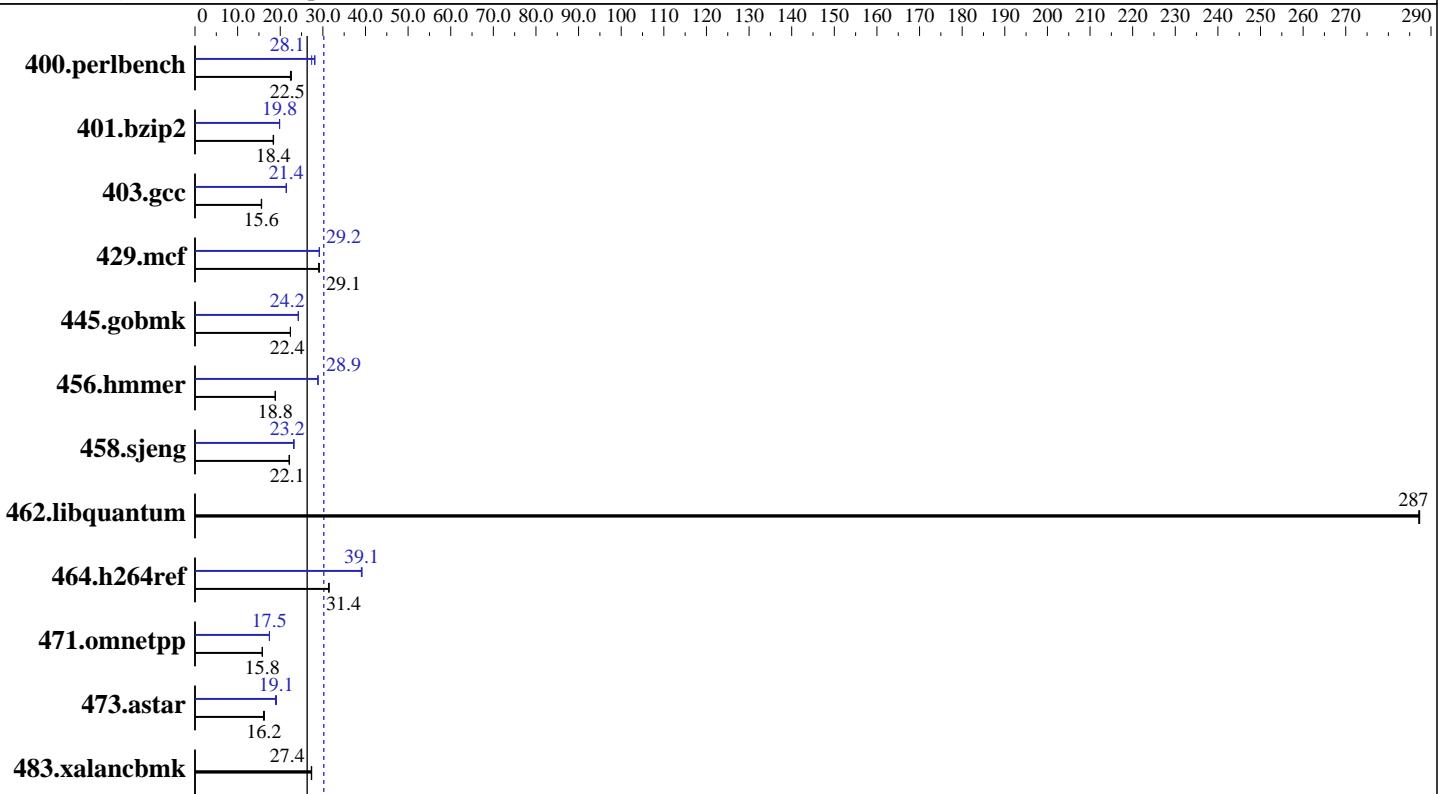

## Hardware

CPU Name:	Intel Xeon X5470
CPU Characteristics:	1333MHz system bus
CPU MHz:	3333
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem:	1 x 36 GB SAS, 15000 RPM
Other Hardware:	None

## Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint2006 = 30.2**

IBM System x3650 (Intel Xeon X5470)

**SPECint\_base2006 = 26.3**

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	436	22.4	<b>435</b>	<b>22.5</b>	432	22.6	347	28.1	357	27.4	<b>348</b>	<b>28.1</b>
401.bzip2	523	18.4	<b>525</b>	<b>18.4</b>	526	18.4	487	19.8	<b>486</b>	<b>19.8</b>	486	19.9
403.gcc	517	15.6	515	15.6	<b>516</b>	<b>15.6</b>	<b>376</b>	<b>21.4</b>	375	21.5	376	21.4
429.mcf	314	29.0	<b>313</b>	<b>29.1</b>	313	29.1	312	29.2	313	29.1	<b>312</b>	<b>29.2</b>
445.gobmk	<b>469</b>	<b>22.4</b>	468	22.4	469	22.4	<b>433</b>	<b>24.2</b>	433	24.3	433	24.2
456.hmmer	495	18.8	<b>495</b>	<b>18.8</b>	495	18.8	324	28.8	<b>323</b>	<b>28.9</b>	323	28.9
458.sjeng	546	22.1	547	22.1	<b>547</b>	<b>22.1</b>	<b>521</b>	<b>23.2</b>	523	23.1	521	23.2
462.libquantum	<b>72.1</b>	<b>287</b>	72.1	287	72.2	287	<b>72.1</b>	<b>287</b>	72.1	287	<b>72.2</b>	<b>287</b>
464.h264ref	<b>705</b>	<b>31.4</b>	703	31.5	705	31.4	<b>566</b>	<b>39.1</b>	567	39.0	565	39.2
471.omnetpp	395	15.8	<b>395</b>	<b>15.8</b>	397	15.8	358	17.5	<b>358</b>	<b>17.5</b>	358	17.5
473.astar	437	16.1	<b>435</b>	<b>16.2</b>	431	16.3	368	19.1	372	18.9	<b>368</b>	<b>19.1</b>
483.xalancbmk	252	27.4	<b>252</b>	<b>27.4</b>	253	27.3	252	27.4	<b>252</b>	<b>27.4</b>	253	27.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode

OMP\_NUM\_THREADS set to number of processors

KMP\_AFFINITY set to "physical,0"

Hardware Prefetch Enabled, Adjacent Sector Prefetch Enabled

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint2006 = 30.2**

IBM System x3650 (Intel Xeon X5470)

**SPECint\_base2006 = 26.3**

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

## Base Optimization Flags

C benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include
```

```
456.hmmr: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include
```

C++ benchmarks:

```
icpc
```

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmr: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

<b>IBM Corporation</b>	<b>SPECint2006 =</b>	<b>30.2</b>
<b>IBM System x3650 (Intel Xeon X5470)</b>	<b>SPECint_base2006 =</b>	<b>26.3</b>
<b>CPU2006 license:</b> 11	<b>Test date:</b>	Sep-2008
<b>Test sponsor:</b> IBM Corporation	<b>Hardware Availability:</b>	Nov-2008
<b>Tested by:</b> IBM Corporation	<b>Software Availability:</b>	Nov-2008

## Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
                   -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
                   -no-prec-div -static -auto-ilp32 -opt-prefetch  
                   -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc  
                   -opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo  
                   -no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll12  
                   -ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
                   -no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
                   -no-prec-div -static -unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
                   -no-prec-div -ansi-alias -opt-ra-region-strategy=block  
                   -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
                   -no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
                   -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.03.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.04.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint2006 = 30.2**

IBM System x3650 (Intel Xeon X5470)

**SPECint\_base2006 = 26.3**

**CPU2006 license:** 11

**Test date:** Sep-2008

**Test sponsor:** IBM Corporation

**Hardware Availability:** Nov-2008

**Tested by:** IBM Corporation

**Software Availability:** Nov-2008

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.03.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.04.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 21:01:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 October 2008.