



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8200EX (Intel Xeon X5570, 2.93 GHz)

SPECfp[®]_rate2006 = 177

SPECfp_rate_base2006 = 169

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Feb-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

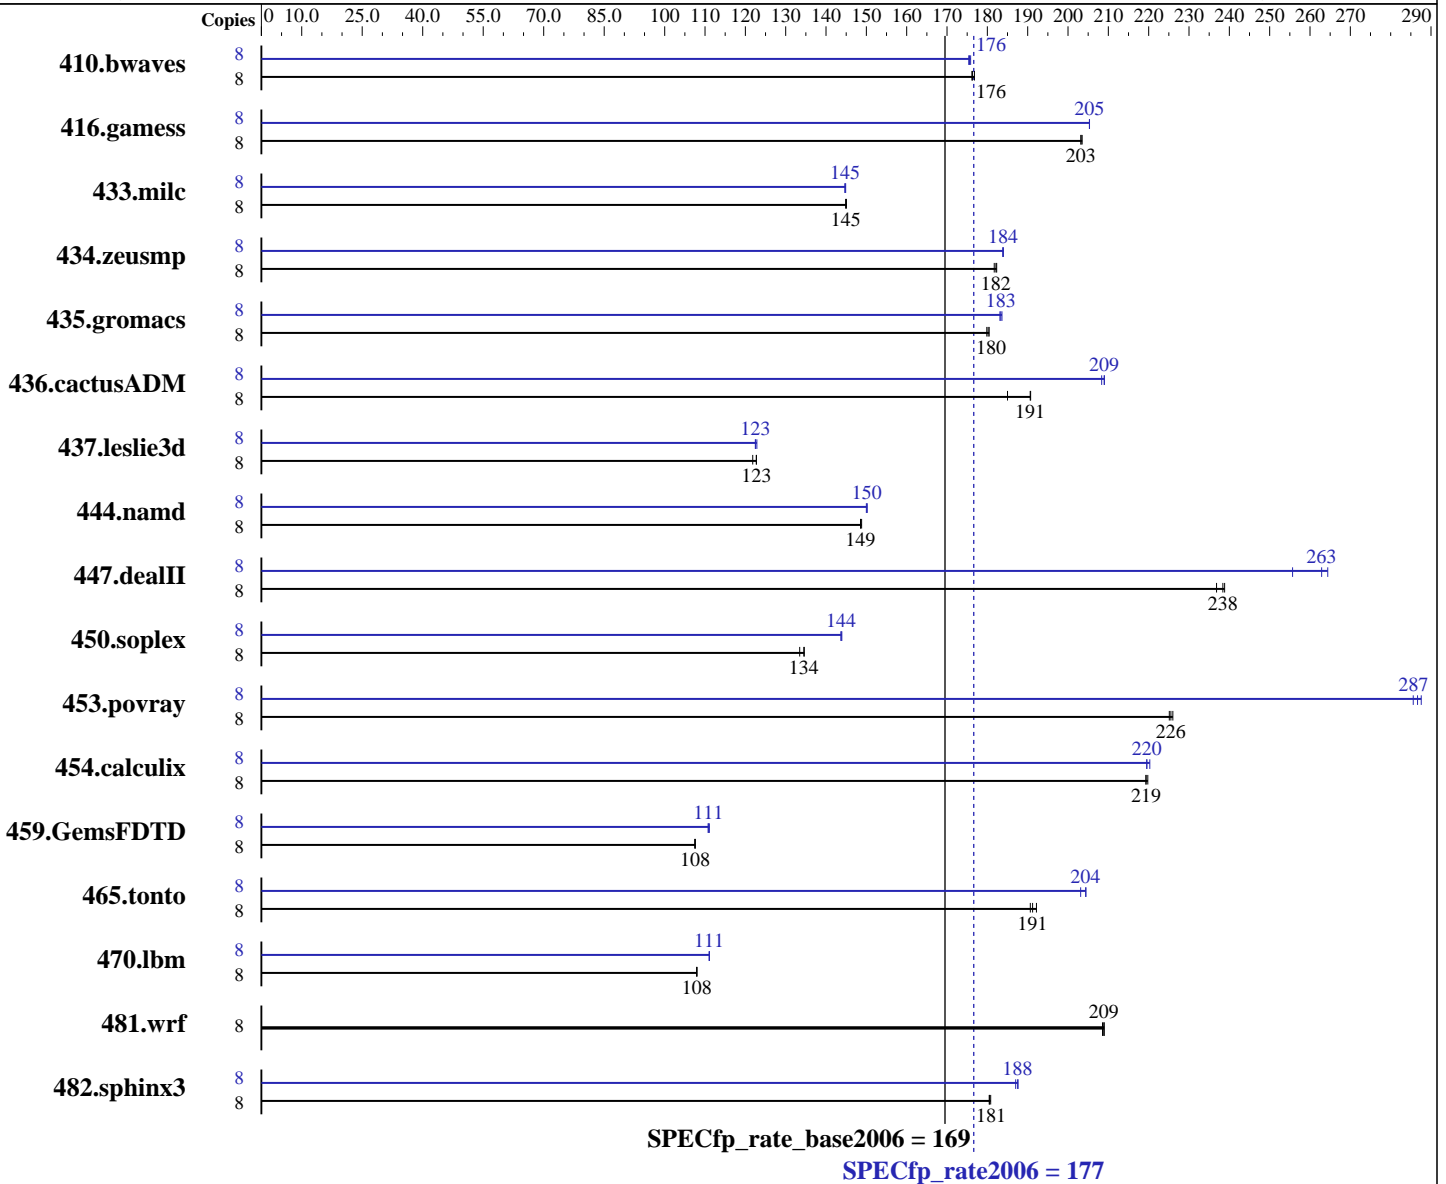

Hardware

CPU Name: Intel Xeon X5570
 CPU Characteristics: Quad Core, 2.93 GHz
 Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2934
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2,
 Kernel 2.6.16.60-0.30-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux
 Build 20090131 Package ID: l_cproc_p_11.0.080,
 l_cprof_p_11.0.080
 Auto Parallel: No
 File System: NFSv3 IPoIB
 System State: Multi-user, run level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8200EX (Intel Xeon X5570, 2.93 GHz)

SPECfp_rate2006 = 177

SPECfp_rate_base2006 = 169

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Feb-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12*4GB DDR3-1066 CL7 RDIMMs)
Disk Subsystem: 7 TB RAID 5
48 x 147 GB SAS (Seagate Cheetah 15000 rpm)
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: SGI ProPack 6 for Linux Service Pack 2
Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	617	176	615	177	617	176	8	620	175	618	176	619	176
416.gamess	8	770	204	771	203	771	203	8	763	205	763	205	763	205
433.milc	8	507	145	507	145	506	145	8	508	145	507	145	507	145
434.zeusmp	8	401	182	399	182	400	182	8	396	184	396	184	396	184
435.gromacs	8	318	180	317	180	317	180	8	311	184	312	183	312	183
436.cactusADM	8	517	185	502	191	501	191	8	459	208	457	209	457	209
437.leslie3d	8	617	122	613	123	613	123	8	614	122	612	123	614	123
444.namd	8	431	149	432	149	432	149	8	427	150	428	150	427	150
447.dealII	8	386	237	384	238	383	239	8	348	263	346	264	358	256
450.soplex	8	496	134	500	133	496	135	8	464	144	464	144	464	144
453.povray	8	188	226	189	226	189	225	8	148	288	148	287	149	286
454.calculix	8	301	219	300	220	301	219	8	300	220	301	220	301	220
459.GemsFDTD	8	790	107	789	108	789	108	8	766	111	766	111	764	111
465.tonto	8	410	192	412	191	413	191	8	385	204	385	204	388	203
470.lbm	8	1018	108	1018	108	1018	108	8	990	111	990	111	989	111
481.wrf	8	428	209	428	209	428	209	8	428	209	428	209	428	209
482.sphinx3	8	862	181	864	180	864	181	8	831	188	832	188	834	187

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8200EX (Intel Xeon X5570,
2.93 GHz)

SPECfp_rate2006 = 177

SPECfp_rate_base2006 = 169

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Feb-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8200EX (Intel Xeon X5570, 2.93 GHz)

SPECfp_rate2006 = 177

SPECfp_rate_base2006 = 169

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Feb-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

Peak Compiler Invocation (Continued)

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc`

450.soplex: `icpc -m32`

Fortran benchmarks (except as noted below):

`ifort`

437.leslie3d: `ifort -m32`

Benchmarks using both Fortran and C:

`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
 416.gamess: `-DSPEC_CPU_LP64`
 433.milc: `-DSPEC_CPU_LP64`
 434.zeusmp: `-DSPEC_CPU_LP64`
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
 444.namd: `-DSPEC_CPU_LP64`
 447.deallI: `-DSPEC_CPU_LP64`
 453.povray: `-DSPEC_CPU_LP64`
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
 459.GemsFDTD: `-DSPEC_CPU_LP64`
 465.tonto: `-DSPEC_CPU_LP64`
 470.lbm: `-DSPEC_CPU_LP64`
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias`

470.lbm: `-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8200EX (Intel Xeon X5570,
2.93 GHz)

SPECfp_rate2006 = 177

SPECfp_rate_base2006 = 169

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Feb-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix ICE 8200EX (Intel Xeon X5570,
2.93 GHz)

SPECfp_rate2006 = 177

SPECfp_rate_base2006 = 169

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Feb-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:32:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 March 2009.