



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

**SPECint<sup>®</sup>2006 = 22.0**

Motherboard H8DMT-INF+, AMD Opteron 2389

**SPECint\_base2006 = 18.1**

CPU2006 license: 001176


Test date: Apr-2009

Test sponsor: Supermicro

Hardware Availability: Nov-2008

Tested by: Supermicro

Software Availability: Jun-2008

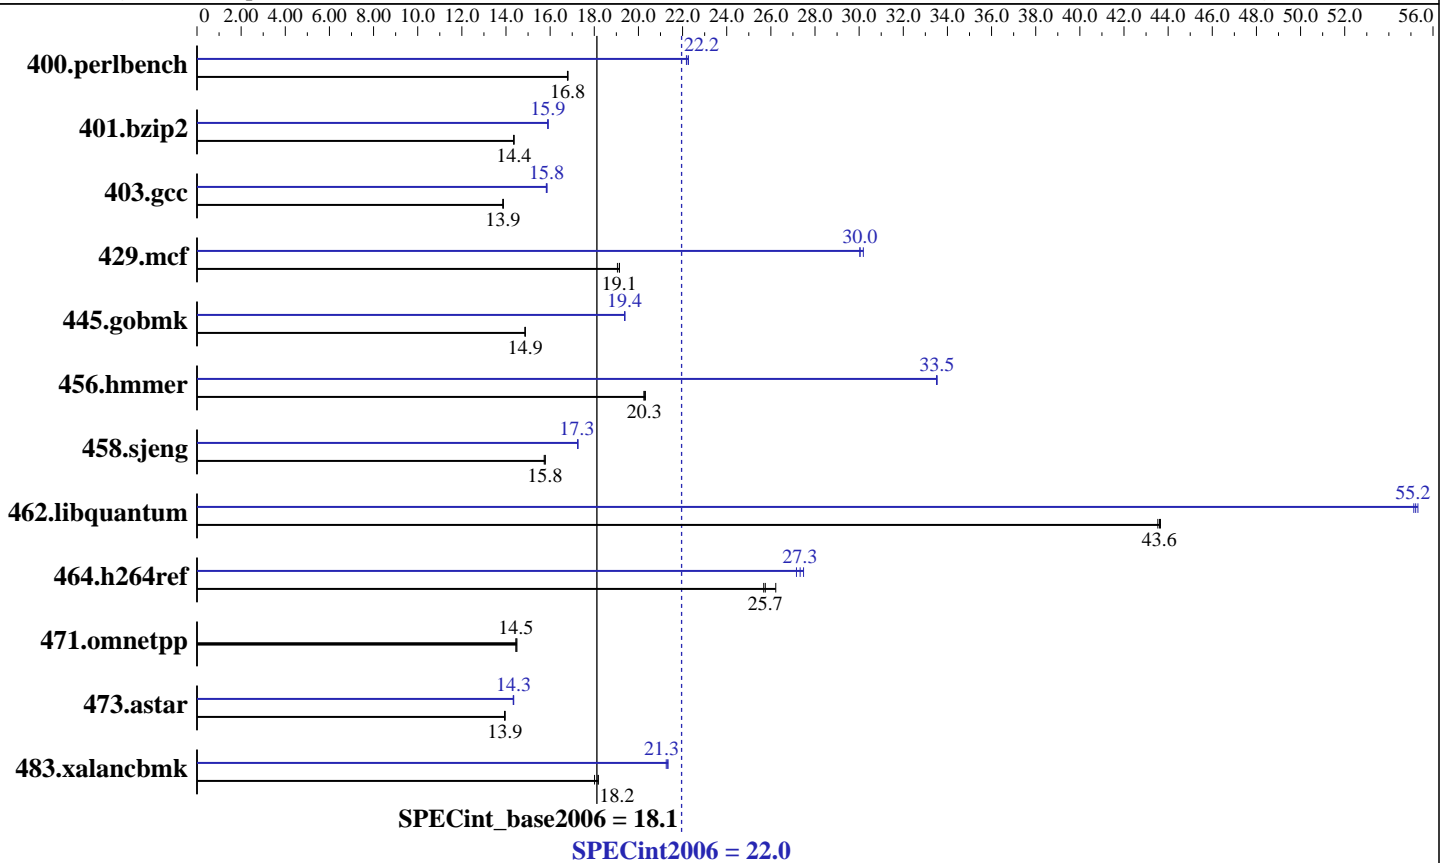

### Hardware

CPU Name: AMD Opteron 2389  
 CPU Characteristics:  
 CPU MHz: 2900  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18 32-bit and 64-bit libhugetlbfs libraries Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECint2006 = **22.0**

Motherboard H8DMT-INF+, AMD Opteron 2389

SPECint\_base2006 = **18.1**

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Apr-2009  
Hardware Availability: Nov-2008  
Software Availability: Jun-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	582	16.8	581	16.8	<b>582</b>	<b>16.8</b>	441	22.2	439	22.3	<b>440</b>	<b>22.2</b>
401.bzip2	672	14.4	<b>672</b>	<b>14.4</b>	672	14.4	<b>607</b>	<b>15.9</b>	607	15.9	607	15.9
403.gcc	581	13.9	580	13.9	<b>580</b>	<b>13.9</b>	508	15.9	509	15.8	<b>508</b>	<b>15.8</b>
429.mcf	476	19.1	<b>477</b>	<b>19.1</b>	479	19.0	302	30.2	304	30.0	<b>304</b>	<b>30.0</b>
445.gobmk	705	14.9	<b>705</b>	<b>14.9</b>	706	14.9	541	19.4	541	19.4	<b>541</b>	<b>19.4</b>
456.hammer	461	20.2	459	20.3	<b>460</b>	<b>20.3</b>	<b>278</b>	<b>33.5</b>	278	33.5	278	33.5
458.sjeng	<b>767</b>	<b>15.8</b>	769	15.7	767	15.8	<b>701</b>	<b>17.3</b>	701	17.3	702	17.2
462.libquantum	475	43.7	476	43.5	<b>475</b>	<b>43.6</b>	375	55.3	376	55.1	<b>375</b>	<b>55.2</b>
464.h264ref	<b>859</b>	<b>25.7</b>	862	25.7	844	26.2	<b>810</b>	<b>27.3</b>	805	27.5	815	27.2
471.omnetpp	<b>432</b>	<b>14.5</b>	431	14.5	432	14.5	<b>432</b>	<b>14.5</b>	431	14.5	432	14.5
473.astar	<b>503</b>	<b>13.9</b>	504	13.9	503	14.0	<b>489</b>	<b>14.3</b>	490	14.3	489	14.3
483.xalancbmk	<b>380</b>	<b>18.2</b>	383	18.0	379	18.2	323	21.3	<b>324</b>	<b>21.3</b>	325	21.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores

## Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=7168 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_MORECORE = "yes"

LD\_LIBRARY\_PATH = "/usr/cpu2006/amd909gh-libs/64:/usr/cpu2006/amd909gh-libs/32"

Tested system can be built with CSE-808T-980(B/V) Revision A4.

Product description can be obtained at

<http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DMT-INF+.cfm>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECint2006 = 22.0**

Motherboard H8DMT-INF+, AMD Opteron 2389

**SPECint\_base2006 = 18.1**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Apr-2009  
**Hardware Availability:** Nov-2008  
**Software Availability:** Jun-2008

## Base Compiler Invocation

C benchmarks:  
pgcc  
  
C++ benchmarks:  
pgcpp

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi  
  
C++ benchmarks:  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc\_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic\_pgi

## Base Other Flags

C benchmarks:  
-Mipa=jobs:4  
  
C++ benchmarks:  
-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):  
pathcc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 22.0

Motherboard H8DMT-INF+, AMD Opteron 2389

SPECint\_base2006 = 18.1

CPU2006 license: 001176

Test date: Apr-2009

Test sponsor: Supermicro

Hardware Availability: Nov-2008

Tested by: Supermicro

Software Availability: Jun-2008

## Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmcr: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000  
 -IPA:field\_reorder=on -LNO:opt=0 -WOPT:if\_conv=0  
 -CG:local\_sched\_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast  
 -OPT:goto=off -INLINE:aggressive=on -CG:local\_sched\_alg=1  
 -m3dnow  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
 -L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=1  
 -LNO:trip\_count=256 -LNO:prefetch\_ahead=10  
 -CG:prefer\_lru\_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
 -L/usr/lib -lhugetlbfs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint2006 = 22.0

Motherboard H8DMT-INF+, AMD Opteron 2389

SPECint\_base2006 = 18.1

CPU2006 license: 001176

Test date: Apr-2009

Test sponsor: Supermicro

Hardware Availability: Nov-2008

Tested by: Supermicro

Software Availability: Jun-2008

## Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict  
 -LNO:prefetch=1 -LNO:ignore\_feedback=off -CG:p2align=on

456.hmmcr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial  
 -Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0  
 -Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline  
 -tp barcelona-64 -Bstatic\_pgi

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa  
 -LNO:ignore\_feedback=off -LNO:full\_unroll=10 -LNO:fusion=0  
 -LNO:fission=2 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
 -OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8  
 -Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed  
 -Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64  
 -Bstatic\_pgi

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000  
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
 -CG:push\_pop\_int\_saved\_regs=off -CG:prefer\_lru\_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse  
 -O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed  
 --zc\_eh -tp barcelona-32 -Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
 -L/root/work/libraries/SmartHeap\_8.1/lib -lsmarheap

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECint2006 = 22.0**

Motherboard H8DMT-INF+, AMD Opteron 2389

**SPECint\_base2006 = 18.1**

**CPU2006 license:** 001176

**Test date:** Apr-2009

**Test sponsor:** Supermicro

**Hardware Availability:** Nov-2008

**Tested by:** Supermicro

**Software Availability:** Jun-2008

## Peak Other Flags (Continued)

456.hmmmer: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):  
-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.html](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html)

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.xml](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 00:35:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 June 2009.