



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp<sup>®</sup>\_rate2006 = 83.9

Servidor Itaotec MX203 (Intel Xeon E5520)

SPECfp\_rate\_base2006 = 81.8

CPU2006 license: 9001


Test date: Dec-2009

Test sponsor: Itaotec

Hardware Availability: Mar-2009

Tested by: Itaotec

Software Availability: Feb-2009

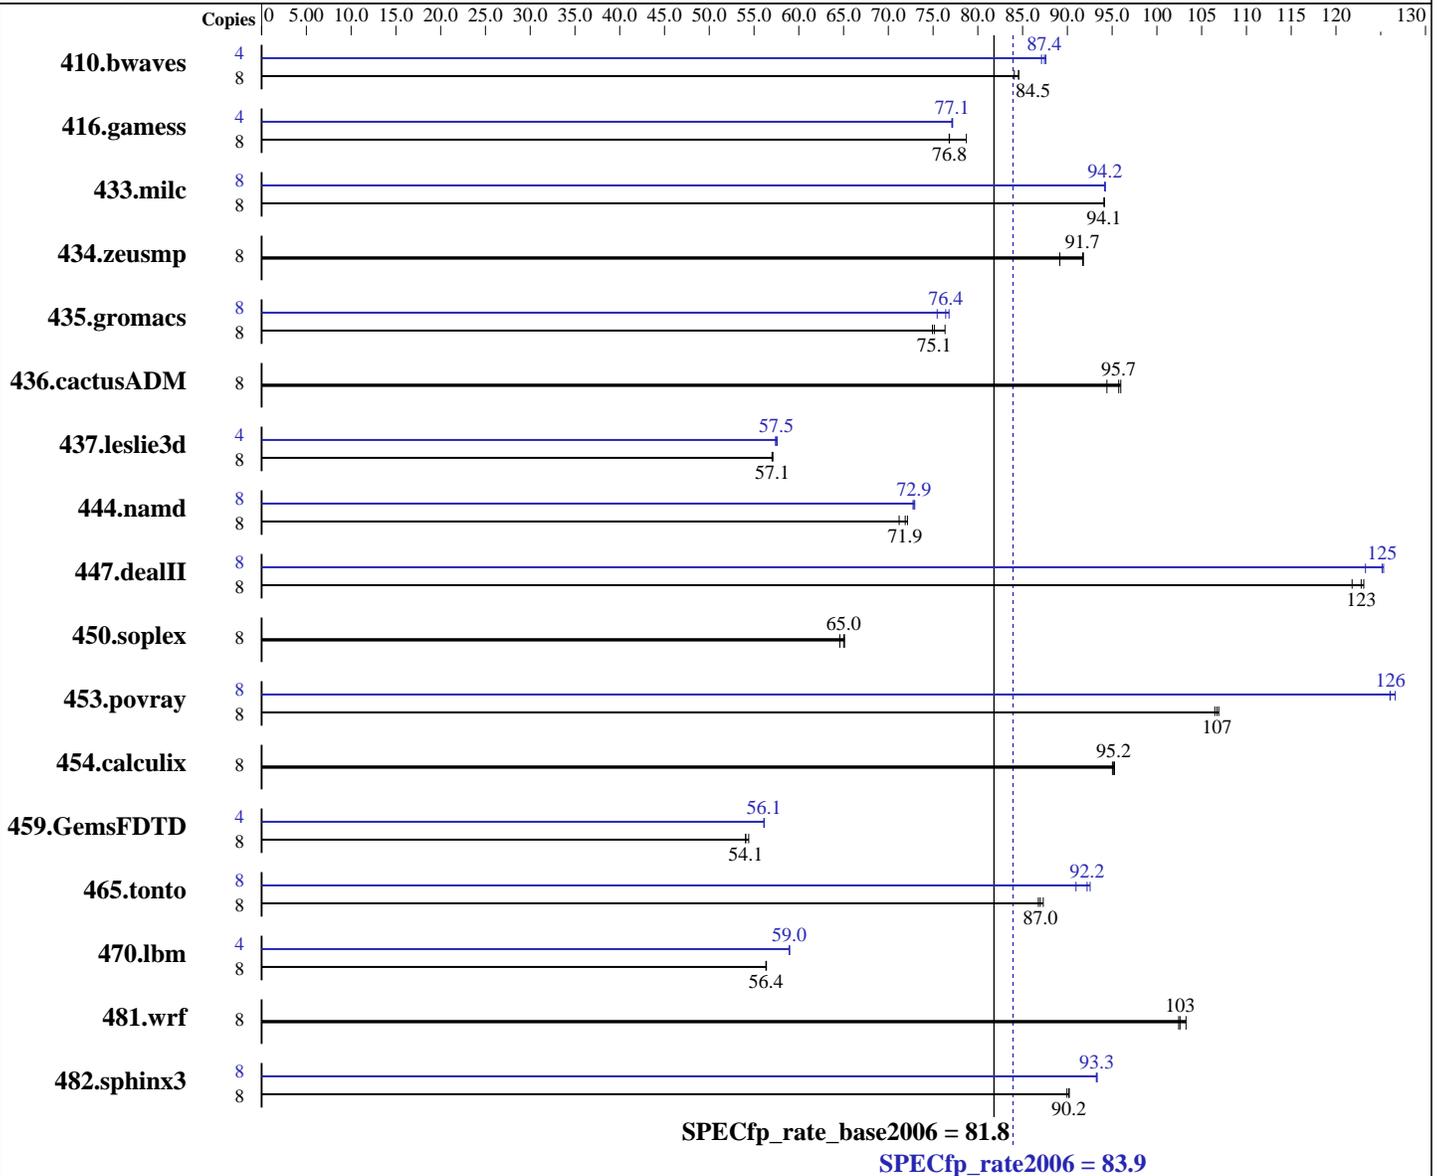

### Hardware

CPU Name: Intel Xeon E5520  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp  
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.081, l\_cprof\_p\_11.0.081  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp\_rate2006 = 83.9

Servidor Itautec MX203 (Intel Xeon E5520)

SPECfp\_rate\_base2006 = 81.8

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Dec-2009  
Hardware Availability: Mar-2009  
Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 12 GB (3 x 4GB DDR3-1066, CL 7, ECC)  
Disk Subsystem: 1 x 160 GB SATA-2, 7200RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1286	84.6	<u>1286</u>	<u>84.5</u>	1293	84.1	4	624	87.1	621	87.6	<u>622</u>	<u>87.4</u>
416.gamess	8	<u>2039</u>	<u>76.8</u>	2040	76.8	1990	78.7	4	1016	77.1	1015	77.2	<u>1015</u>	<u>77.1</u>
433.milc	8	<u>780</u>	<u>94.1</u>	780	94.1	780	94.1	8	779	94.2	780	94.2	<u>780</u>	<u>94.2</u>
434.zeusmp	8	<u>794</u>	<u>91.7</u>	793	91.8	817	89.2	8	<u>794</u>	<u>91.7</u>	793	91.8	817	89.2
435.gromacs	8	748	76.3	762	74.9	<u>760</u>	<u>75.1</u>	8	<u>748</u>	<u>76.4</u>	744	76.8	757	75.5
436.cactusADM	8	1013	94.4	996	96.0	<u>999</u>	<u>95.7</u>	8	1013	94.4	996	96.0	<u>999</u>	<u>95.7</u>
437.leslie3d	8	1317	57.1	<u>1318</u>	<u>57.1</u>	1319	57.0	4	655	57.4	653	57.6	<u>654</u>	<u>57.5</u>
444.namd	8	<u>893</u>	<u>71.9</u>	889	72.1	901	71.2	8	879	73.0	<u>881</u>	<u>72.9</u>	882	72.8
447.dealII	8	743	123	<u>745</u>	<u>123</u>	751	122	8	742	123	<u>731</u>	<u>125</u>	730	125
450.soplex	8	1033	64.6	<u>1026</u>	<u>65.0</u>	1025	65.1	8	1033	64.6	<u>1026</u>	<u>65.0</u>	1025	65.1
453.povray	8	398	107	400	106	<u>399</u>	<u>107</u>	8	<u>338</u>	<u>126</u>	338	126	336	127
454.calculix	8	694	95.0	693	95.3	<u>693</u>	<u>95.2</u>	8	694	95.0	693	95.3	<u>693</u>	<u>95.2</u>
459.GemsFDTD	8	1560	54.4	1570	54.1	<u>1570</u>	<u>54.1</u>	4	756	56.1	<u>756</u>	<u>56.1</u>	756	56.1
465.tonto	8	907	86.8	902	87.3	<u>905</u>	<u>87.0</u>	8	865	91.0	<u>854</u>	<u>92.2</u>	851	92.5
470.lbm	8	1949	56.4	<u>1951</u>	<u>56.4</u>	1951	56.3	4	933	58.9	<u>932</u>	<u>59.0</u>	932	59.0
481.wrf	8	865	103	872	102	<u>871</u>	<u>103</u>	8	865	103	872	102	<u>871</u>	<u>103</u>
482.sphinx3	8	1733	90.0	1729	90.2	<u>1729</u>	<u>90.2</u>	8	<u>1671</u>	<u>93.3</u>	1671	93.3	1672	93.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## General Notes

This result was measured on the Servidor Itautec MX223.  
The Servidor Itautec MX203 and the Servidor Itautec MX223 are electronically equivalent.  
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp\_rate2006 = 83.9

Servidor Itautec MX203 (Intel Xeon E5520)

SPECfp\_rate\_base2006 = 81.8

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Dec-2009  
Hardware Availability: Mar-2009  
Software Availability: Feb-2009

## Base Compiler Invocation

C benchmarks:  
icc  
C++ benchmarks:  
icpc  
Fortran benchmarks:  
ifort  
Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static  
Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static  
Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 83.9

Servidor Itaotec MX203 (Intel Xeon E5520)

SPECfp\_rate\_base2006 = 81.8

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Dec-2009  
Hardware Availability: Mar-2009  
Software Availability: Feb-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks:

icpc

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 83.9

Servidor Itaotec MX203 (Intel Xeon E5520)

SPECfp\_rate\_base2006 = 81.8

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Dec-2009  
Hardware Availability: Mar-2009  
Software Availability: Feb-2009

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 83.9

Servidor Itaotec MX203 (Intel Xeon E5520)

SPECfp\_rate\_base2006 = 81.8

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Dec-2009  
Hardware Availability: Mar-2009  
Software Availability: Feb-2009

## Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-ic11.0-fp-linux64-revI.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-ic11.0-fp-linux64-revI.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 04:00:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 December 2009.