




# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX150 S7, Intel Core i3-530, 2.93 GHz

**SPECfp®2006 = 29.9**

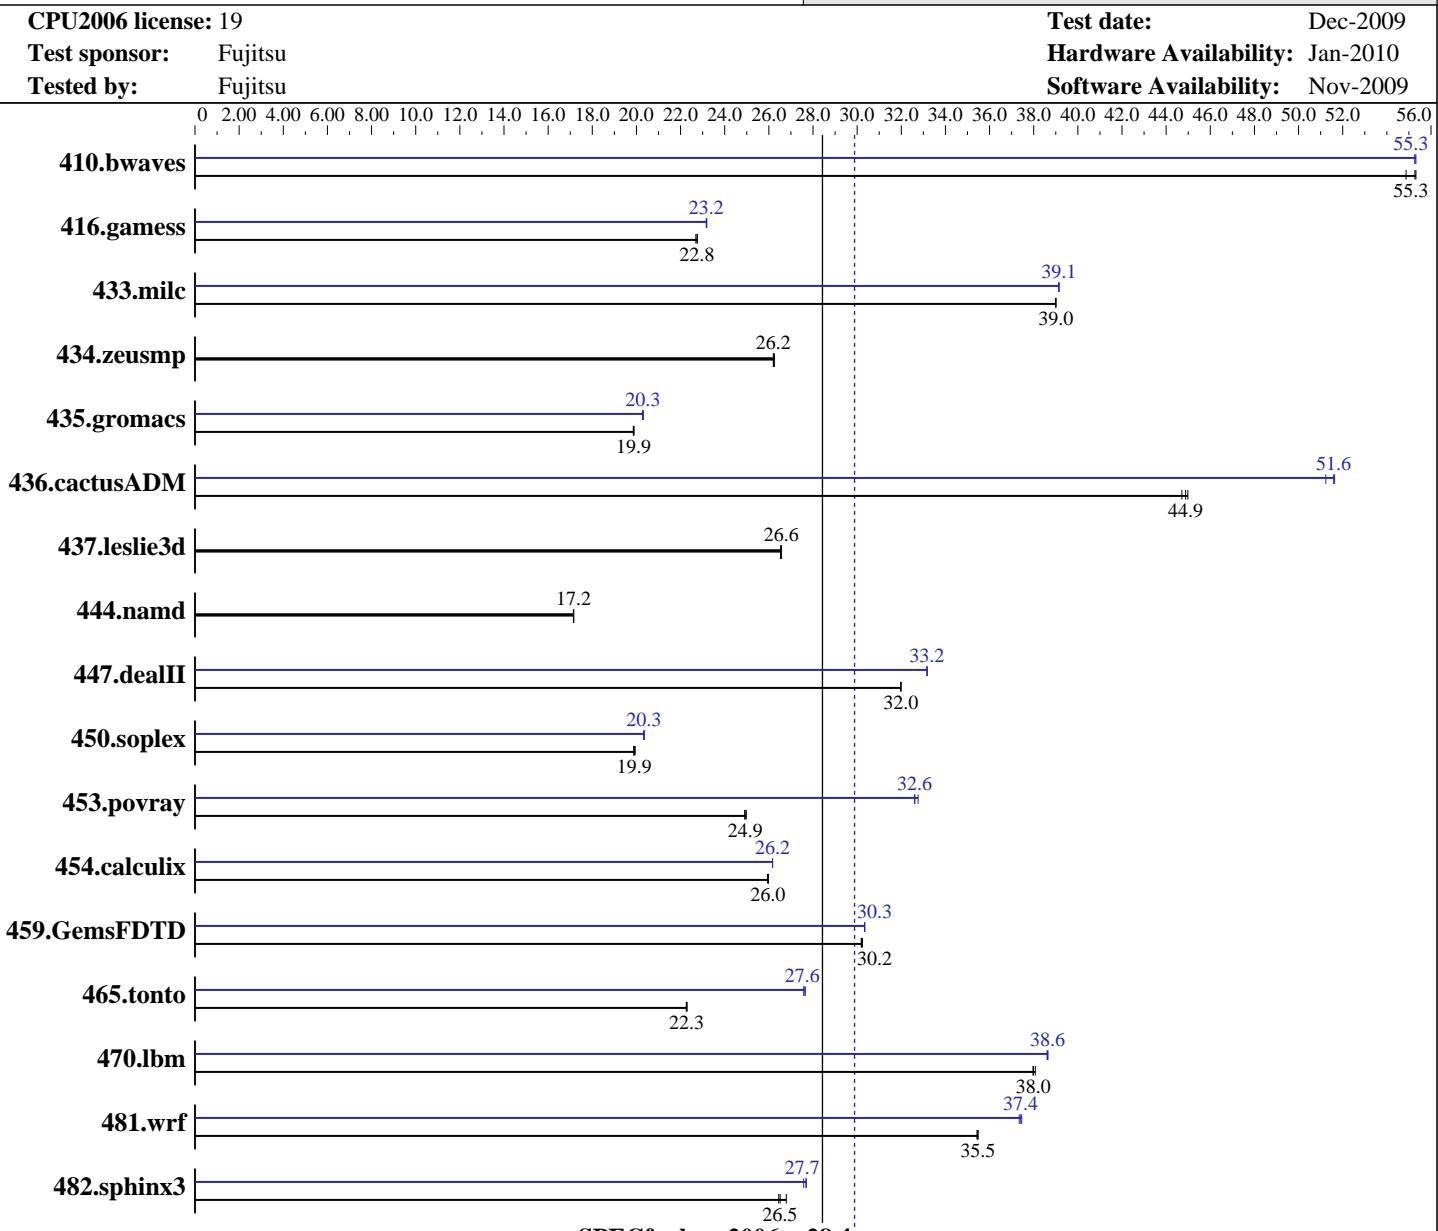

## Hardware

CPU Name: Intel Core i3-530  
CPU Characteristics:  
CPU MHz: 2933  
FPU: Integrated  
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-smp  
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091012 Package ID: l\_cproc\_p\_11.1.059, l\_cprof\_p\_11.1.059  
Auto Parallel: Yes  
File System: ext3  
System State: Multi-User Run Level 3

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX150 S7, Intel Core i3-530, 2.93 GHz

**SPECfp2006 = 29.9**

CPU2006 license: 19

Test date: Dec-2009

Test sponsor: Fujitsu

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Nov-2009

L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (2x4 GB PC3-10600E, 2 rank, CL9-9-9, ECC)  
 Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	248	54.9	246	55.3	<b>246</b>	<b>55.3</b>	<b>246</b>	<b>55.3</b>	246	55.3	246	55.3
416.gamess	<b>861</b>	<b>22.8</b>	860	22.8	863	22.7	<b>845</b>	<b>23.2</b>	844	23.2	845	23.2
433.milc	235	39.0	<b>235</b>	<b>39.0</b>	235	39.0	<b>235</b>	<b>39.1</b>	<b>235</b>	<b>39.1</b>	235	39.1
434.zeusmp	347	26.3	347	26.2	<b>347</b>	<b>26.2</b>	347	26.3	347	26.2	<b>347</b>	<b>26.2</b>
435.gromacs	359	19.9	360	19.9	<b>359</b>	<b>19.9</b>	<b>352</b>	<b>20.3</b>	352	20.3	352	20.3
436.cactusADM	<b>266</b>	<b>44.9</b>	266	45.0	267	44.7	233	51.2	<b>232</b>	<b>51.6</b>	231	51.6
437.leslie3d	354	26.6	354	26.5	<b>354</b>	<b>26.6</b>	354	26.6	354	26.5	<b>354</b>	<b>26.6</b>
444.namd	468	17.1	467	17.2	<b>468</b>	<b>17.2</b>	468	17.1	467	17.2	<b>468</b>	<b>17.2</b>
447.dealII	358	32.0	<b>358</b>	<b>32.0</b>	358	32.0	345	33.2	<b>345</b>	<b>33.2</b>	345	33.2
450.soplex	418	19.9	<b>419</b>	<b>19.9</b>	420	19.9	<b>410</b>	20.4	410	20.3	<b>410</b>	<b>20.3</b>
453.povray	213	25.0	214	24.9	<b>213</b>	<b>24.9</b>	163	32.6	162	32.8	<b>163</b>	<b>32.6</b>
454.calculix	317	26.0	318	25.9	<b>318</b>	<b>26.0</b>	<b>315</b>	<b>26.2</b>	315	26.2	315	26.2
459.GemsFDTD	351	30.2	<b>351</b>	<b>30.2</b>	351	30.2	350	30.3	350	30.4	<b>350</b>	<b>30.3</b>
465.tonto	441	22.3	<b>442</b>	<b>22.3</b>	442	22.3	356	27.7	<b>357</b>	<b>27.6</b>	357	27.6
470.lbm	361	38.1	<b>362</b>	<b>38.0</b>	362	38.0	<b>356</b>	<b>38.6</b>	356	38.6	356	38.6
481.wrf	315	35.5	<b>315</b>	<b>35.5</b>	315	35.4	299	37.3	<b>299</b>	<b>37.4</b>	298	37.5
482.sphinx3	<b>735</b>	<b>26.5</b>	737	26.4	728	26.8	<b>704</b>	<b>27.7</b>	<b>707</b>	<b>27.6</b>	<b>704</b>	<b>27.7</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## General Notes

OMP\_NUM\_THREADS set to number of cores  
 KMP\_AFFINITY set to granularity=fine,scatter  
 KMP\_STACKSIZE set to 200M  
 For information about Fujitsu please visit: <http://www.fujitsu.com>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX150 S7, Intel Core i3-530, 2.93 GHz

**SPECfp2006 = 29.9**

CPU2006 license: 19

Test date: Dec-2009

Test sponsor: Fujitsu

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Nov-2009

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX150 S7, Intel Core i3-530, 2.93 GHz

**SPECfp2006 = 29.9**

CPU2006 license: 19

Test date: Dec-2009

Test sponsor: Fujitsu

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Nov-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX150 S7, Intel Core i3-530, 2.93 GHz

**SPECfp2006 = 29.9**

CPU2006 license: 19

Test date: Dec-2009

Test sponsor: Fujitsu

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Nov-2009

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll12 -ansi-alias -scalar-rep -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
 -parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll12 -Ob0 -ansi-alias -scalar-rep

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -unroll12 -opt-prefetch -parallel -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX150 S7, Intel Core i3-530, 2.93 GHz

**SPECfp2006 = 29.9**

**SPECfp\_base2006 = 28.4**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Dec-2009

**Hardware Availability:** Jan-2010

**Software Availability:** Nov-2009

## Peak Optimization Flags (Continued)

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revF.20100202.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revF.20100202.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 05:51:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 February 2010.