



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S2, Intel Xeon X5677, 3.46 GHz

SPECint_rate2006 = 300

SPECint_rate_base2006 = 283

CPU2006 license: 19


Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

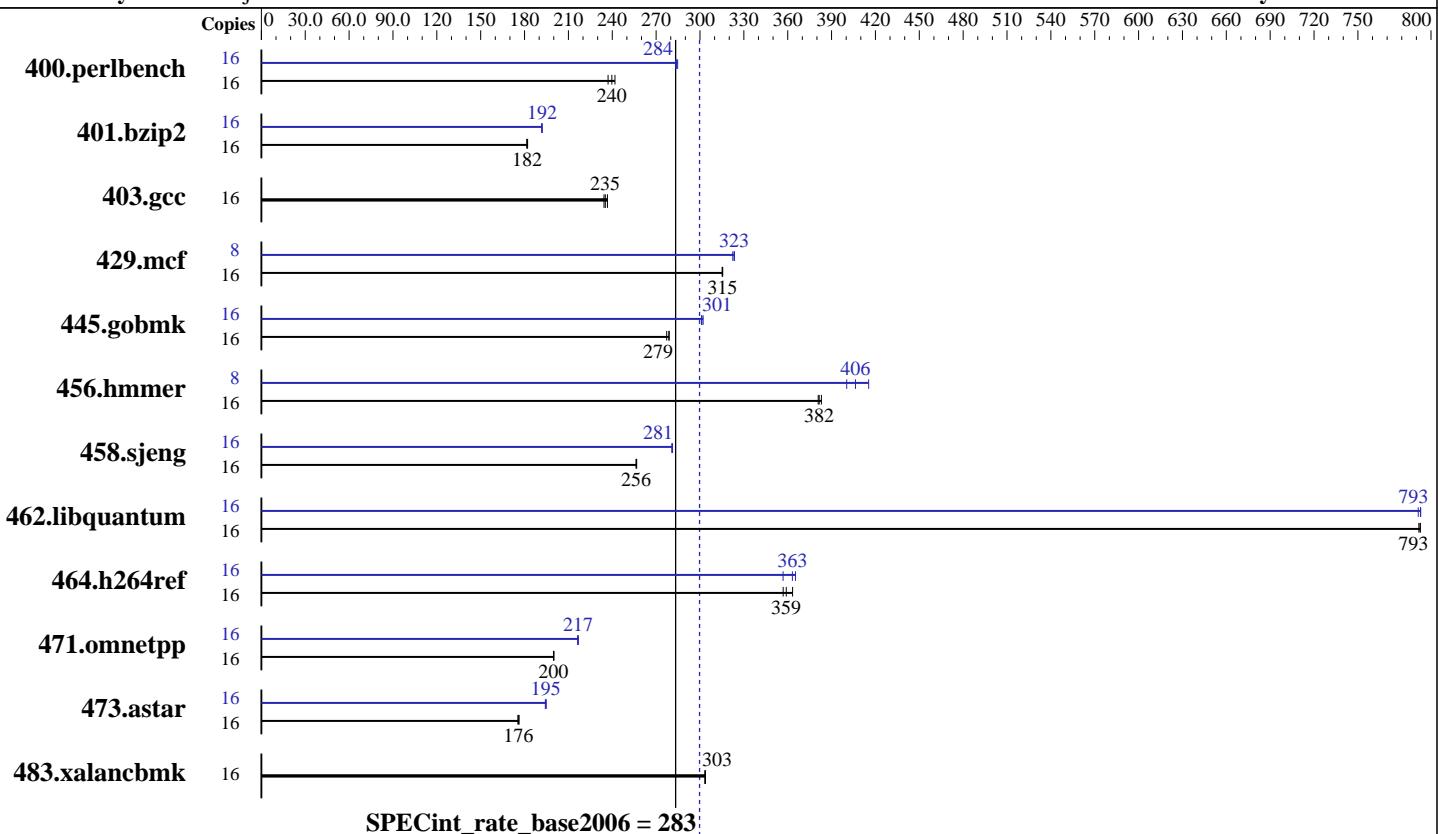

Hardware

CPU Name: Intel Xeon X5677
CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz
CPU MHz: 3467
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC)
Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
Auto Parallel: No
File System: ext3
System State: Multi-User Run Level 3
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S2, Intel Xeon X5677, 3.46 GHz

SPECint_rate2006 = 300

SPECint_rate_base2006 = 283

CPU2006 license: 19

Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	652	240	646	242	659	237	16	552	283	551	284	549	285
401.bzip2	16	849	182	848	182	851	182	16	804	192	804	192	805	192
403.gcc	16	544	237	548	235	550	234	16	544	237	548	235	550	234
429.mcf	16	462	316	463	315	463	315	8	226	323	226	322	225	324
445.gobmk	16	602	279	602	279	605	277	16	557	301	555	302	557	301
456.hmmer	16	392	381	390	383	391	382	8	186	400	184	406	180	415
458.sjeng	16	755	256	755	256	754	257	16	690	281	688	281	689	281
462.libquantum	16	419	792	418	793	418	793	16	419	791	418	793	418	793
464.h264ref	16	975	363	992	357	986	359	16	992	357	975	363	969	365
471.omnetpp	16	501	200	500	200	500	200	16	462	216	462	217	461	217
473.astar	16	637	176	638	176	640	175	16	577	195	578	194	577	195
483.xalancbmk	16	363	304	364	303	364	303	16	363	304	364	303	364	303

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS configuration:
Data Reuse Optimization = Disable
Performance/Power Setting = Traditional

General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S2, Intel Xeon X5677, 3.46 GHz

SPECint_rate2006 = 300

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

401.bzip2: `icc -m64`

456.hmmr: `icc -m64`

458.sjeng: `icc -m64`

462.libquantum: `icc -m64`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S2, Intel Xeon X5677, 3.46 GHz

SPECint_rate2006 = 300

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

SPECint_rate_base2006 = 283

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll14 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S2, Intel Xeon X5677, 3.46 GHz

SPECint_rate2006 = 300

CPU2006 license: 19

Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmpllr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 13:06:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 July 2010.