




# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

BladeSymphony BS2000 (Intel Xeon E5503)

**SPECint®2006 = 21.7**

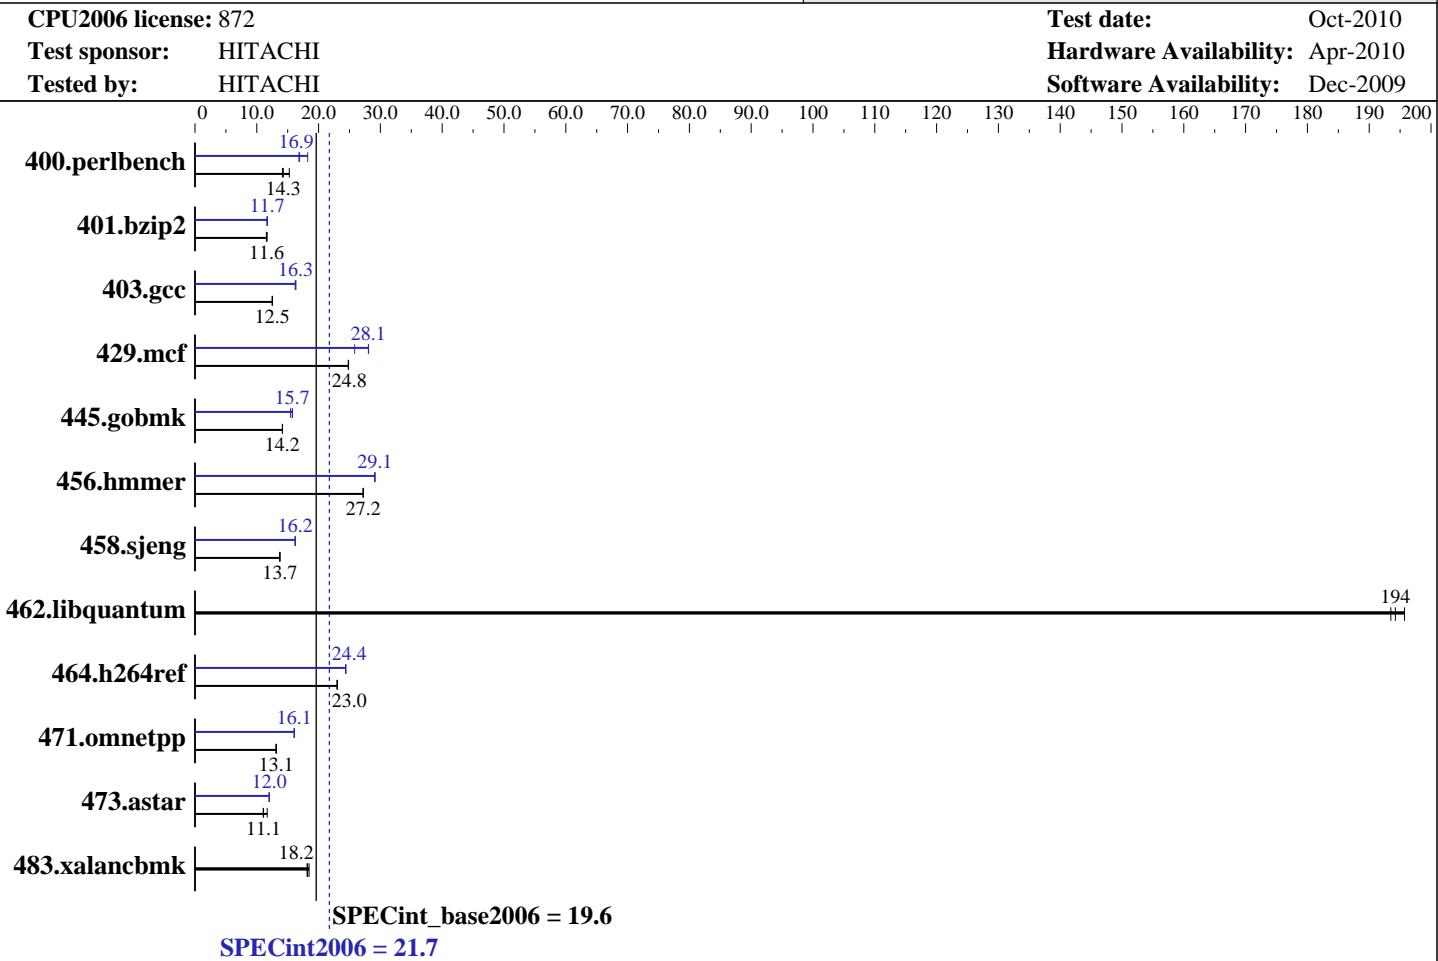

Hardware		Software	
CPU Name:	Intel Xeon E5503	Operating System:	Red Hat Enterprise Linux Server release 5.4.3, Advanced Platform, Kernel 2.6.18-164.9.1.el5 on an x86_64
CPU Characteristics:		Compiler:	Intel C++ Compiler 11.1 for Linux Build 20091012 Package ID: l_cproc_p_11.1.059
CPU MHz:	2000	Auto Parallel:	Yes
FPU:	Integrated	File System:	ext3
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1, 2 chips	Base Pointers:	64-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software:	Microquill SmartHeap V8.1
L3 Cache:	4 MB I+D on chip per chip		
Other Cache:	None		
Memory:	48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 800 MHz)		
Disk Subsystem:	2 x 146 GB 10000 rpm SAS RAID1 configuration		
Other Hardware:	None		



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**HITACHI**

BladeSymphony BS2000 (Intel Xeon E5503)

**SPECint2006 = 21.7**

CPU2006 license: 872

Test date: Oct-2010

Test sponsor: HITACHI

Hardware Availability: Apr-2010

Tested by: HITACHI

Software Availability: Dec-2009

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
400.perlbench	640	15.3	<b>684</b>	<b>14.3</b>	691	14.1	581	16.8	<b>577</b>	<b>16.9</b>	536	18.2
401.bzip2	828	11.7	<b>831</b>	<b>11.6</b>	835	11.6	<b>826</b>	<b>11.7</b>	825	11.7	827	11.7
403.gcc	643	12.5	<b>643</b>	<b>12.5</b>	644	12.5	497	16.2	<b>494</b>	<b>16.3</b>	493	16.3
429.mcf	367	24.8	<b>367</b>	<b>24.8</b>	368	24.8	353	25.8	325	28.1	<b>325</b>	<b>28.1</b>
445.gobmk	742	14.1	741	14.2	<b>741</b>	<b>14.2</b>	665	15.8	678	15.5	<b>666</b>	<b>15.7</b>
456.hammer	<b>343</b>	<b>27.2</b>	343	27.2	343	27.2	320	29.1	<b>321</b>	<b>29.1</b>	321	29.1
458.sjeng	<b>881</b>	<b>13.7</b>	881	13.7	882	13.7	<b>746</b>	<b>16.2</b>	746	16.2	<b>747</b>	16.2
462.libquantum	106	196	107	194	<b>107</b>	<b>194</b>	106	196	107	194	<b>107</b>	<b>194</b>
464.h264ref	<b>961</b>	<b>23.0</b>	963	23.0	961	23.0	907	24.4	<b>907</b>	<b>24.4</b>	908	24.4
471.omnetpp	476	13.1	475	13.1	<b>476</b>	<b>13.1</b>	<b>389</b>	<b>16.1</b>	390	16.0	389	16.1
473.astar	<b>633</b>	<b>11.1</b>	601	11.7	636	11.0	584	12.0	585	12.0	<b>584</b>	<b>12.0</b>
483.xalancbmk	<b>379</b>	<b>18.2</b>	374	18.5	380	18.1	<b>379</b>	<b>18.2</b>	374	18.5	380	18.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS2000 (Intel Xeon E5503)

**SPECint2006 = 21.7**

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Oct-2010

Hardware Availability: Apr-2010

Software Availability: Dec-2009

## Base Portability Flags (Continued)

471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/msc/smartheap/lib -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**HITACHI**

BladeSymphony BS2000 (Intel Xeon E5503)

**SPECint2006 =**

**21.7**

**CPU2006 license:** 872

**Test date:** Oct-2010

**Test sponsor:** HITACHI

**Hardware Availability:** Apr-2010

**Tested by:** HITACHI

**Software Availability:** Dec-2009

**SPECint\_base2006 =**

**19.6**

## Peak Portability Flags (Continued)

```

403.gcc: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
            -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
            -ipo -no-prec-div -ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12
           -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
              -prof-use(pass 2) -unroll12 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/home/bsc/smartheap/lib -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS2000 (Intel Xeon E5503)

SPECint2006 = 21.7

SPECint\_base2006 = 19.6

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Oct-2010

Hardware Availability: Apr-2010

Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/bsc/smartheap/lib -lsmartheap64
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.03.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.03.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 16:09:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 January 2011.