



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®_rate2006 = 262

Huawei XH620, Intel Xeon X5670

SPECfp_rate_base2006 = 255

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

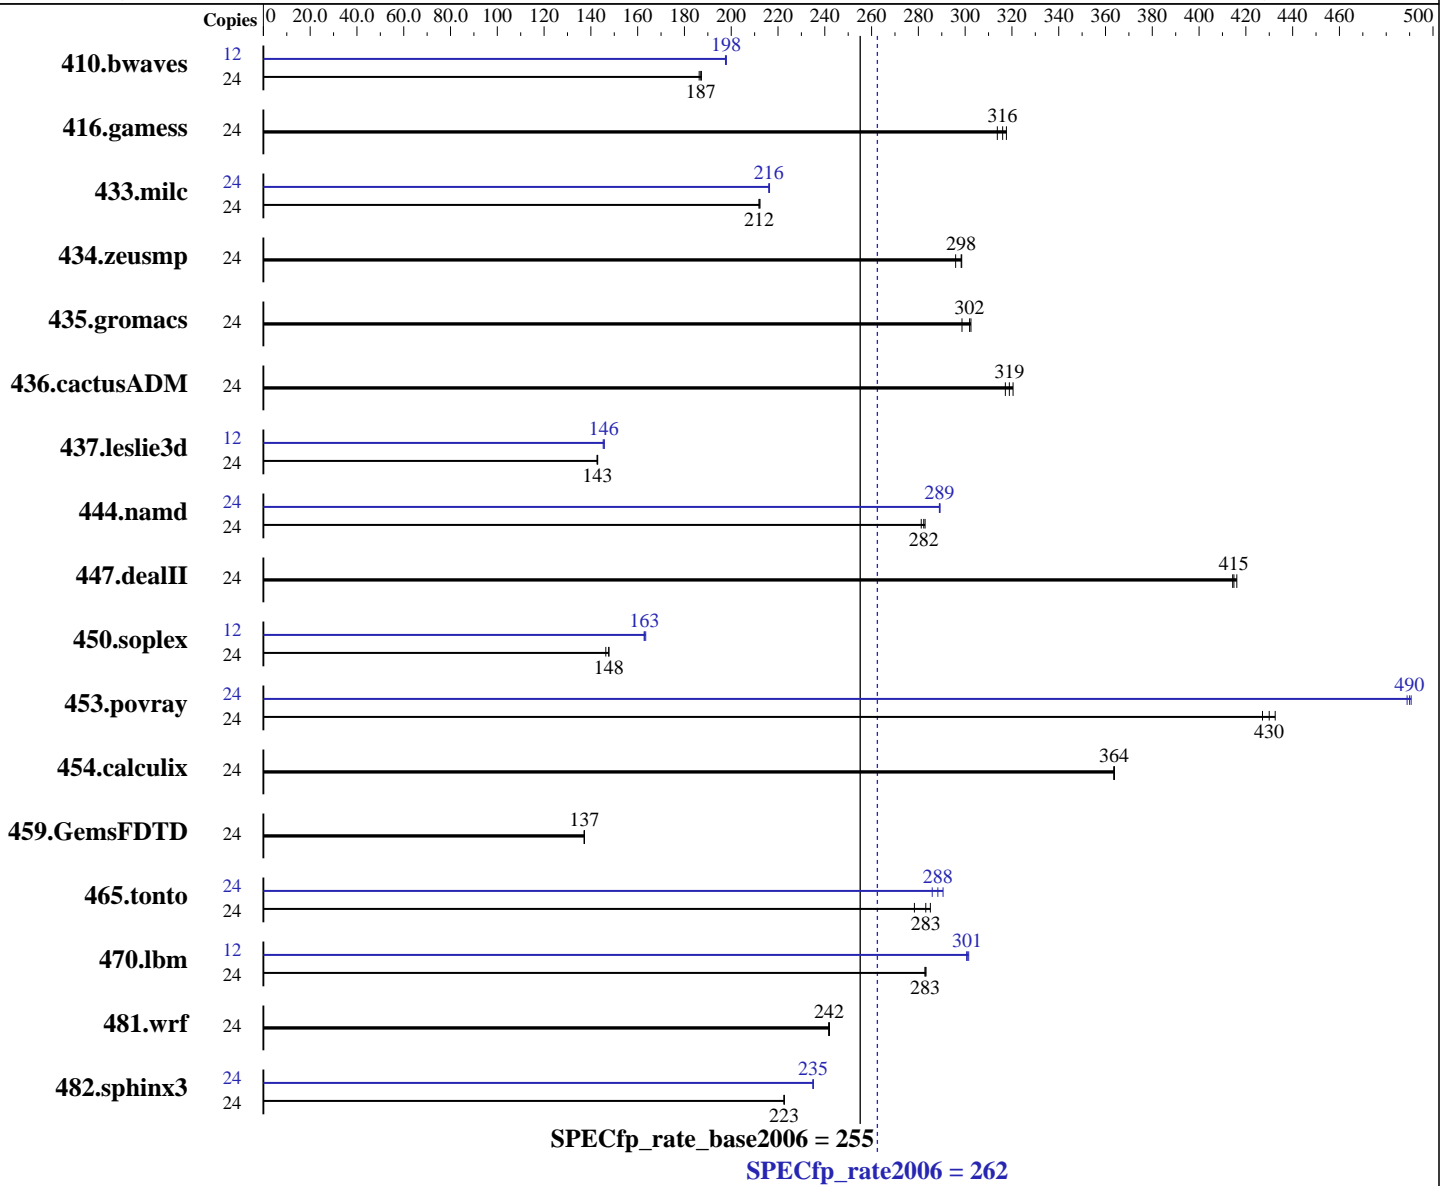

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: C++: Version 12.0.1.116 of Intel 64 Compiler XE Build 20101116; Fortran: Version 12.0.1.116 of Intel 64 Compiler XE Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 262

Huawei XH620, Intel Xeon X5670

SPECfp_rate_base2006 = 255

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 15K RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1742	187	1751	186	1744	187	12	824	198	824	198	826	198
416.gamess	24	1479	318	1487	316	1498	314	24	1479	318	1487	316	1498	314
433.milc	24	1039	212	1038	212	1040	212	24	1019	216	1018	216	1019	216
434.zeusmp	24	732	298	738	296	732	299	24	732	298	738	296	732	299
435.gromacs	24	574	299	568	302	567	302	24	574	299	568	302	567	302
436.cactusADM	24	904	317	895	320	899	319	24	904	317	895	320	899	319
437.leslie3d	24	1582	143	1579	143	1579	143	12	777	145	775	146	774	146
444.namd	24	680	283	684	281	682	282	24	665	289	666	289	666	289
447.dealII	24	663	414	662	415	660	416	24	663	414	662	415	660	416
450.soplex	24	1355	148	1367	146	1356	148	12	615	163	614	163	612	163
453.povray	24	299	427	295	433	297	430	24	261	490	260	491	261	489
454.calculix	24	544	364	544	364	545	364	24	544	364	544	364	545	364
459.GemsFDTD	24	1855	137	1855	137	1857	137	24	1855	137	1855	137	1857	137
465.tonto	24	828	285	834	283	849	278	24	819	288	826	286	813	291
470.lbm	24	1164	283	1166	283	1165	283	12	547	302	548	301	548	301
481.wrf	24	1109	242	1109	242	1108	242	24	1109	242	1109	242	1108	242
482.sphinx3	24	2101	223	2101	223	2101	223	24	1989	235	1991	235	1990	235

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 1 >/proc/sys/vm/zone_reclaim_mode
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 10800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 262

Huawei XH620, Intel Xeon X5670

SPECfp_rate_base2006 = 255

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

Platform Notes

Data Reuse Optimization disabled in BIOS Setup.

General Notes

Binaries compiled on RHEL 5.5

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 262

Huawei XH620, Intel Xeon X5670

SPECfp_rate_base2006 = 255

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2011
Hardware Availability: May-2011
Software Availability: Jan-2011

Base Optimization Flags (Continued)

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias
Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static
Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64
482.sphinx3: icc -m32
C++ benchmarks (except as noted below):
icpc -m64
450.soplex: icpc -m32
Fortran benchmarks:
ifort -m64
Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 262

Huawei XH620, Intel Xeon X5670

SPECfp_rate_base2006 = 255

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 262

Huawei XH620, Intel Xeon X5670

SPECfp_rate_base2006 = 255

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2011

Hardware Availability: May-2011

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 01:47:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 October 2011.