



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®_rate2006 = 1220

NovaScale R470 F3 (Intel Xeon E5-4650, 2.70 GHz)

SPECint_rate_base2006 = 1170

CPU2006 license: 20


Test date: Mar-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

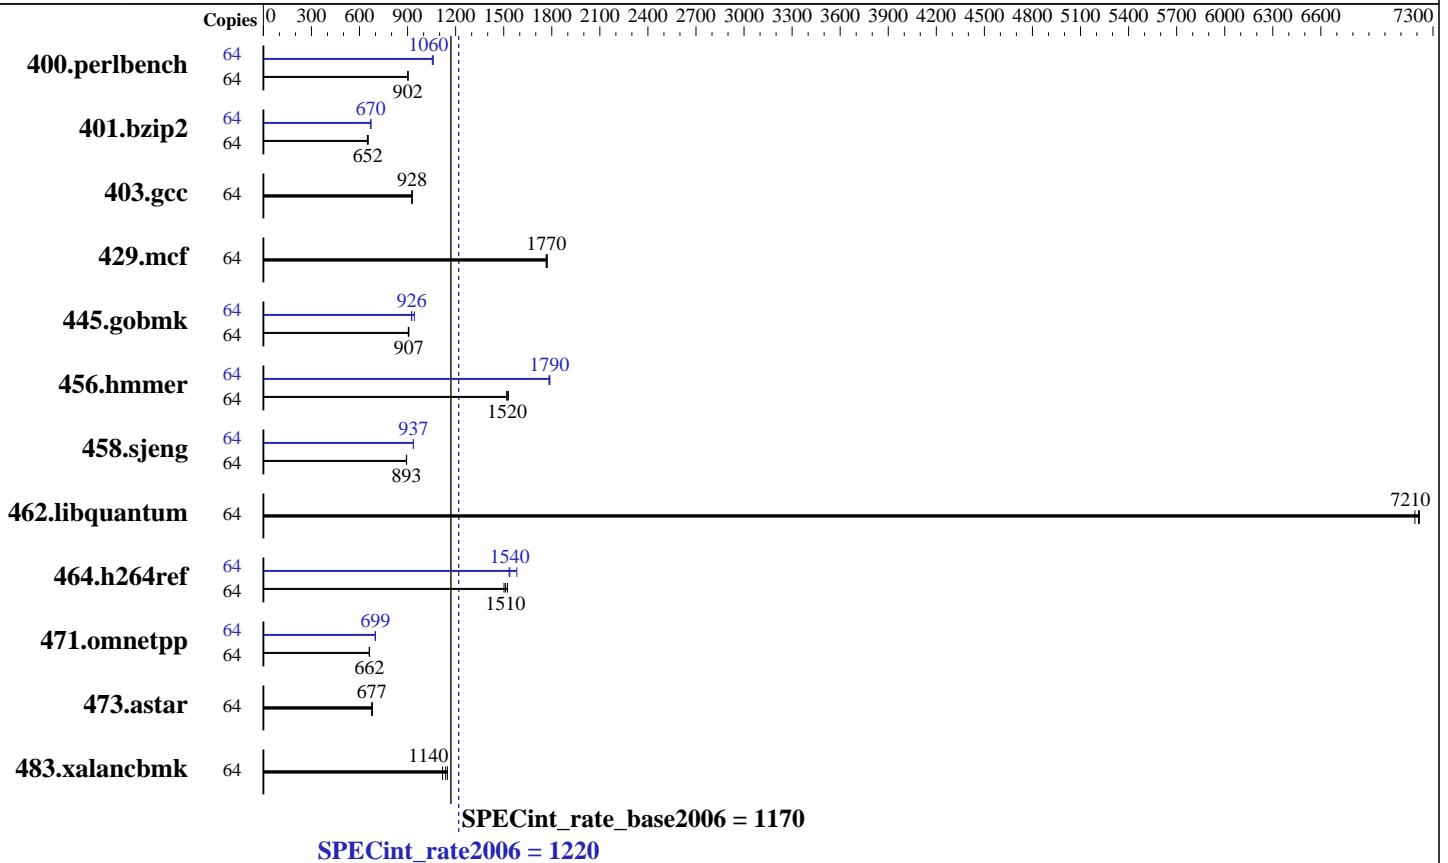

Hardware

CPU Name: Intel Xeon E5-4650
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS, RAID 0
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.19-default
 Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 1220

NovaScale R470 F3 (Intel Xeon E5-4650, 2.70 GHz)

SPECint_rate_base2006 = 1170

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2012
Hardware Availability: May-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	693	902	694	901	692	904	64	590	1060	593	1050	591	1060
401.bzip2	64	944	654	947	652	951	649	64	921	670	921	671	922	670
403.gcc	64	555	928	556	927	555	928	64	555	928	556	927	555	928
429.mcf	64	331	1760	329	1770	330	1770	64	331	1760	329	1770	330	1770
445.gobmk	64	740	908	740	907	742	905	64	725	926	712	943	726	924
456.hammer	64	392	1520	393	1520	390	1530	64	335	1780	334	1790	334	1790
458.sjeng	64	866	894	868	893	867	893	64	826	937	827	936	827	937
462.libquantum	64	185	7190	184	7210	184	7220	64	185	7190	184	7210	184	7220
464.h264ref	64	930	1520	937	1510	943	1500	64	895	1580	921	1540	923	1530
471.omnetpp	64	604	662	605	661	604	662	64	573	698	572	699	572	699
473.astar	64	663	677	664	677	661	680	64	663	677	664	677	661	680
483.xalancbmk	64	384	1150	388	1140	395	1120	64	384	1150	388	1140	395	1120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

System Profile set to Custom
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost set to Enabled
C States/C1E set to Enabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on linux-2z46 Wed Mar 14 17:32:08 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4650 0 @ 2.70GHz
4 "physical id"s (chips)
64 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 1220

NovaScale R470 F3 (Intel Xeon E5-4650, 2.70 GHz)

SPECint_rate_base2006 = 1170

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2012
Hardware Availability: May-2012
Software Availability: Feb-2012

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264501512 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux linux-2z46 3.0.13-0.19-default #1 SMP Fri Feb 3 15:38:23 UTC 2012
(7f256ae) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 14 17:29 last=S
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext3  119G  7.1G  111G   6% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 1220

NovaScale R470 F3 (Intel Xeon E5-4650, 2.70 GHz)

SPECint_rate_base2006 = 1170

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2012
Hardware Availability: May-2012
Software Availability: Feb-2012

General Notes (Continued)

numactl --interleave=all runspec <etc>
The Dell PowerEdge R820 and
the Bull NovaScale R470 F3 Models are electronically equivalent.
The results have been measured on a Dell PowerEdge R820 model.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 1220

NovaScale R470 F3 (Intel Xeon E5-4650, 2.70 GHz)

SPECint_rate_base2006 = 1170

CPU2006 license: 20

Test date: Mar-2012

Test sponsor: Bull SAS

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
 401.bzip2: `-DSPEC_CPU_LP64`
 456.hmmer: `-DSPEC_CPU_LP64`
 458.sjeng: `-DSPEC_CPU_LP64`
 462.libquantum: `-DSPEC_CPU_LINUX`
 483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 1220

NovaScale R470 F3 (Intel Xeon E5-4650, 2.70 GHz)

SPECint_rate_base2006 = 1170

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2012
Hardware Availability: May-2012
Software Availability: Feb-2012

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 05:41:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 June 2012.