



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp<sup>®</sup>\_rate2006 = 334

Cisco UCS B200 M3 (Intel Xeon E5-2620, 2.00 GHz)

SPECfp\_rate\_base2006 = 328

CPU2006 license: 9019


Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

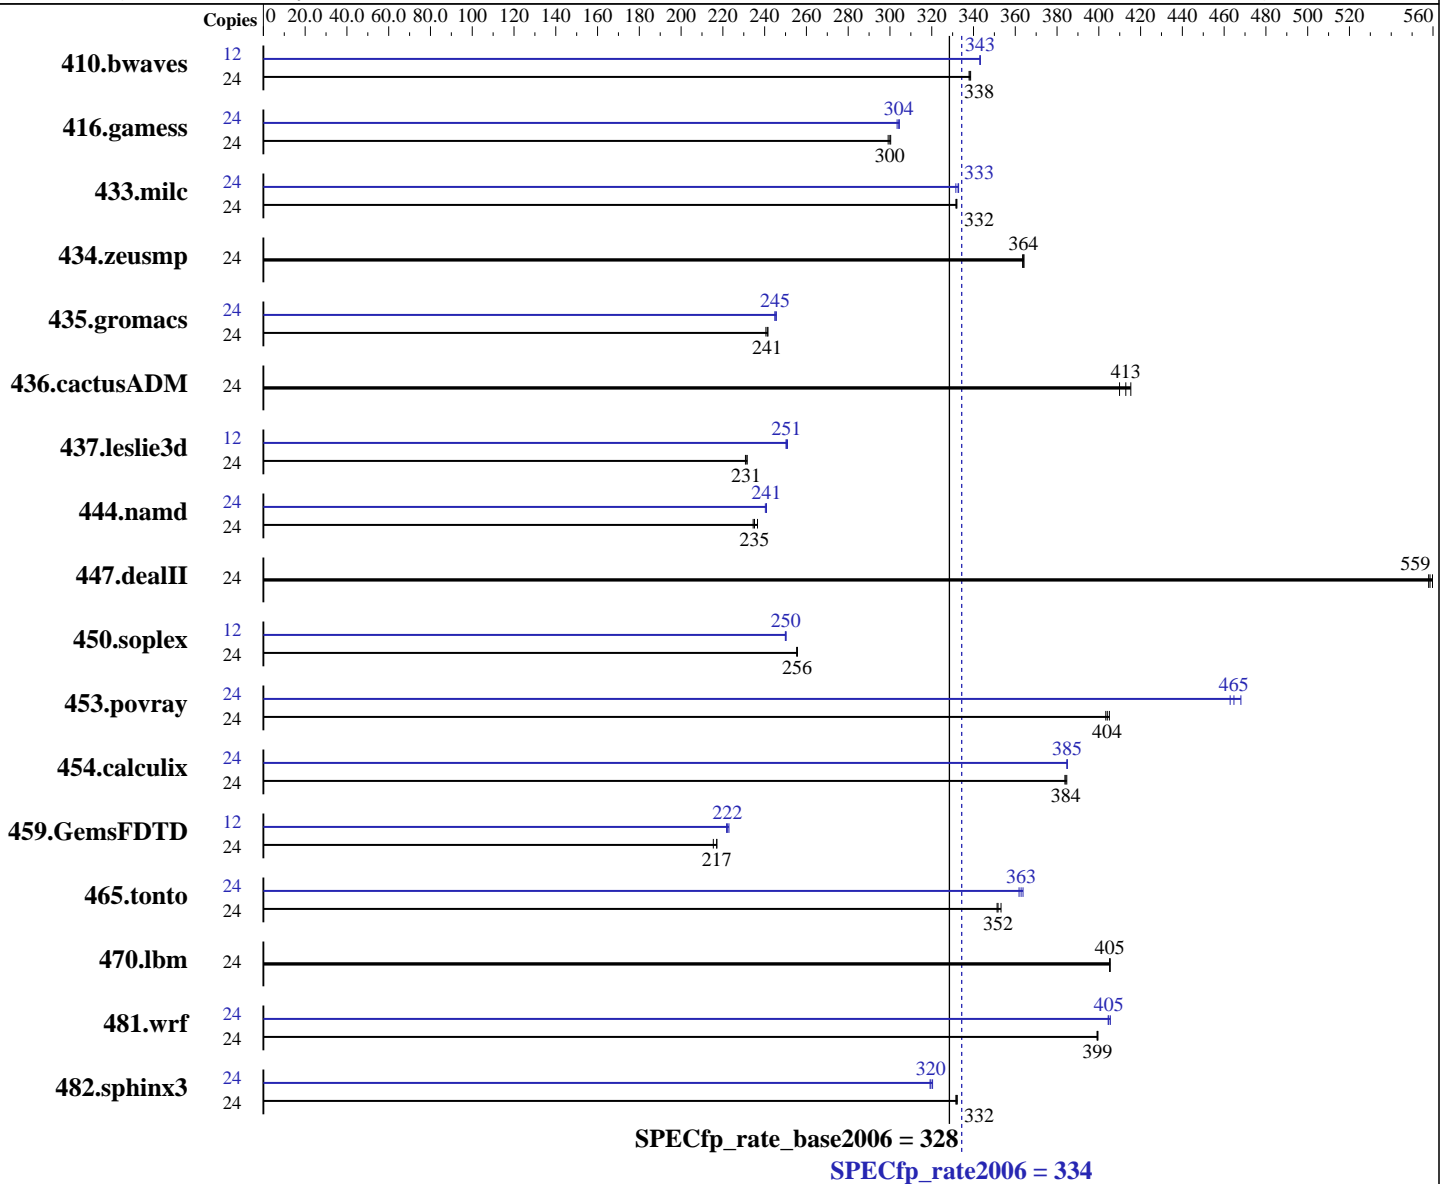

### Hardware

CPU Name: Intel Xeon E5-2620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp\_rate2006 = **334**

Cisco UCS B200 M3 (Intel Xeon E5-2620, 2.00 GHz)

SPECfp\_rate\_base2006 = **328**

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL7)  
 Disk Subsystem: 1 X 300 GB 10000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	963	339	965	338	<b>964</b>	<b>338</b>	12	475	343	<b>475</b>	<b>343</b>	475	343		
416.gamess	24	1571	299	1565	300	<b>1567</b>	<b>300</b>	24	1543	304	<b>1545</b>	<b>304</b>	1549	303		
433.milc	24	664	332	<b>664</b>	<b>332</b>	663	332	24	665	332	662	333	<b>662</b>	<b>333</b>		
434.zeusmp	24	601	363	<b>600</b>	<b>364</b>	600	364	24	601	363	<b>600</b>	<b>364</b>	600	364		
435.gromacs	24	712	241	<b>710</b>	<b>241</b>	709	242	24	700	245	698	246	<b>699</b>	<b>245</b>		
436.cactusADM	24	700	410	691	415	<b>695</b>	<b>413</b>	24	700	410	691	415	<b>695</b>	<b>413</b>		
437.leslie3d	24	974	232	977	231	<b>976</b>	<b>231</b>	12	450	251	451	250	<b>450</b>	<b>251</b>		
444.namd	24	814	237	<b>819</b>	<b>235</b>	821	235	24	801	240	799	241	<b>799</b>	<b>241</b>		
447.dealII	24	<b>492</b>	<b>559</b>	491	560	492	558	24	<b>492</b>	<b>559</b>	491	560	492	558		
450.soplex	24	784	255	783	256	<b>783</b>	<b>256</b>	12	400	250	400	250	<b>400</b>	<b>250</b>		
453.povray	24	<b>316</b>	<b>404</b>	317	403	315	405	24	<b>275</b>	<b>465</b>	273	468	276	463		
454.calculix	24	515	385	<b>515</b>	<b>384</b>	516	384	24	514	385	515	385	<b>514</b>	<b>385</b>		
459.GemsFDTD	24	<b>1173</b>	<b>217</b>	1182	215	1173	217	12	574	222	571	223	<b>573</b>	<b>222</b>		
465.tonto	24	669	353	<b>671</b>	<b>352</b>	672	351	24	649	364	653	362	<b>651</b>	<b>363</b>		
470.lbm	24	814	405	813	405	<b>814</b>	<b>405</b>	24	814	405	813	405	<b>814</b>	<b>405</b>		
481.wrf	24	<b>671</b>	<b>399</b>	671	400	672	399	24	663	404	<b>662</b>	<b>405</b>	661	406		
482.sphinx3	24	<b>1410</b>	<b>332</b>	1408	332	1411	332	24	<b>1464</b>	<b>320</b>	1465	319	1460	320		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

SPECfp\_rate2006 = 334

Cisco UCS B200 M3 (Intel Xeon E5-2620, 2.00 GHz)

SPECfp\_rate\_base2006 = 328

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

### Platform Notes

#### BIOS Configuration:

Processor C6 Report set to Disabled

Processor C1E set to Disabled

CPU Performance set to HPC

LV DDR Mode set to Performance-mode

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on localhost.localdomain Thu May 10 14:27:37 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

#### From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2620 0 @ 2.00GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 12

physical 0: cores 0 1 2 3 4 5

physical 1: cores 0 1 2 3 4 5

cache size : 15360 KB

#### From /proc/meminfo

MemTotal: 132100944 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

#### /usr/bin/lsb\_release -d

Red Hat Enterprise Linux Server release 6.2 (Santiago)

#### From /etc/\*release\* /etc/\*version\*

redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

#### uname -a:

Linux localhost.localdomain 2.6.32-220.el6.x86\_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 May 10 14:18

#### SPEC is set to: /opt/cpu2006-1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext4	275G	8.0G	253G	4%	/

#### Additional information from dmidecode:

##### Memory:

16x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 1 rank

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 334

Cisco UCS B200 M3 (Intel Xeon E5-2620, 2.00 GHz)

SPECfp\_rate\_base2006 = 328

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

Intel HT Technology = enable

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 334

Cisco UCS B200 M3 (Intel Xeon E5-2620, 2.00 GHz)

SPECfp\_rate\_base2006 = 328

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 334

Cisco UCS B200 M3 (Intel Xeon E5-2620, 2.00 GHz)

SPECfp\_rate\_base2006 = 328

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

### C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static
-unroll2

```

### C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-opt-mem-layout-trans=3

```

### Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp\_rate2006 = 334

Cisco UCS B200 M3 (Intel Xeon E5-2620, 2.00 GHz)

SPECfp\_rate\_base2006 = 328

CPU2006 license: 9019

Test date: May-2012

Test sponsor: Cisco Systems

Hardware Availability: Jun-2012

Tested by: Cisco Systems

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div  
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static  
-auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 06:28:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 5 June 2012.