



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 300

Express5800/B120d (Intel Xeon E5-2470)

SPECint_rate_base2006 = 289

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

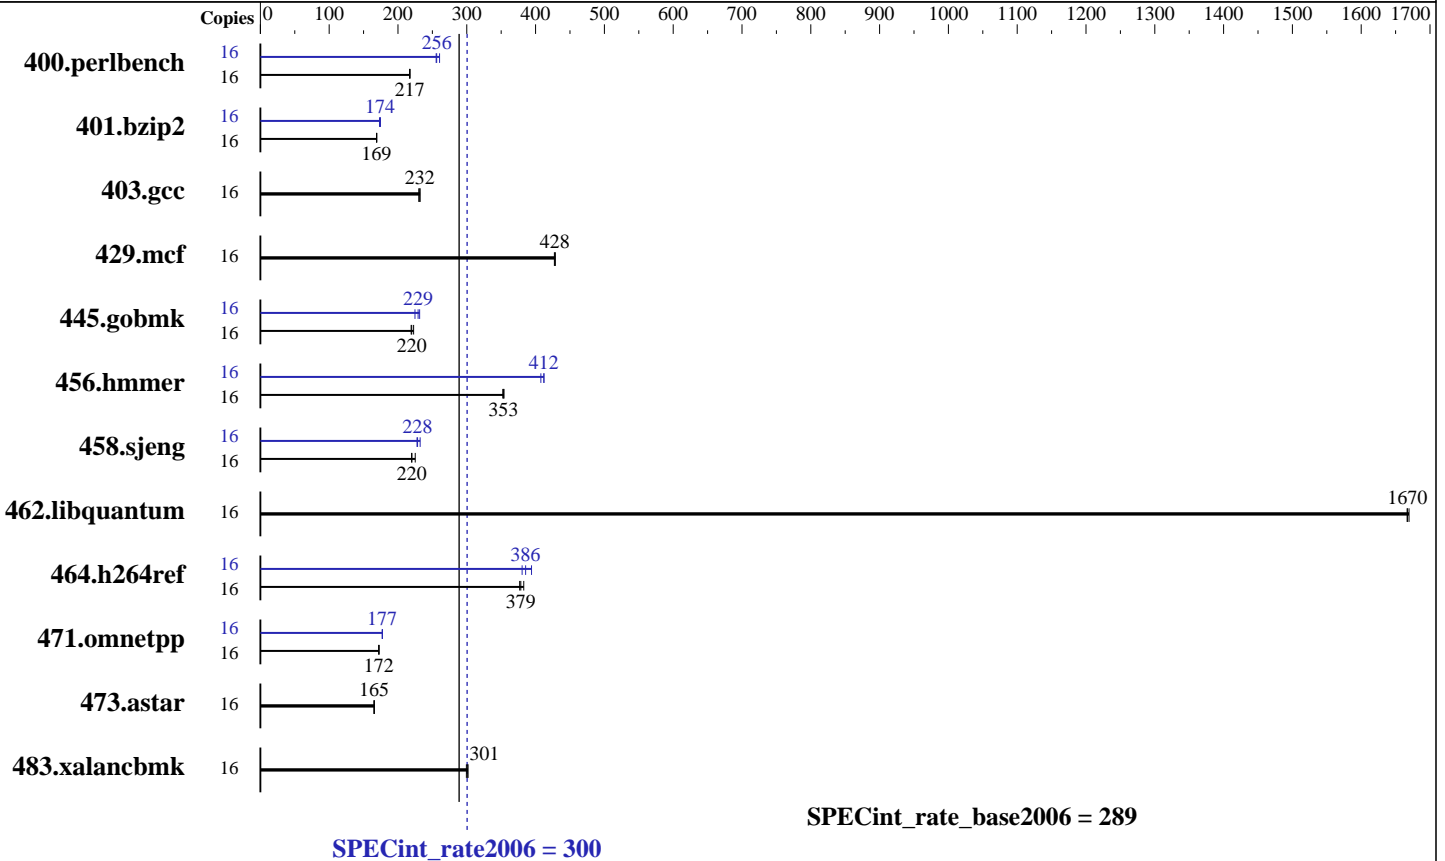

Hardware

CPU Name: Intel Xeon E5-2470
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 300

Express5800/B120d (Intel Xeon E5-2470)

SPECint_rate_base2006 = 289

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	719	218	<u>720</u>	<u>217</u>	721	217	16	600	260	612	255	<u>610</u>	<u>256</u>
401.bzip2	16	<u>914</u>	<u>169</u>	913	169	914	169	16	<u>886</u>	<u>174</u>	892	173	885	174
403.gcc	16	555	232	560	230	<u>556</u>	<u>232</u>	16	555	232	560	230	<u>556</u>	<u>232</u>
429.mcf	16	341	427	340	429	<u>341</u>	<u>428</u>	16	341	427	340	429	<u>341</u>	<u>428</u>
445.gobmk	16	<u>763</u>	<u>220</u>	766	219	754	223	16	<u>732</u>	<u>229</u>	747	225	725	231
456.hammer	16	422	354	<u>422</u>	<u>353</u>	424	352	16	362	412	<u>362</u>	<u>412</u>	366	408
458.sjeng	16	860	225	881	220	<u>879</u>	<u>220</u>	16	<u>847</u>	<u>228</u>	850	228	834	232
462.libquantum	16	199	1670	<u>199</u>	<u>1670</u>	199	1670	16	199	1670	<u>199</u>	<u>1670</u>	199	1670
464.h264ref	16	<u>935</u>	<u>379</u>	925	383	940	377	16	898	394	<u>918</u>	<u>386</u>	931	380
471.omnetpp	16	580	172	581	172	<u>581</u>	<u>172</u>	16	565	177	<u>564</u>	<u>177</u>	563	177
473.astar	16	678	166	680	165	<u>680</u>	<u>165</u>	16	678	166	680	165	<u>680</u>	<u>165</u>
483.xalancbmk	16	366	302	369	299	<u>366</u>	<u>301</u>	16	366	302	369	299	<u>366</u>	<u>301</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance
Memory Voltage: 1.5 V

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Added glibc-static-2.12-1.47.el6.x86_64.rpm
to enable static linking

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 300

Express5800/B120d (Intel Xeon E5-2470)

SPECint_rate_base2006 = 289

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

General Notes (Continued)

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 300

Express5800/B120d (Intel Xeon E5-2470)

SPECint_rate_base2006 = 289

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: Jun-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 300

Express5800/B120d (Intel Xeon E5-2470)

SPECint_rate_base2006 = 289

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: Jun-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 09:47:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 July 2012.