



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint®_rate2006 = 438

Servidor Itaotec MX215 (Intel Xeon E5-2630)

SPECint_rate_base2006 = 419

CPU2006 license: 9001


Test date: Feb-2013

Test sponsor: Itaotec

Hardware Availability: Jun-2012

Tested by: Itaotec

Software Availability: Jun-2012

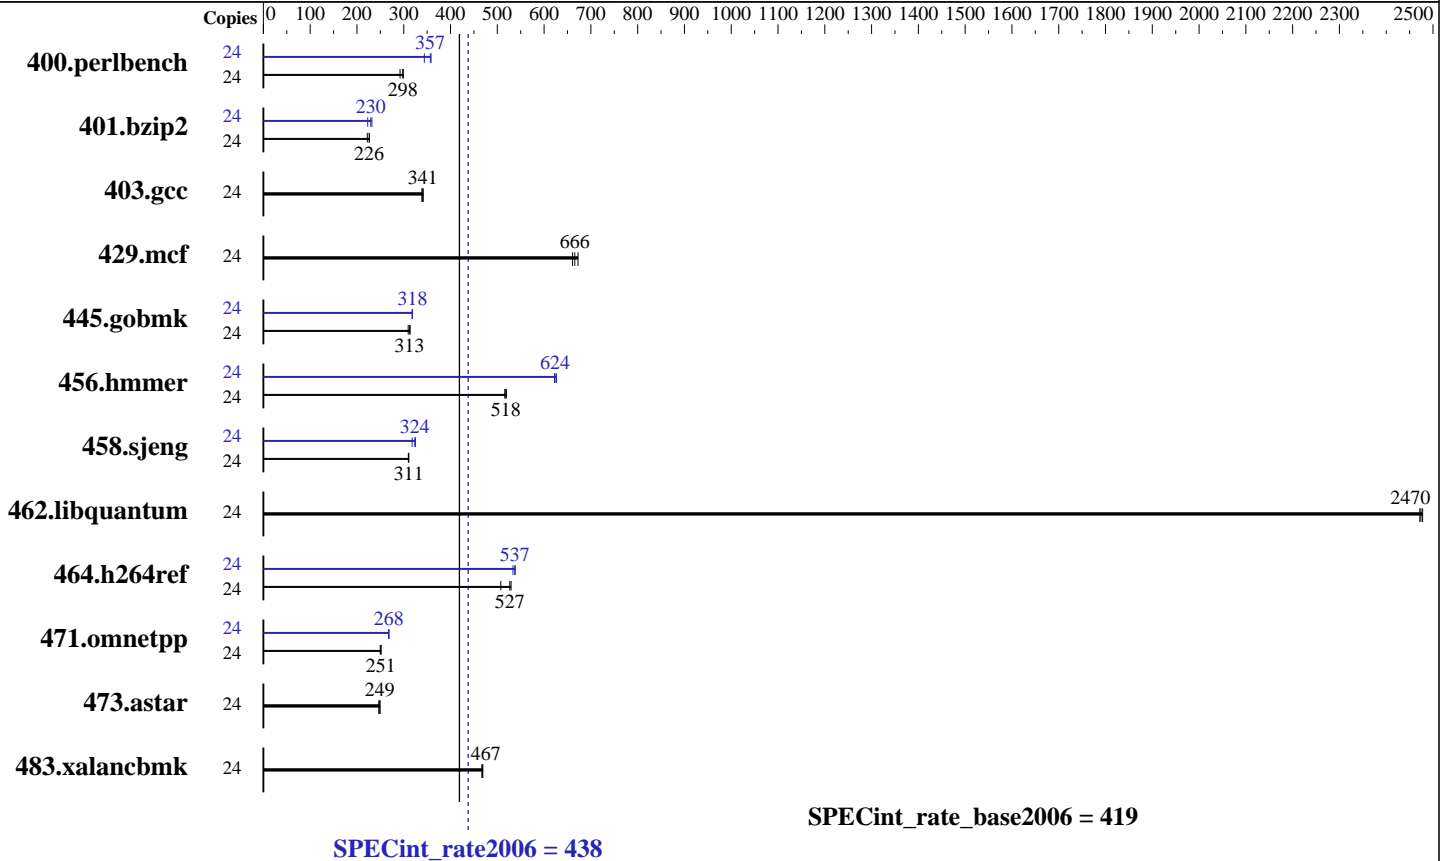

Hardware

CPU Name: Intel Xeon E5-2630
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (8 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1000 GB, SATA-3, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server Release 6.3, 2.6.32-279.el6.x86_64
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 438

Servidor Itaotec MX215 (Intel Xeon E5-2630)

SPECint_rate_base2006 = 419

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Feb-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<u>787</u>	<u>298</u>	784	299	803	292	24	<u>657</u>	<u>357</u>	682	344	654	358
401.bzip2	24	<u>1023</u>	<u>226</u>	1023	226	1043	222	24	<u>1009</u>	<u>230</u>	1038	223	998	232
403.gcc	24	<u>567</u>	<u>341</u>	570	339	566	342	24	<u>567</u>	<u>341</u>	570	339	566	342
429.mcf	24	325	673	<u>329</u>	<u>666</u>	331	661	24	325	673	<u>329</u>	<u>666</u>	331	661
445.gobmk	24	813	310	803	314	<u>805</u>	<u>313</u>	24	<u>791</u>	<u>318</u>	792	318	790	318
456.hammer	24	434	516	<u>432</u>	<u>518</u>	431	519	24	360	622	357	626	<u>359</u>	<u>624</u>
458.sjeng	24	937	310	935	311	<u>935</u>	<u>311</u>	24	913	318	<u>897</u>	<u>324</u>	893	325
462.libquantum	24	201	2480	<u>201</u>	<u>2470</u>	201	2470	24	201	2480	<u>201</u>	<u>2470</u>	201	2470
464.h264ref	24	1047	507	<u>1009</u>	<u>527</u>	1003	529	24	<u>989</u>	<u>537</u>	996	533	986	538
471.omnetpp	24	<u>597</u>	<u>251</u>	600	250	597	251	24	<u>559</u>	<u>268</u>	561	268	559	268
473.astar	24	<u>677</u>	<u>249</u>	683	247	676	249	24	<u>677</u>	<u>249</u>	683	247	676	249
483.xalancbmk	24	<u>354</u>	<u>467</u>	354	467	353	469	24	<u>354</u>	<u>467</u>	354	467	353	469

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

Sysinfo program /home/rcaneca/cpu2006/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ 8787f7622badcf24e01c368b1db4377c
running on mx225 Sat Feb 16 07:57:03 2013

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Genuine Intel(R) CPU @ 2.30GHz
model name : Intel(R) Xeon(R) CPU E5-2630 0 @ 2.30GHz
2 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 438

Servidor Itautec MX215 (Intel Xeon E5-2630)

SPECint_rate_base2006 = 419

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Platform Notes (Continued)

```
siblings : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      65917564 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux mx225 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 15 18:27
```

```
SPEC is set to: /home/rcaneca/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_mx225-lv_home
ext4            836G  2.2G  791G   1% /home
```

(End of data from sysinfo program)

General Notes

This result was measured on the Servidor Itautec MX225.
The Servidor Itautec MX215 and the Servidor Itautec MX225
are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 438

Servidor Itautec MX215 (Intel Xeon E5-2630)

SPECint_rate_base2006 = 419

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32
400.perlbench: icc -m64
401.bzip2: icc -m64
456.hmmmer: icc -m64
458.sjeng: icc -m64
C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 438

Servidor Itaotec MX215 (Intel Xeon E5-2630)

SPECint_rate_base2006 = 419

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Feb-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzp2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 438

Servidor Itautec MX215 (Intel Xeon E5-2630)

SPECint_rate_base2006 = 419

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2013
Hardware Availability: Jun-2012
Software Availability: Jun-2012

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml
<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:42:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 March 2013.