



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6017TR-TQF (X9DRT-IBQF,  
Intel Xeon E5-2640, 2.50 GHz)

**SPECfp®2006 = 77.3**

**SPECfp\_base2006 = 75.0**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

**Test date:** Apr-2013

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2012

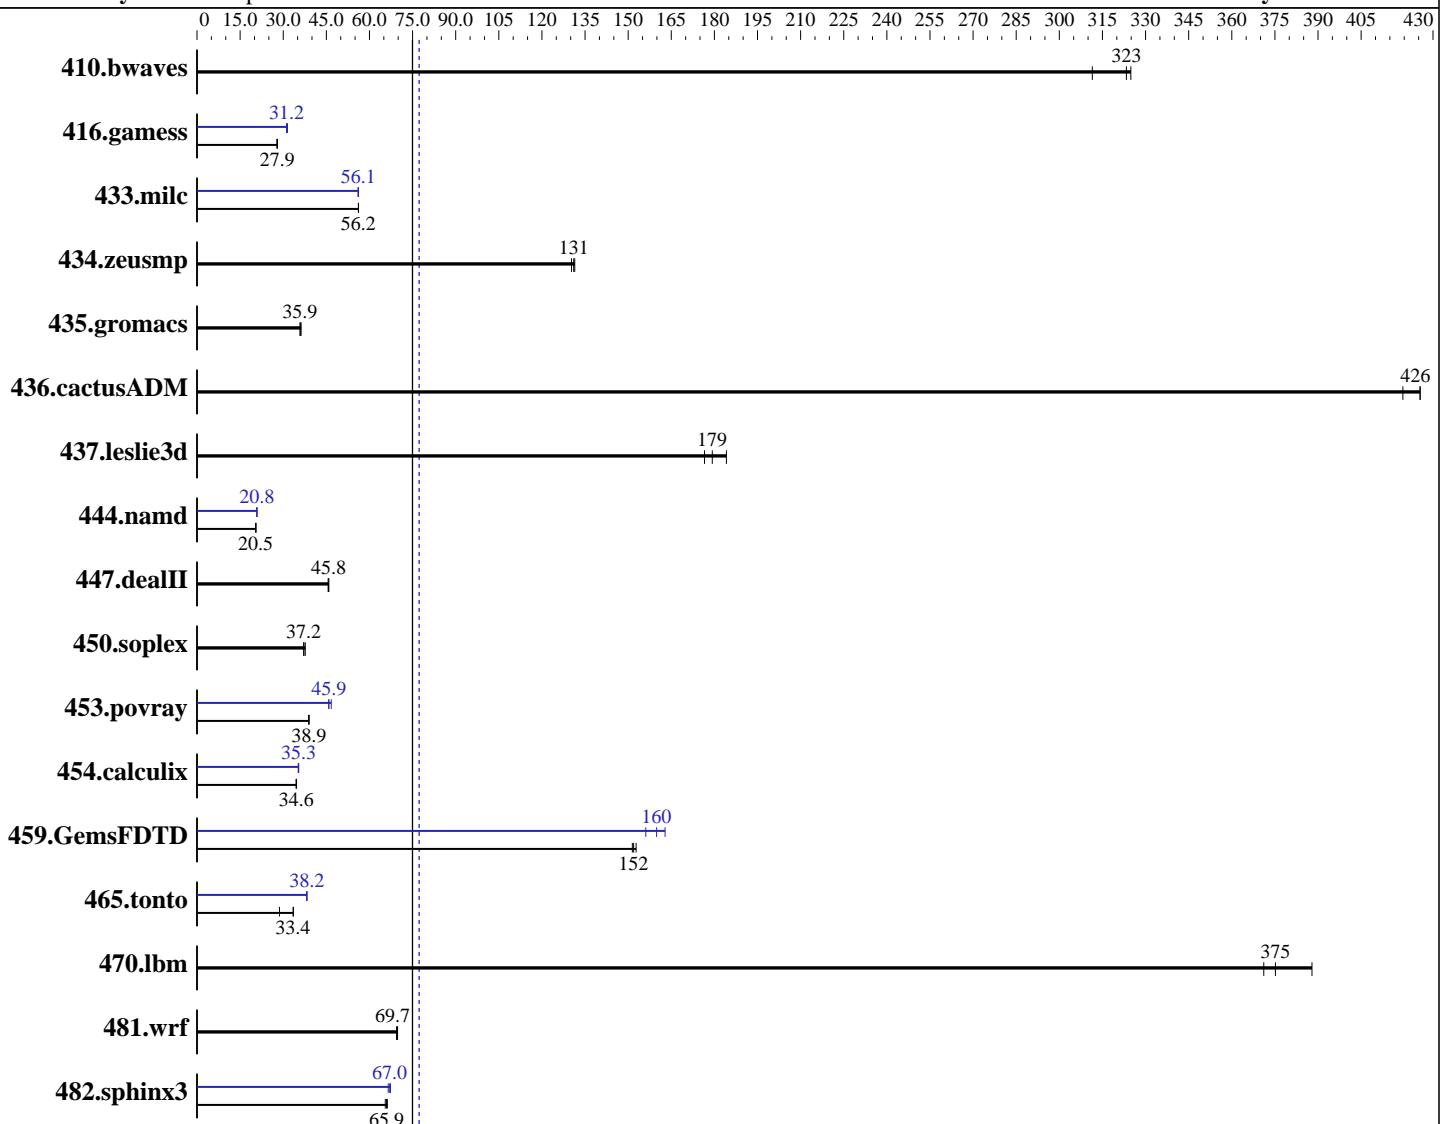

### Hardware

CPU Name: Intel Xeon E5-2640  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server Release 6.2, Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 13.0.0.133 of Intel C++ Studio XE for Linux;  
 Fortran: Version 13.0.0.133 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6017TR-TQF (X9DRT-IBQF,  
Intel Xeon E5-2640, 2.50 GHz)

**SPECfp2006 = 77.3**

**SPECfp\_base2006 = 75.0**

**CPU2006 license:** 001176

**Test date:** Apr-2013

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2012

**Tested by:** Supermicro

**Software Availability:** Oct-2012

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)  
Disk Subsystem: 1 x 1 TB SATA II, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	<b>42.0</b>	<u>323</u>	41.8	325	43.6	311	<b>42.0</b>	<u>323</u>	41.8	325	43.6	311
416.gamess	700	28.0	704	27.8	<b>701</b>	<u>27.9</u>	<b>627</b>	<u>31.2</u>	628	31.2	622	31.5
433.milc	163	56.2	163	56.2	<b>163</b>	<u>56.2</u>	164	56.1	164	56.1	<b>164</b>	<u>56.1</u>
434.zeusmp	69.8	130	<b>69.4</b>	<u>131</u>	69.2	131	69.8	130	<b>69.4</b>	<u>131</u>	69.2	131
435.gromacs	<b>199</b>	<u>35.9</u>	197	36.2	199	35.9	<b>199</b>	<u>35.9</u>	197	36.2	199	35.9
436.cactusADM	28.1	426	<b>28.1</b>	<u>426</u>	28.5	420	<b>28.1</b>	426	<b>28.1</b>	<u>426</u>	28.5	420
437.leslie3d	51.0	184	<b>52.4</b>	<u>179</u>	53.2	177	<b>51.0</b>	184	<b>52.4</b>	<u>179</u>	53.2	177
444.namd	392	20.5	<b>392</b>	<u>20.5</u>	392	20.5	<b>385</b>	20.8	385	20.8	<b>385</b>	<u>20.8</u>
447.dealII	251	45.6	249	45.9	<b>250</b>	<u>45.8</u>	251	45.6	249	45.9	<b>250</b>	<u>45.8</u>
450.soplex	221	37.7	225	37.1	<b>224</b>	<u>37.2</u>	221	37.7	225	37.1	<b>224</b>	<u>37.2</u>
453.povray	137	39.0	137	38.9	<b>137</b>	<u>38.9</u>	114	46.7	<b>116</b>	<u>45.9</u>	116	45.8
454.calculix	<b>239</b>	<u>34.6</u>	238	34.6	239	34.5	<b>234</b>	35.2	<b>234</b>	<u>35.3</u>	233	35.4
459.GemsFDTD	70.1	151	<b>69.9</b>	<u>152</u>	69.5	153	68.0	156	<b>66.4</b>	<u>160</u>	65.2	163
465.tonto	343	28.7	294	33.5	<b>294</b>	<u>33.4</u>	257	38.2	258	38.2	<b>258</b>	<u>38.2</u>
470.lbm	35.4	388	37.0	371	<b>36.6</b>	<u>375</u>	35.4	388	37.0	371	<b>36.6</b>	<u>375</u>
481.wrf	<b>160</b>	<u>69.7</u>	160	69.8	161	69.4	<b>160</b>	<u>69.7</u>	160	69.8	161	69.4
482.sphinx3	<b>296</b>	<u>65.9</u>	294	66.2	298	65.5	<b>291</b>	<u>67.0</u>	290	67.3	293	66.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"  
OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6017TR-TQF (X9DRT-IBQF,  
Intel Xeon E5-2640, 2.50 GHz)

**SPECfp2006 = 77.3**

**SPECfp\_base2006 = 75.0**

**CPU2006 license:** 001176

**Test date:** Apr-2013

**Test sponsor:** Supermicro

**Hardware Availability:** Mar-2012

**Tested by:** Supermicro

**Software Availability:** Oct-2012

## General Notes (Continued)

`numactl --interleave=all runspec <etc>`

## Base Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
    433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
437.leslie3d: `-DSPEC_CPU_LP64`  
    444.namd: `-DSPEC_CPU_LP64`  
    447.dealII: `-DSPEC_CPU_LP64`  
450.soplex: `-DSPEC_CPU_LP64`  
453.povray: `-DSPEC_CPU_LP64`  
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
459.GemsFDTD: `-DSPEC_CPU_LP64`  
    465.tonto: `-DSPEC_CPU_LP64`  
    470.lbm: `-DSPEC_CPU_LP64`  
    481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`  
482.sphinx3: `-DSPEC_CPU_LP64`

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6017TR-TQF (X9DRT-IBQF,  
Intel Xeon E5-2640, 2.50 GHz)

**SPECfp2006 = 77.3**

**SPECfp\_base2006 = 75.0**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2013

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2012

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6017TR-TQF (X9DRT-IBQF,  
Intel Xeon E5-2640, 2.50 GHz)

**SPECfp2006 = 77.3**

**SPECfp\_base2006 = 75.0**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2013

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2012

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6017TR-TQF (X9DRT-IBQF,  
Intel Xeon E5-2640, 2.50 GHz)

**SPECfp2006 =** **77.3**

**SPECfp\_base2006 =** **75.0**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2013

**Hardware Availability:** Mar-2012

**Software Availability:** Oct-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 16:12:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 July 2013.