



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECint®\_rate2006 = 1860

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

SPECint\_rate\_base2006 = 1790

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

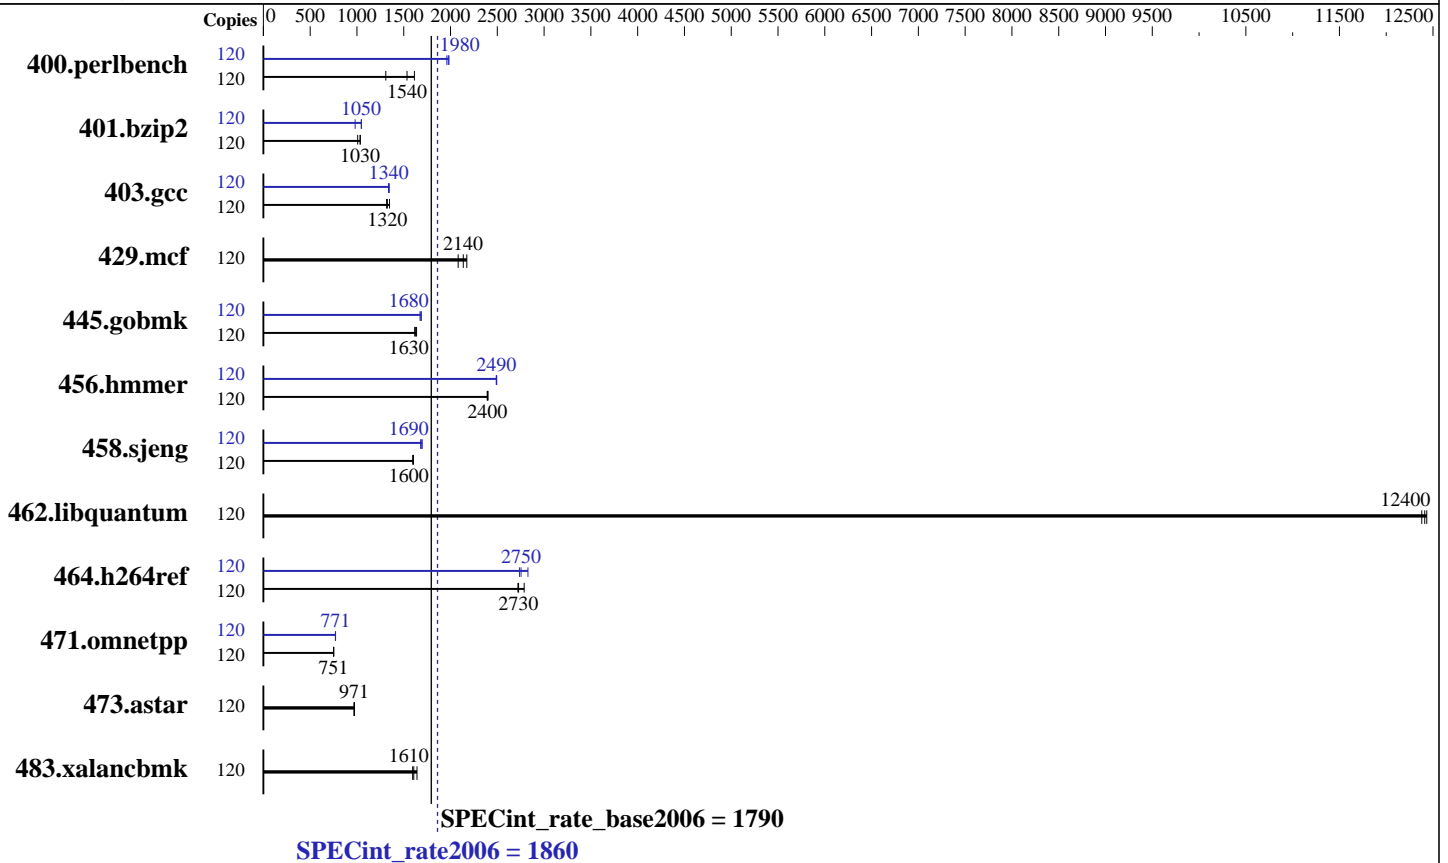

### Hardware

CPU Name: Intel Xeon E7-4880 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 60 cores, 4 chips, 15 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 37.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 2 x 600 GB SAS, 10K RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECint\_rate2006 = 1860

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

SPECint\_rate\_base2006 = 1790

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Jun-2014  
Hardware Availability: Feb-2014  
Software Availability: Nov-2013

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	120	726	1610	<b>764</b>	<b>1540</b>	896	1310	120	591	1980	598	1960	<b>593</b>	<b>1980</b>
401.bzip2	120	<b>1120</b>	<b>1030</b>	1118	1040	1149	1010	120	<b>1107</b>	<b>1050</b>	1106	1050	1181	981
403.gcc	120	<b>729</b>	<b>1320</b>	734	1320	717	1350	120	718	1340	722	1340	<b>720</b>	<b>1340</b>
429.mcf	120	503	2170	526	2080	<b>512</b>	<b>2140</b>	120	503	2170	526	2080	<b>512</b>	<b>2140</b>
445.gobmk	120	779	1620	<b>774</b>	<b>1630</b>	769	1640	120	752	1670	<b>748</b>	<b>1680</b>	746	1690
456.hammer	120	<b>467</b>	<b>2400</b>	468	2390	466	2400	120	<b>450</b>	<b>2490</b>	449	2490	450	2490
458.sjeng	120	909	1600	<b>906</b>	<b>1600</b>	906	1600	120	864	1680	<b>860</b>	<b>1690</b>	855	1700
462.libquantum	120	200	12400	201	12400	<b>200</b>	<b>12400</b>	120	200	12400	201	12400	<b>200</b>	<b>12400</b>
464.h264ref	120	976	2720	<b>974</b>	<b>2730</b>	953	2790	120	970	2740	939	2830	<b>964</b>	<b>2750</b>
471.omnetpp	120	998	752	1000	750	<b>999</b>	<b>751</b>	120	972	771	<b>973</b>	<b>771</b>	975	769
473.astar	120	865	973	869	969	<b>868</b>	<b>971</b>	120	865	973	869	969	<b>868</b>	<b>971</b>
483.xalancbmk	120	<b>515</b>	<b>1610</b>	519	1600	504	1640	120	<b>515</b>	<b>1610</b>	519	1600	504	1640

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Set Lock\_step to disabled  
Baseboard Management Controller used to adjust the fan speed to 100%  
Sysinfo program /spec/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on RH5885V3 Sun Jun 8 07:50:26 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-4880 v2 @ 2.50GHz  
4 "physical id"s (chips)  
120 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1860

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

SPECint\_rate\_base2006 = 1790

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

## Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```

cpu cores : 15
siblings  : 30
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
cache size : 38400 KB

```

From /proc/meminfo

```

MemTotal:      264349508 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

/usr/bin/lsb\_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/\*release\* /etc/\*version\*

```

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

uname -a:

```

Linux RH5885V3 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jun 8 07:27

SPEC is set to: /spec

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  530G  13G  491G   3% /

```

Additional information from dmidecode:

```

BIOS American Megatrends Inc. BLISV035 03/7/2014
Memory:
16x 16 GB
16x Hynix HMT42GR7AFR4C-PB 16 GB 1333 MHz 2 rank
32x NO DIMM NO DIMM

```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:

16x Hynix HMT42GR7AFR4C-PB 16 GB 1333 MHz 2 rank

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1860

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

SPECint\_rate\_base2006 = 1790

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Jun-2014  
Hardware Availability: Feb-2014  
Software Availability: Nov-2013

## General Notes (Continued)

memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmarthearp

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1860

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

SPECint\_rate\_base2006 = 1790

CPU2006 license: 3175

Test date: Jun-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1860

Huawei RH5885 V3 (Intel Xeon E7-4880 v2)

SPECint\_rate\_base2006 = 1790

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Jul 25 00:11:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 July 2014.