



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®_rate2006 = 109

ASUS H97M-PLUS Motherboard (Intel Core i3-4150)

SPECint_rate_base2006 = 103

CPU2006 license: 13


Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

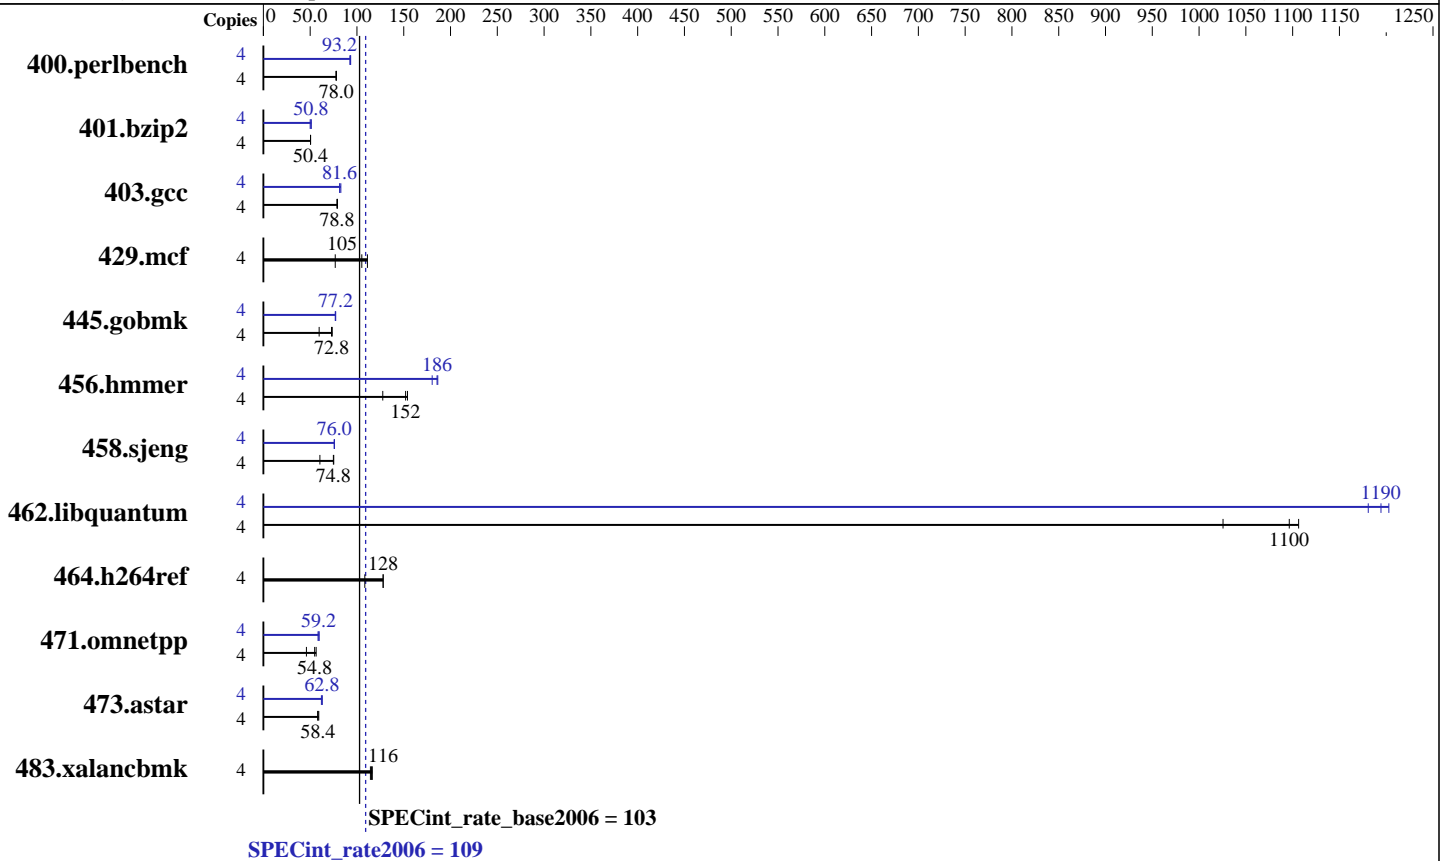

Hardware

CPU Name: Intel Core i3-4150
 CPU Characteristics: 3500
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
 Disk Subsystem: 1 TB Seagate SATA HDD, 7200 RPM
 Other Hardware: None

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 109

ASUS H97M-PLUS Motherboard (Intel Core i3-4150)

SPECint_rate_base2006 = 103

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<u>502</u>	<u>78.0</u>	500	78.0	503	77.6	4	423	92.4	<u>420</u>	<u>93.2</u>	419	93.2
401.bzip2	4	767	50.4	764	50.4	<u>765</u>	<u>50.4</u>	4	771	50.0	<u>760</u>	<u>50.8</u>	752	51.2
403.gcc	4	409	78.8	<u>408</u>	<u>78.8</u>	407	79.2	4	<u>395</u>	<u>81.6</u>	395	81.6	389	82.8
429.mcf	4	<u>346</u>	<u>105</u>	475	76.8	328	111	4	<u>346</u>	<u>105</u>	475	76.8	328	111
445.gobmk	4	572	73.6	702	59.6	<u>578</u>	<u>72.8</u>	4	543	77.2	546	76.8	<u>545</u>	<u>77.2</u>
456.hammer	4	<u>245</u>	<u>152</u>	293	128	242	154	4	207	180	<u>201</u>	<u>186</u>	200	186
458.sjeng	4	644	75.2	802	60.4	<u>646</u>	<u>74.8</u>	4	638	76.0	639	75.6	<u>638</u>	<u>76.0</u>
462.libquantum	4	<u>75.6</u>	<u>1100</u>	80.8	1030	74.9	1110	4	<u>69.4</u>	<u>1190</u>	70.2	1180	68.9	1200
464.h264ref	4	691	128	818	108	<u>692</u>	<u>128</u>	4	691	128	818	108	<u>692</u>	<u>128</u>
471.omnetpp	4	443	56.4	545	46.0	<u>456</u>	<u>54.8</u>	4	429	58.4	<u>422</u>	<u>59.2</u>	420	59.6
473.astar	4	<u>480</u>	<u>58.4</u>	483	58.0	476	59.2	4	453	62.0	<u>448</u>	<u>62.8</u>	448	62.8
483.xalancbmk	4	<u>239</u>	<u>116</u>	241	114	238	116	4	<u>239</u>	<u>116</u>	241	114	238	116

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 32-bit binaries with the command:
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.

Platform Notes

Sysinfo program C:\SPEC14.0/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt10C37B4DED4B Sat Jun 28 02:35:42 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'
OS Name : Microsoft Windows 8.1 Pro
OS Version : 6.3.9600 N/A Build 9600
System Manufacturer: ASUS
System Model : All Series
Processor(s) : 1 Processor(s) Installed.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 109

ASUS H97M-PLUS Motherboard (Intel Core i3-4150)

SPECint_rate_base2006 = 103

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Platform Notes (Continued)

[01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3500 Mhz
BIOS Version : American Megatrends Inc. 2001, 6/13/2014
Total Physical Memory: 8,005 MB

```
Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 512
L3CacheSize   : 3072
MaxClockSpeed : 3500
Name          : Intel(R) Core(TM) i3-4150 CPU @ 3.50GHz
NumberOfCores : 2
NumberOfLogicalProcessors: 4
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:
icl -Qvc10 -Qstd=c99

C++ benchmarks:
icl -Qvc10

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 109

ASUS H97M-PLUS Motherboard (Intel Core i3-4150)

SPECint_rate_base2006 = 103

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Base Optimization Flags (Continued)

C++ benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc10 -Qstd=c99

456.hmmmer: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe

458.sjeng: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe

462.libquantum: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe
-Qstd=c99

C++ benchmarks (except as noted below):

icl -Qvc10

473.astar: C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
456.hmmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 109

ASUS H97M-PLUS Motherboard (Intel Core i3-4150)

SPECint_rate_base2006 = 103

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

400.perlbench: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: basepeak = yes

445.gobmk: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

458.sjeng: -Qauto-ilp32 -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4
/F512000000

462.libquantum: -Qauto-ilp32 -QxCORE-AVX2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlw32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxCORE-AVX2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000 shlw64M.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 109

ASUS H97M-PLUS Motherboard (Intel Core i3-4150)

SPECint_rate_base2006 = 103

CPU2006 license: 13

Test date: Jun-2014

Test sponsor: Intel Corporation

Hardware Availability: Jun-2014

Tested by: Intel Corporation

Software Availability: Oct-2013

Peak Other Flags (Continued)

```
456.hmmr: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
          -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
          -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
          -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

```
458.sjeng: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
           -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

```
462.libquantum: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
                -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
                -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
                -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

C++ benchmarks:

```
473.astar: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
           -link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
           -link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jul 30 10:55:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 July 2014.