



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRi , Intel Xeon E5-2680 v3)

SPECfp<sup>®</sup>\_rate2006 = 796

SPECfp\_rate\_base2006 = 773

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

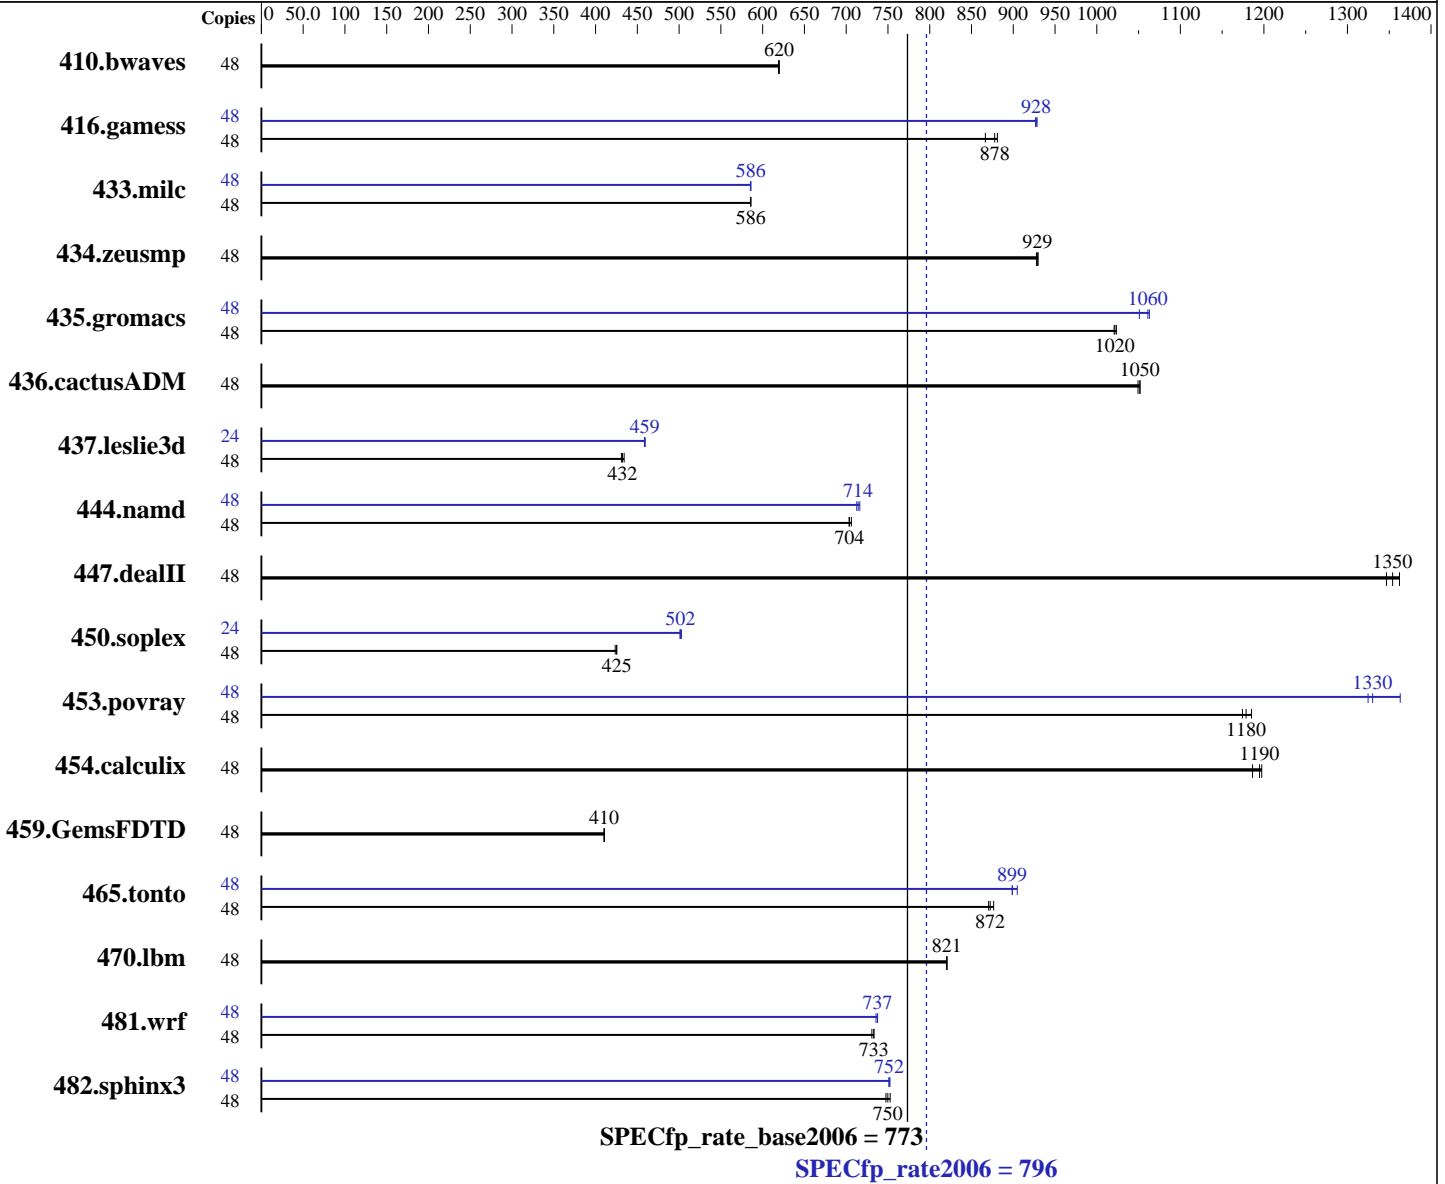

### Hardware

CPU Name: Intel Xeon E5-2680 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5, Kernel 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRi , Intel Xeon E5-2680 v3)

SPECfp\_rate2006 = 796

SPECfp\_rate\_base2006 = 773

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 2000 GB SATA III, 7200 RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1052	620	1054	619	<b>1053</b>	<b>620</b>	48	1052	620	1054	619	<b>1053</b>	<b>620</b>
416.gamess	48	1067	881	<b>1071</b>	<b>878</b>	1085	867	48	1014	927	1012	929	<b>1013</b>	<b>928</b>
433.milc	48	753	586	752	586	<b>752</b>	<b>586</b>	48	<b>752</b>	<b>586</b>	752	586	753	585
434.zeusmp	48	471	928	470	930	<b>470</b>	<b>929</b>	48	471	928	470	930	<b>470</b>	<b>929</b>
435.gromacs	48	336	1020	335	1020	<b>335</b>	<b>1020</b>	48	326	1050	322	1060	<b>323</b>	<b>1060</b>
436.cactusADM	48	547	1050	<b>545</b>	<b>1050</b>	545	1050	48	547	1050	<b>545</b>	<b>1050</b>	545	1050
437.leslie3d	48	1047	431	1039	434	<b>1044</b>	<b>432</b>	24	492	458	<b>492</b>	<b>459</b>	491	459
444.namd	48	545	706	547	703	<b>547</b>	<b>704</b>	48	537	716	540	713	<b>539</b>	<b>714</b>
447.dealII	48	<b>406</b>	<b>1350</b>	408	1350	403	1360	48	<b>406</b>	<b>1350</b>	408	1350	403	1360
450.soplex	48	<b>941</b>	<b>425</b>	941	425	945	424	24	398	503	400	501	<b>399</b>	<b>502</b>
453.povray	48	217	1170	<b>217</b>	<b>1180</b>	215	1190	48	<b>192</b>	<b>1330</b>	193	1320	187	1360
454.calculix	48	334	1190	<b>331</b>	<b>1190</b>	331	1200	48	334	1190	<b>331</b>	<b>1190</b>	331	1200
459.GemsFDTD	48	1240	411	<b>1241</b>	<b>410</b>	1242	410	48	1240	411	<b>1241</b>	<b>410</b>	1242	410
465.tonto	48	<b>541</b>	<b>872</b>	539	877	543	870	48	522	905	<b>525</b>	<b>899</b>	526	899
470.lbm	48	804	821	<b>804</b>	<b>821</b>	804	820	48	804	821	<b>804</b>	<b>821</b>	804	820
481.wrf	48	734	731	<b>731</b>	<b>733</b>	731	733	48	729	736	<b>727</b>	<b>737</b>	727	738
482.sphinx3	48	1243	753	<b>1248</b>	<b>750</b>	1251	748	48	1245	751	1243	752	<b>1245</b>	<b>752</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
COD Enable = Enabled  
Early Snoop = Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRi , Intel Xeon E5-2680 v3)

SPECfp\_rate2006 = 796

SPECfp\_rate\_base2006 = 773

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2014  
Hardware Availability: Sep-2014  
Software Availability: Nov-2013

### Platform Notes (Continued)

Enforce POR = Disabled

### General Notes

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRi , Intel Xeon E5-2680 v3)

SPECfp\_rate2006 = 796

SPECfp\_rate\_base2006 = 773

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2014  
Hardware Availability: Sep-2014  
Software Availability: Nov-2013

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRi , Intel Xeon E5-2680 v3)

SPECfp\_rate2006 = 796

SPECfp\_rate\_base2006 = 773

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2014  
Hardware Availability: Sep-2014  
Software Availability: Nov-2013

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-auto-ilp32  
470.lbm: basepeak = yes  
482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
-unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32  
447.dealII: basepeak = yes  
450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3  
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes  
416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6028R-TR  
(X10DRi , Intel Xeon E5-2680 v3)

SPECfp\_rate2006 = 796

SPECfp\_rate\_base2006 = 773

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Oct-2014  
**Hardware Availability:** Sep-2014  
**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Dec 4 10:08:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 December 2014.