



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECfp®2006 = 112**  
**SPECfp\_base2006 = 108**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

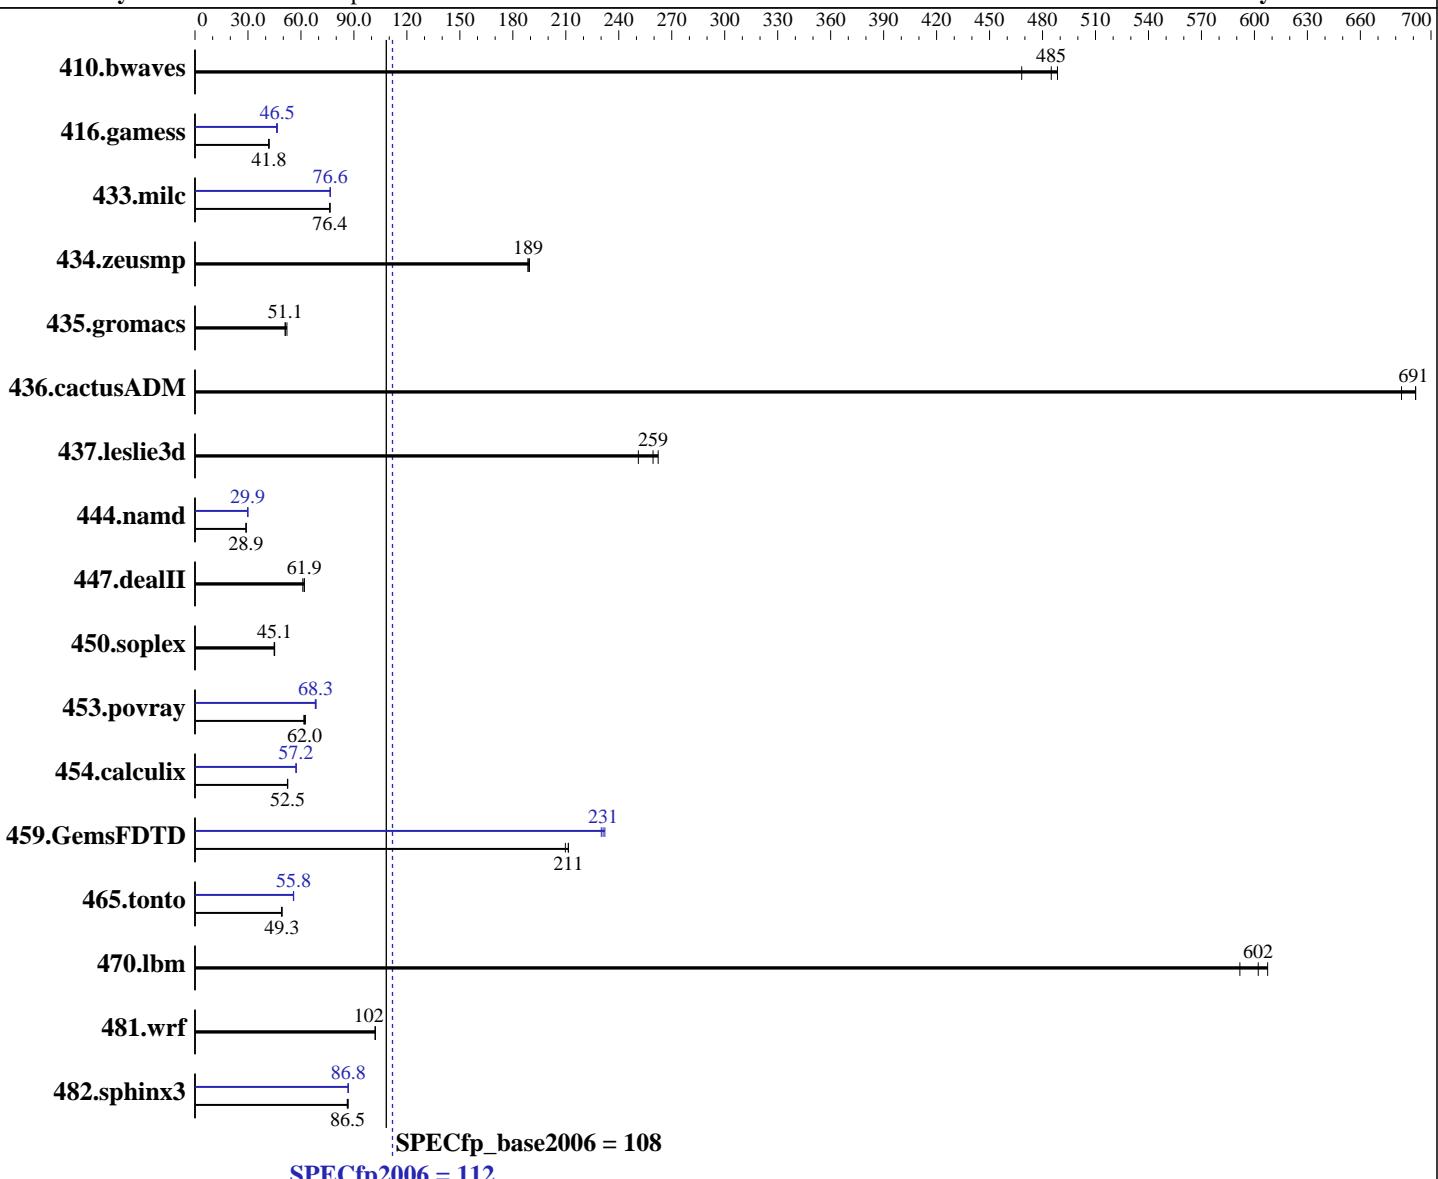

### Hardware

CPU Name: Intel Xeon E5-2643 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
CPU MHz: 3400  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
Compiler: 2.6.32-431.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: ext4

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECfp2006 = 112**

**SPECfp\_base2006 = 108**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 800 GB SATA SSD  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	27.8	488	29.0	468	<b>28.0</b>	<b>485</b>	27.8	488	29.0	468	<b>28.0</b>	<b>485</b>
416.gamess	467	42.0	<b>468</b>	<b>41.8</b>	469	41.8	<b>421</b>	<b>46.5</b>	424	46.2	420	46.6
433.milc	<b>120</b>	<b>76.4</b>	120	76.4	120	76.4	<b>120</b>	<b>76.6</b>	120	76.6	<b>120</b>	<b>76.6</b>
434.zeusmp	<b>48.2</b>	<b>189</b>	48.2	189	48.0	189	<b>48.2</b>	<b>189</b>	48.2	189	48.0	189
435.gromacs	<b>140</b>	<b>51.1</b>	137	52.1	140	51.1	<b>140</b>	<b>51.1</b>	137	52.1	140	51.1
436.cactusADM	17.5	683	17.3	691	<b>17.3</b>	<b>691</b>	17.5	683	17.3	691	<b>17.3</b>	<b>691</b>
437.leslie3d	<b>36.2</b>	<b>259</b>	37.4	251	35.8	262	<b>36.2</b>	<b>259</b>	37.4	251	35.8	262
444.namd	277	28.9	277	29.0	<b>277</b>	<b>28.9</b>	268	29.9	268	29.9	<b>268</b>	<b>29.9</b>
447.dealII	185	61.9	187	61.1	<b>185</b>	<b>61.9</b>	185	61.9	187	61.1	<b>185</b>	<b>61.9</b>
450.soplex	<b>185</b>	<b>45.1</b>	185	45.1	186	44.8	<b>185</b>	<b>45.1</b>	185	45.1	186	44.8
453.povray	<b>85.8</b>	<b>62.0</b>	86.3	61.7	85.1	62.5	<b>77.9</b>	<b>68.3</b>	78.1	68.1	77.6	68.6
454.calculix	<b>157</b>	<b>52.5</b>	157	52.5	158	52.3	<b>144</b>	<b>57.2</b>	<b>144</b>	<b>57.2</b>	144	57.3
459.GemsFDTD	50.6	210	50.2	211	<b>50.2</b>	<b>211</b>	45.7	232	<b>45.9</b>	<b>231</b>	46.1	230
465.tonto	200	49.3	201	49.0	<b>200</b>	<b>49.3</b>	177	55.7	<b>176</b>	<b>55.8</b>	176	55.9
470.lbm	23.2	592	<b>22.8</b>	<b>602</b>	22.6	607	23.2	592	<b>22.8</b>	<b>602</b>	22.6	607
481.wrf	<b>109</b>	<b>102</b>	109	102	109	102	<b>109</b>	<b>102</b>	109	102	109	102
482.sphinx3	226	86.2	225	86.8	<b>225</b>	<b>86.5</b>	<b>224</b>	<b>86.8</b>	225	86.6	224	86.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Cluster On Die set to Disabled

Early Snoop set to Disabled

Performance Profile set to Custom

C1E Support set to Disabled

Core C3 set to Disabled

Core C6 set to Disabled

Thermal Profile set to Max Performance

Memory Power Savings set to Disabled

Sysinfo program /usr/cpu2006/config/sysinfo.rev6818

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECfp2006 =**

**112**

**SPECfp\_base2006 =**

**108**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

## Platform Notes (Continued)

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on TD350 Wed Oct 22 21:26:00 2014

This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2643 v3 @ 3.40GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings   : 12
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264414648 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux TD350 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 22 21:25
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  730G  13G  680G  2%  /
```

Additional information from dmidecode:

BIOS LENOVO TB5TS110 10/06/2014

Memory:

16x 16 GB
2x Hynix Semiconductor HMA42GR7MFR4N-TF 16 GB 2133 MHz 2 rank
14x Hynix Semiconductor HMA42GR7MFR4N-TFTD 16 GB 2133 MHz 2 rank

(End of data from sysinfo program)

TD350 support 4 channels and 8 DIMMs per processor, total 8 channels and  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECfp2006 =** 112

**SPECfp\_base2006 =** 108

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

## Platform Notes (Continued)

16 DIMMs. All 16 DIMM slots installed with 16 GB DIMM for this run.

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

Fortran benchmarks:

    ifort -m64

Benchmarks using both Fortran and C:

    icc -m64 ifort -m64

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECfp2006 = 112**

**SPECfp\_base2006 = 108**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2013

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECfp2006 =**

**112**

**SPECfp\_base2006 =**

**108**

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TD350 (Intel Xeon E5-2643 v3,  
3.40 GHz)

**SPECfp2006 =** 112

**SPECfp\_base2006 =** 108

**CPU2006 license:** 9017

**Test date:** Oct-2014

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Sep-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revB.20141118.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revB.20141118.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 18 16:33:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 November 2014.