



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M, Intel Core i5-6600K)

SPECfp®_rate2006 = 181

SPECfp_rate_base2006 = 177

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2014

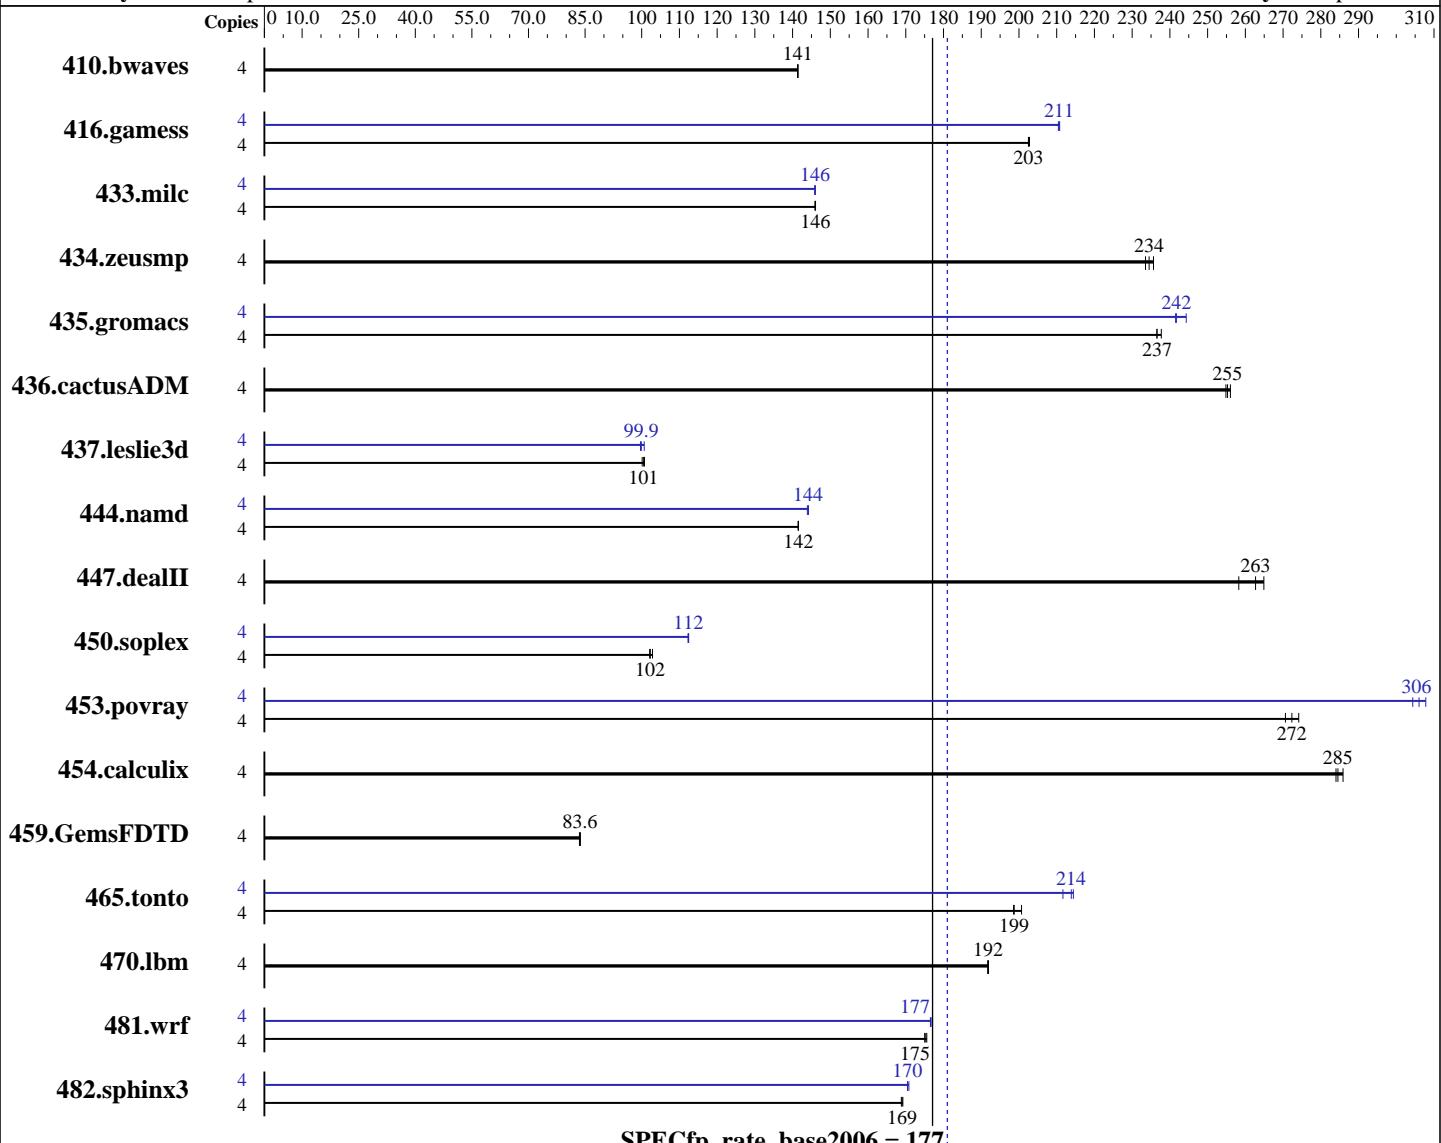

Hardware

CPU Name: Intel Core i5-6600K
CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
CPU MHz: 3500
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86_64
Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M, Intel Core i5-6600K)

SPECfp_rate2006 = 181

SPECfp_rate_base2006 = 177

CPU2006 license: 001176

Test date: Oct-2015

Test sponsor: Supermicro

Hardware Availability: Sep-2015

Tested by: Supermicro

Software Availability: Sep-2014

L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (4 x 4 GB 1Rx8 PC4-2666P-U, running at 2133 MHz)
Disk Subsystem:	1 x 200 GB SATA III SSD
Other Hardware:	None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	385	141	384	141	<u>384</u>	<u>141</u>	4	385	141	384	141	<u>384</u>	<u>141</u>
416.gamess	4	386	203	<u>387</u>	<u>203</u>	387	202	4	<u>372</u>	<u>211</u>	372	210	<u>372</u>	<u>211</u>
433.milc	4	251	146	252	146	<u>251</u>	<u>146</u>	4	<u>252</u>	<u>146</u>	251	146	<u>252</u>	<u>146</u>
434.zeusmp	4	<u>155</u>	<u>234</u>	156	234	154	236	4	<u>155</u>	<u>234</u>	156	234	<u>154</u>	<u>236</u>
435.gromacs	4	<u>121</u>	<u>237</u>	120	238	121	237	4	117	244	118	242	<u>118</u>	<u>242</u>
436.cactusADM	4	188	255	<u>187</u>	<u>255</u>	187	256	4	188	255	<u>187</u>	<u>255</u>	187	256
437.leslie3d	4	<u>374</u>	<u>101</u>	373	101	376	100	4	377	99.7	<u>376</u>	<u>99.9</u>	373	101
444.namd	4	<u>227</u>	<u>142</u>	227	141	227	142	4	222	144	<u>223</u>	<u>144</u>	223	144
447.dealII	4	173	265	<u>174</u>	<u>263</u>	177	258	4	173	265	<u>174</u>	<u>263</u>	177	258
450.soplex	4	<u>326</u>	<u>102</u>	327	102	324	103	4	297	112	297	112	<u>297</u>	<u>112</u>
453.povray	4	78.6	271	77.6	274	<u>78.1</u>	<u>272</u>	4	69.9	304	<u>69.5</u>	<u>306</u>	69.1	308
454.calculix	4	116	284	115	286	<u>116</u>	<u>285</u>	4	116	284	115	286	<u>116</u>	<u>285</u>
459.GemsFDTD	4	508	83.5	507	83.8	<u>507</u>	<u>83.6</u>	4	508	83.5	507	83.8	<u>507</u>	<u>83.6</u>
465.tonto	4	<u>198</u>	<u>199</u>	198	199	196	201	4	<u>184</u>	<u>214</u>	184	214	<u>186</u>	<u>212</u>
470.lbm	4	286	192	287	192	<u>287</u>	<u>192</u>	4	286	192	287	192	<u>287</u>	<u>192</u>
481.wrf	4	255	175	<u>255</u>	<u>175</u>	254	176	4	<u>253</u>	<u>177</u>	253	177	<u>253</u>	<u>177</u>
482.sphinx3	4	461	169	462	169	<u>461</u>	<u>169</u>	4	456	171	<u>457</u>	<u>170</u>	457	170

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M, Intel Core i5-6600K)

SPECfp_rate2006 = 181

SPECfp_rate_base2006 = 177

CPU2006 license: 001176

Test date: Oct-2015

Test sponsor: Supermicro

Hardware Availability: Sep-2015

Tested by: Supermicro

Software Availability: Sep-2014

Platform Notes

As tested, the system used a Supermicro CSE-731i-300B chassis.

The chassis is configured with a PWS-305-PQ power supply, 1 SNK-P0046A4 heatsink, as well as 1 FAN-0108L4 rear cooling fan.

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on C7Z170-01 Tue Oct 20 07:46:49 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Core(TM) i5-6600K CPU @ 3.50GHz
        1 "physical id"s (chips)
        4 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 4
        siblings : 4
        physical 0: cores 0 1 2 3
    cache size : 6144 KB
```

```
From /proc/meminfo
    MemTotal:       16334556 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.1 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.1"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux C7Z170-01 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 20 01:58

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda2        xfs   183G   24G  159G  13% /
Additional information from dmidecode:
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M, Intel Core i5-6600K)

SPECfp_rate2006 = 181

SPECfp_rate_base2006 = 177

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2014

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. T20151015150001 10/15/2015

Memory:

4x 0420 F4-2666C15-4GRR 4 GB 1 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M, Intel Core i5-6600K)

SPECfp_rate2006 = 181

SPECfp_rate_base2006 = 177

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2014

Base Portability Flags (Continued)

```
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M, Intel Core i5-6600K)

SPECfp_rate2006 = 181

SPECfp_rate_base2006 = 177

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2014

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
    -auto-ilp32

```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xCORE-AVX2 -prof-gen(pass 1) -ipo -O3 -no-prec-div
    -prof-use(pass 2) -unroll2
```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
    -fno-alias -auto-ilp32

```

```
447.dealII: basepeak = yes
```

```
450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
    -opt-malloc-options=3
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
    -ansi-alias
```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-M motherboard
(C7Z170-M, Intel Core i5-6600K)

SPECfp_rate2006 = 181

SPECfp_rate_base2006 = 177

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 17 19:14:24 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 November 2015.