



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

SPECint®_rate2006 = 714

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint_rate_base2006 = 679

CPU2006 license: 9066


Test date: May-2016

Test sponsor: H3C

Hardware Availability: May-2016

Tested by: H3C

Software Availability: May-2016

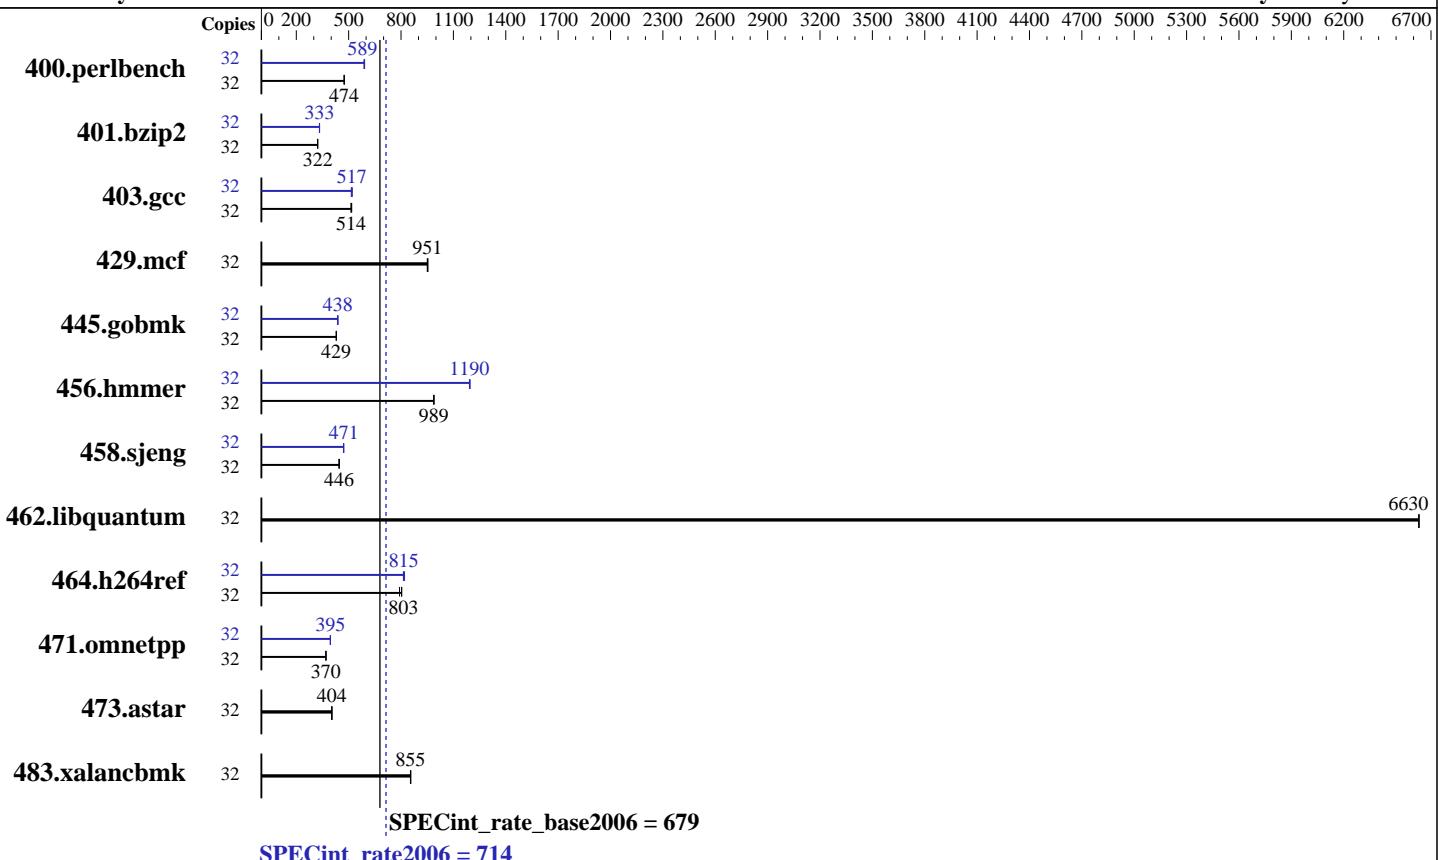

Hardware

CPU Name:	Intel Xeon E5-2620 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem:	1 x 600 GB SATA 15KRPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

SPECint_rate2006 = 714

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint_rate_base2006 = 679

CPU2006 license: 9066

Test date: May-2016

Test sponsor: H3C

Hardware Availability: May-2016

Tested by: H3C

Software Availability: May-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	659	475	659	474	659	474	32	532	588	530	589	529	592
401.bzip2	32	958	322	958	322	958	322	32	927	333	929	332	927	333
403.gcc	32	498	517	501	514	501	514	32	495	521	498	517	500	515
429.mcf	32	306	954	307	951	307	951	32	306	954	307	951	307	951
445.gobmk	32	782	429	782	429	782	429	32	766	438	768	437	766	438
456.hammer	32	303	987	302	989	302	989	32	250	1200	251	1190	250	1190
458.sjeng	32	869	446	868	446	870	445	32	820	472	821	471	823	470
462.libquantum	32	100	6630	100	6630	100	6630	32	100	6630	100	6630	100	6630
464.h264ref	32	882	803	895	791	881	804	32	870	814	864	820	869	815
471.omnetpp	32	540	370	541	370	541	370	32	506	395	506	395	506	395
473.astar	32	556	404	558	403	555	405	32	556	404	558	403	555	405
483.xalancbmk	32	258	855	259	854	258	856	32	258	855	259	854	258	856

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

COD set to Disabled

Early snoop set to Enabled

Sysinfo program /usr/spec2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-fu04 Wed May 11 21:00:55 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
  2 "physical id"s (chips)
  32 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

SPECint_rate2006 = 714

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint_rate_base2006 = 679

CPU2006 license: 9066

Test date: May-2016

Test sponsor: H3C

Hardware Availability: May-2016

Tested by: H3C

Software Availability: May-2016

Platform Notes (Continued)

```
caution.)  
    cpu cores : 8  
    siblings   : 16  
    physical 0: cores 0 1 2 3 4 5 6 7  
    physical 1: cores 0 1 2 3 4 5 6 7  
    cache size : 20480 KB  
  
From /proc/meminfo  
MemTotal:      264359948 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
/usr/bin/lsb_release -d  
  SUSE Linux Enterprise Server 12 SP1  
  
From /etc/*release* /etc/*version*  
SuSE-release:  
  SUSE Linux Enterprise Server 12 (x86_64)  
  VERSION = 12  
  PATCHLEVEL = 1  
  # This file is deprecated and will be removed in a future service pack or  
  release.  
  # Please check /etc/os-release for details about this release.  
os-release:  
  NAME="SLES"  
  VERSION="12-SP1"  
  VERSION_ID="12.1"  
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"  
  ID="sles"  
  ANSI_COLOR="0;32"  
  CPE_NAME="cpe:/o:suse:sles:12:sp1"  
  
uname -a:  
Linux linux-fu04 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015  
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 May 11 20:59  
  
SPEC is set to: /usr/spec2006  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
 /dev/sdal      xfs   400G   17G  384G   5% /  
Additional information from dmidecode:  
  
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.  
  
BIOS American Megatrends Inc. 1.00.09 05/11/2016  
Memory:  
16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at  
2133 MHz
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

SPECint_rate2006 = 714

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint_rate_base2006 = 679

CPU2006 license: 9066

Test date: May-2016

Test sponsor: H3C

Hardware Availability: May-2016

Tested by: H3C

Software Availability: May-2016

Platform Notes (Continued)

8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/usr/spec2006/libs/32:/usr/spec2006/libs/64:/usr/spec2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -D_FILE_OFFSET_BITS=64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmr: -D_FILE_OFFSET_BITS=64

458.sjeng: -D_FILE_OFFSET_BITS=64

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

SPECint_rate2006 = 714

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint_rate_base2006 = 679

CPU2006 license: 9066

Test date: May-2016

Test sponsor: H3C

Hardware Availability: May-2016

Tested by: H3C

Software Availability: May-2016

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64  
403.gcc: -D_FILE_OFFSET_BITS=64  
429.mcf: -D_FILE_OFFSET_BITS=64  
445.gobmk: -D_FILE_OFFSET_BITS=64  
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64  
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64  
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX  
464.h264ref: -D_FILE_OFFSET_BITS=64  
471.omnetpp: -D_FILE_OFFSET_BITS=64  
473.astar: -D_FILE_OFFSET_BITS=64  
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

SPECint_rate2006 = 714

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint_rate_base2006 = 679

CPU2006 license: 9066

Test date: May-2016

Test sponsor: H3C

Hardware Availability: May-2016

Tested by: H3C

Software Availability: May-2016

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

H3C

H3C UIS R390x G2 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint_rate2006 = 714

SPECint_rate_base2006 = 679

CPU2006 license: 9066

Test sponsor: H3C

Tested by: H3C

Test date: May-2016

Hardware Availability: May-2016

Software Availability: May-2016

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/H3C-Platform-Settings-V1.2-BDW-revB.html>
<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/H3C-Platform-Settings-V1.2-BDW-revB.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jun 1 19:09:34 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 June 2016.