



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>\_rate2006 = 967

Huawei RH2288 V3 (Intel Xeon E5-2683 v4)

SPECfp\_rate\_base2006 = 943

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

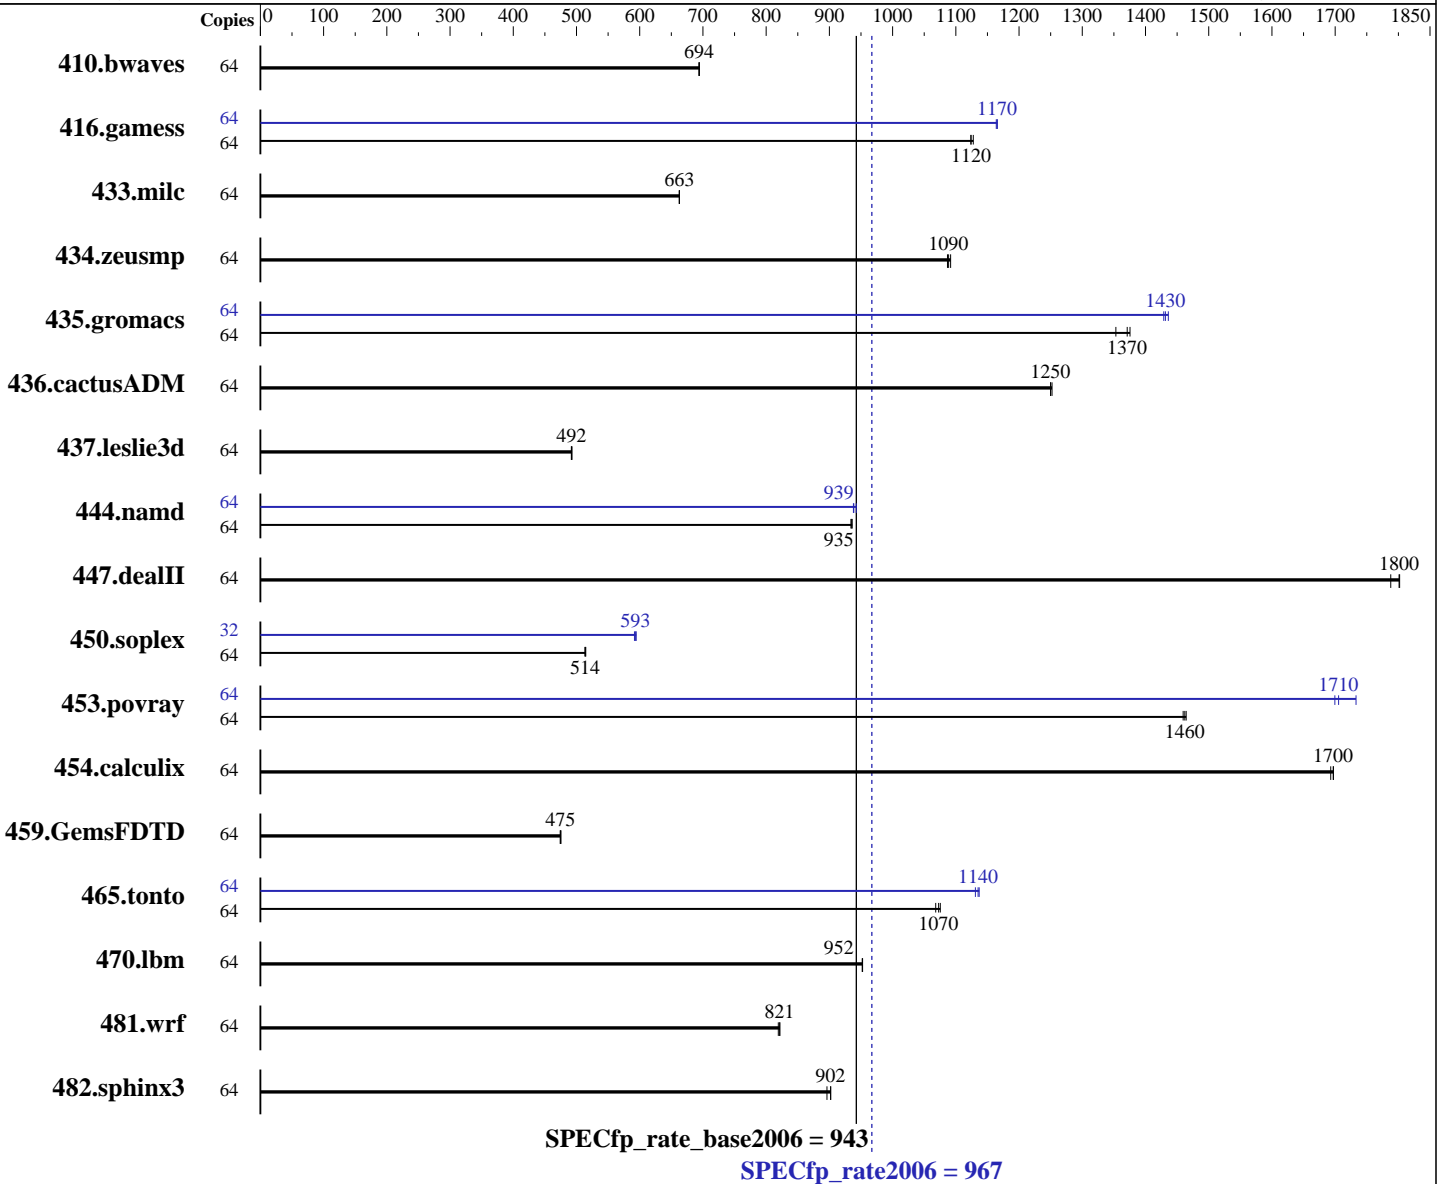

### Hardware

CPU Name: Intel Xeon E5-2683 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Huawei

SPECfp\_rate2006 = **967**

Huawei RH2288 V3 (Intel Xeon E5-2683 v4)

SPECfp\_rate\_base2006 = **943**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

L3 Cache: 40 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1253	694	<u>1253</u>	<u>694</u>	1254	694	64	1253	694	<u>1253</u>	<u>694</u>	1254	694
416.gamess	64	1111	1130	1115	1120	<u>1115</u>	<u>1120</u>	64	1077	1160	1075	1170	<u>1075</u>	<u>1170</u>
433.milc	64	886	663	887	663	<u>887</u>	<u>663</u>	64	886	663	887	663	<u>887</u>	<u>663</u>
434.zeusmp	64	<u>535</u>	<u>1090</u>	533	1090	536	1090	64	<u>535</u>	<u>1090</u>	533	1090	536	1090
435.gromacs	64	<u>333</u>	<u>1370</u>	338	1350	332	1380	64	318	1440	<u>319</u>	<u>1430</u>	320	1430
436.cactusADM	64	<u>612</u>	<u>1250</u>	612	1250	611	1250	64	<u>612</u>	<u>1250</u>	612	1250	611	1250
437.leslie3d	64	<u>1223</u>	<u>492</u>	1223	492	1220	493	64	<u>1223</u>	<u>492</u>	1223	492	1220	493
444.namd	64	548	936	550	934	<u>549</u>	<u>935</u>	64	545	943	<u>547</u>	<u>939</u>	547	938
447.dealII	64	406	1800	410	1790	<u>407</u>	<u>1800</u>	64	406	1800	410	1790	<u>407</u>	<u>1800</u>
450.soplex	64	1037	515	1040	513	<u>1038</u>	<u>514</u>	32	449	594	<u>450</u>	<u>593</u>	451	592
453.povray	64	233	1460	233	1460	<u>233</u>	<u>1460</u>	64	200	1700	<u>200</u>	<u>1710</u>	196	1730
454.calculix	64	311	1700	<u>311</u>	<u>1700</u>	312	1690	64	311	1700	<u>311</u>	<u>1700</u>	312	1690
459.GemsFDTD	64	<u>1431</u>	<u>475</u>	1432	474	1428	476	64	<u>1431</u>	<u>475</u>	1432	474	1428	476
465.tonto	64	590	1070	<u>587</u>	<u>1070</u>	586	1080	64	<u>555</u>	<u>1140</u>	554	1140	557	1130
470.lbm	64	<u>924</u>	<u>952</u>	924	952	923	953	64	<u>924</u>	<u>952</u>	924	952	923	953
481.wrf	64	870	822	873	819	<u>870</u>	<u>821</u>	64	870	822	873	819	<u>870</u>	<u>821</u>
482.sphinx3	64	1392	896	<u>1383</u>	<u>902</u>	1383	902	64	1392	896	<u>1383</u>	<u>902</u>	1383	902

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Set Snoop Mode to COD mode

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 967

Huawei RH2288 V3 (Intel Xeon E5-2683 v4)

SPECfp\_rate\_base2006 = 943

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

## Platform Notes (Continued)

```
Set Patrol Scrub to Disable
Sysinfo program /spec/spec16/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 # $ e3fbb8667b5a285932ceab81e28219e1
running on linux-c3qu Fri Oct 28 06:58:38 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2683 v4 @ 2.10GHz
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 16
  siblings  : 32
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264056240 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-c3qu 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 25 09:24

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 967

Huawei RH2288 V3 (Intel Xeon E5-2683 v4)

SPECfp\_rate\_base2006 = 943

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Oct-2016  
Hardware Availability: Mar-2016  
Software Availability: Mar-2016

## Platform Notes (Continued)

SPEC is set to: /spec/spec16

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	641G	120G	522G	19%	/spec

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 3.31 08/22/2016

Memory:

16x Samsung M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/spec/spec16/libs/32:/spec/spec16/libs/64:/spec/spec16/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 967

Huawei RH2288 V3 (Intel Xeon E5-2683 v4)

SPECfp\_rate\_base2006 = 943

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 967

Huawei RH2288 V3 (Intel Xeon E5-2683 v4)

SPECfp\_rate\_base2006 = 943

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Oct-2016  
Hardware Availability: Mar-2016  
Software Availability: Mar-2016

## Peak Compiler Invocation (Continued)

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -D\_FILE\_OFFSET\_BITS=64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes  
470.lbm: basepeak = yes  
482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32  
447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 967

Huawei RH2288 V3 (Intel Xeon E5-2683 v4)

SPECfp\_rate\_base2006 = 943

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

## Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp\_rate2006 = 967

Huawei RH2288 V3 (Intel Xeon E5-2683 v4)

SPECfp\_rate\_base2006 = 943

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Nov 15 16:07:22 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 November 2016.