



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8168, 2.70 GHz)

**SPECfp\_rate2006 = 3330**

**SPECfp\_rate\_base2006 = 3220**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2016

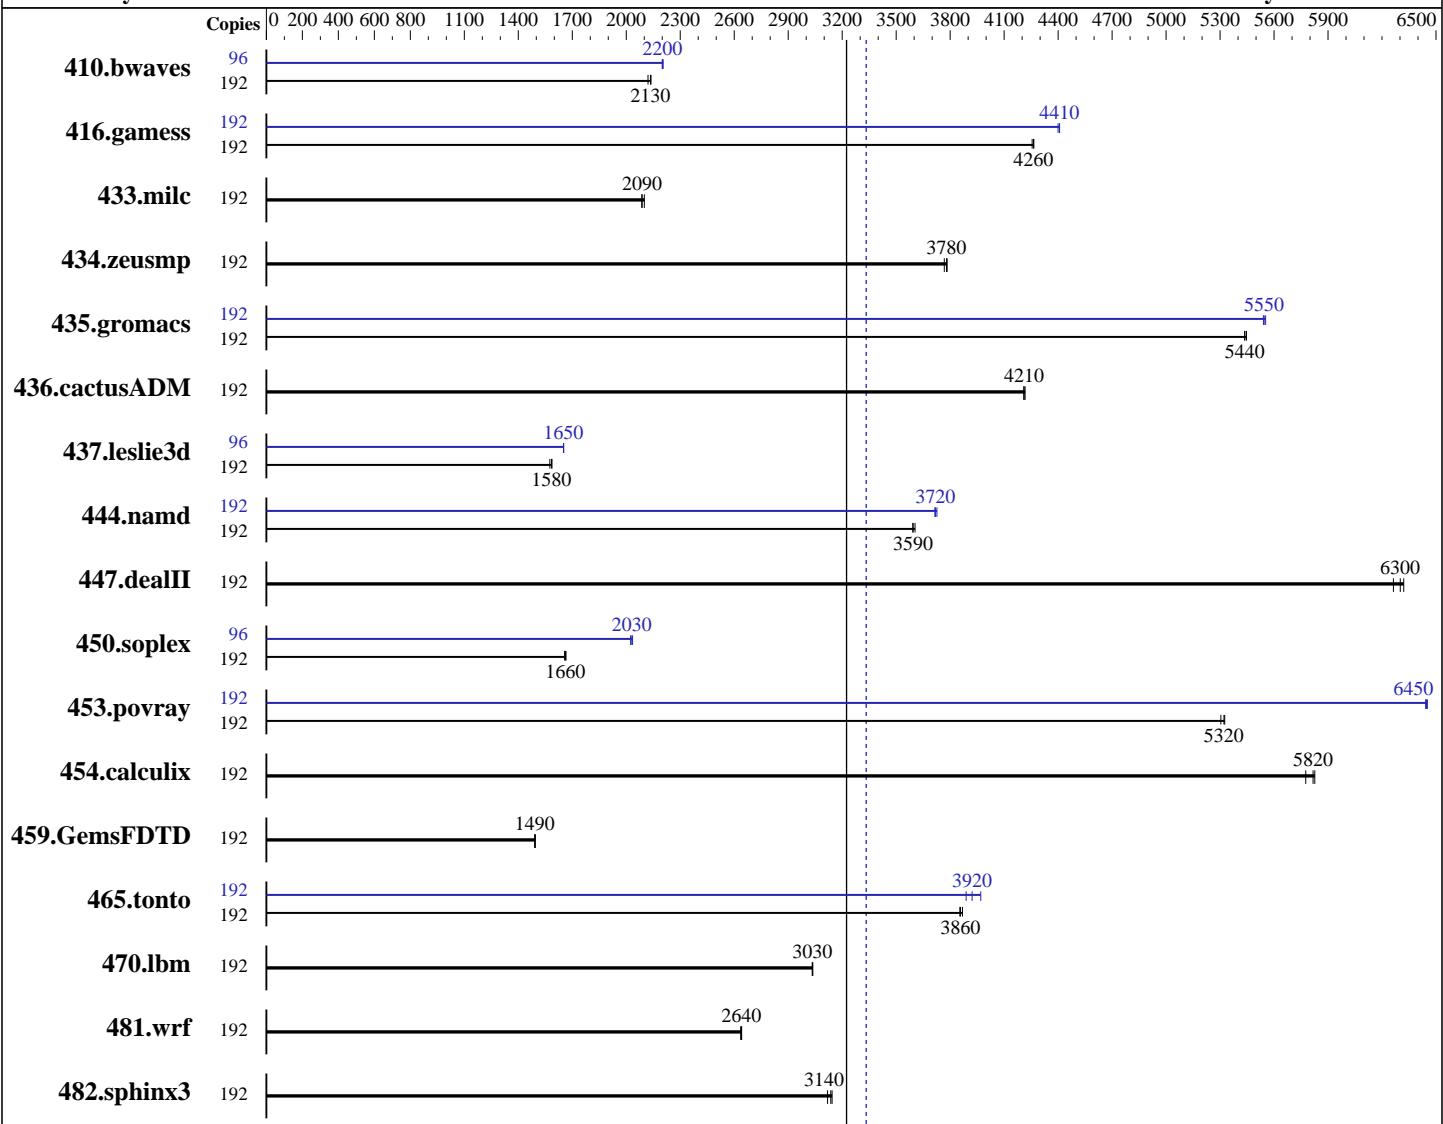

**SPECfp\_rate\_base2006 = 3220**

**SPECfp\_rate2006 = 3330**

## Hardware

CPU Name: Intel Xeon Platinum 8168  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 96 cores, 4 chips, 24 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8168, 2.70 GHz)

**SPECfp\_rate2006 = 3330**

**SPECfp\_rate\_base2006 = 3220**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** May-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Nov-2016

L3 Cache:	33 MB I+D on chip per chip
Other Cache:	None
Memory:	768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem:	1 x 960 GB SATA SSD
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	192	<b>1222</b>	<b>2130</b>	1230	2120	1221	2140	96	593	2200	592	2210	<b>593</b>	<b>2200</b>
416.gamess	192	883	4260	<b>882</b>	<b>4260</b>	881	4260	192	853	4410	<b>853</b>	<b>4410</b>	854	4400
433.milc	192	845	2090	839	2100	<b>844</b>	<b>2090</b>	192	845	2090	839	2100	<b>844</b>	<b>2090</b>
434.zeusmp	192	464	3770	<b>462</b>	<b>3780</b>	462	3780	192	464	3770	<b>462</b>	<b>3780</b>	462	3780
435.gromacs	192	252	5440	<b>252</b>	<b>5440</b>	252	5450	192	247	5550	<b>247</b>	<b>5550</b>	247	5540
436.cactusADM	192	545	4210	544	4220	<b>545</b>	<b>4210</b>	192	545	4210	544	4220	<b>545</b>	<b>4210</b>
437.leslie3d	192	1137	1590	1146	1580	<b>1139</b>	<b>1580</b>	96	<b>547</b>	<b>1650</b>	546	1650	547	1650
444.namd	192	427	3600	<b>428</b>	<b>3590</b>	429	3590	192	414	3720	<b>414</b>	<b>3720</b>	413	3730
447.dealII	192	351	6260	348	6320	<b>349</b>	<b>6300</b>	192	351	6260	348	6320	<b>349</b>	<b>6300</b>
450.soplex	192	<b>963</b>	<b>1660</b>	966	1660	962	1660	96	393	2040	396	2020	<b>394</b>	<b>2030</b>
453.povray	192	192	5330	193	5300	<b>192</b>	<b>5320</b>	192	<b>158</b>	<b>6450</b>	159	6440	158	6450
454.calculix	192	<b>272</b>	<b>5820</b>	274	5780	272	5830	192	<b>272</b>	<b>5820</b>	274	5780	272	5830
459.GemsFDTD	192	1366	1490	1363	1490	<b>1365</b>	<b>1490</b>	192	1366	1490	1363	1490	<b>1365</b>	<b>1490</b>
465.tonto	192	488	3870	490	3850	<b>490</b>	<b>3860</b>	192	476	3970	<b>482</b>	<b>3920</b>	486	3890
470.lbm	192	<b>869</b>	<b>3030</b>	870	3030	869	3040	192	<b>869</b>	<b>3030</b>	870	3030	869	3040
481.wrf	192	814	2640	<b>812</b>	<b>2640</b>	812	2640	192	814	2640	<b>812</b>	<b>2640</b>	812	2640
482.sphinx3	192	1190	3140	<b>1193</b>	<b>3140</b>	1200	3120	192	1190	3140	<b>1193</b>	<b>3140</b>	1200	3120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:

Sub NUMA Cluster enabled

Virtualization Technology disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8168, 2.70 GHz)

**SPECfp\_rate2006 = 3330**

**SPECfp\_rate\_base2006 = 3220**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** May-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Nov-2016

## Platform Notes (Continued)

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /home/cpu2006-1.2\_icl7u3/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-kj6v Fri May 19 16:43:06 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz
        4 "physical id"s (chips)
        192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 24
    siblings : 48
    physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
    27 28 29
    physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
    27 28 29
    physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
    27 28 29
    physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
    27 28 29
cache size : 33792 KB
```

From /proc/meminfo

```
MemTotal:      791001148 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 12 SP2
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 2
        # This file is deprecated and will be removed in a future service pack or
        release.
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8168, 2.70 GHz)

**SPECfp\_rate2006 = 3330**

**SPECfp\_rate\_base2006 = 3220**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** May-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Nov-2016

## Platform Notes (Continued)

```
# Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-kj6v 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 19 06:32 last=5

SPEC is set to: /home/cpu2006-1.2_ic17u3
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda4        xfs   796G  5.1G  791G   1% /home
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.5.8 05/12/2017
Memory:
 48x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2\_ic17u3/lib/ia32:/home/cpu2006-1.2\_ic17u3/lib/intel64:/home/cpu2006-1.2\_ic17u3/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8168, 2.70 GHz)

**SPECfp\_rate2006 = 3330**

**SPECfp\_rate\_base2006 = 3220**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** May-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Nov-2016

## Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.games: `-DSPEC_CPU_LP64`  
    433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
437.leslie3d: `-DSPEC_CPU_LP64`  
    444.namd: `-DSPEC_CPU_LP64`  
    447.dealII: `-DSPEC_CPU_LP64`  
    450.soplex: `-DSPEC_CPU_LP64`  
    453.povray: `-DSPEC_CPU_LP64`  
    454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
459.GemsFDTD: `-DSPEC_CPU_LP64`  
    465.tonto: `-DSPEC_CPU_LP64`  
    470.lbm: `-DSPEC_CPU_LP64`  
    481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`  
482.sphinx3: `-DSPEC_CPU_LP64`

## Base Optimization Flags

C benchmarks:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3`

C++ benchmarks:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3`

Fortran benchmarks:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch`

Benchmarks using both Fortran and C:

`-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3`



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8168, 2.70 GHz)

**SPECfp\_rate2006 = 3330**

**SPECfp\_rate\_base2006 = 3220**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2016

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
437.leslie3d: `-DSPEC_CPU_LP64`  
444.namd: `-DSPEC_CPU_LP64`  
447.dealII: `-DSPEC_CPU_LP64`  
450.soplex: `-D_FILE_OFFSET_BITS=64`  
453.povray: `-DSPEC_CPU_LP64`  
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
459.GemsFDTD: `-DSPEC_CPU_LP64`  
465.tonto: `-DSPEC_CPU_LP64`  
470.lbm: `-DSPEC_CPU_LP64`  
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`  
482.sphinx3: `-DSPEC_CPU_LP64`

## Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8168, 2.70 GHz)

**SPECfp\_rate2006 = 3330**

**SPECfp\_rate\_base2006 = 3220**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** May-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Nov-2016

## Peak Optimization Flags (Continued)

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32  
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8168, 2.70 GHz)

**SPECfp\_rate2006 = 3330**

**SPECfp\_rate\_base2006 = 3220**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** May-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Nov-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jul 12 12:12:46 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 July 2017.