



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 163

CPU2017 License: 9017


Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

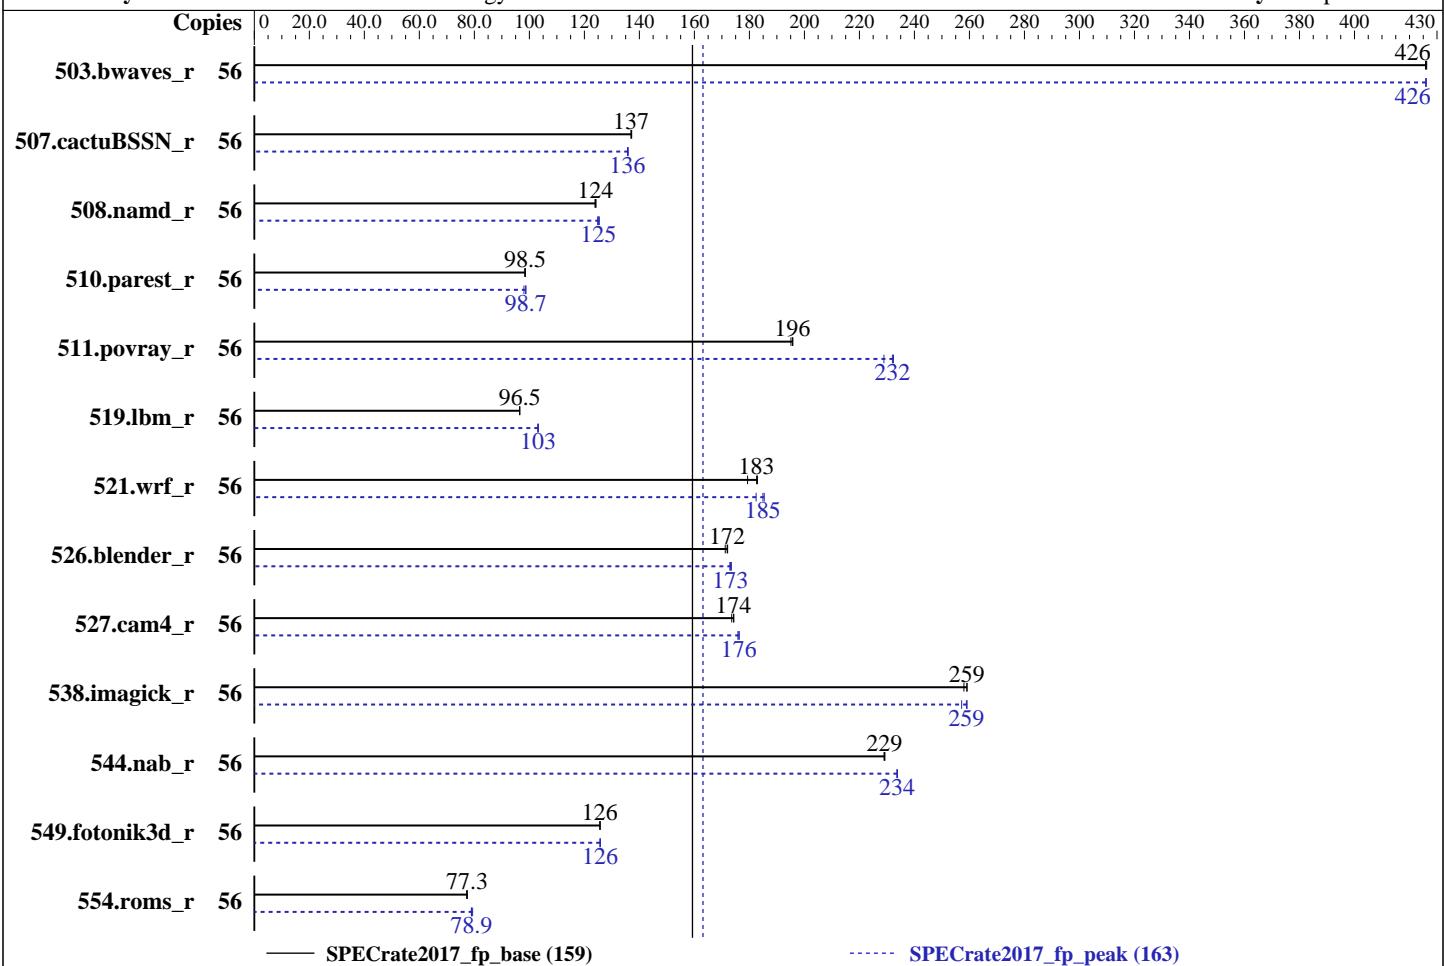

— SPECrate2017_fp_base (159)

····· SPECrate2017_fp_peak (163)

Hardware

CPU Name: Intel Xeon Gold 6132
Max MHz.: 3700
Nominal: 2600
Enabled: 28 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 19.25 MB I+D on chip per chip
Other: None
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
Storage: 1 x 800 GB SAS SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64)
Kernel 4.4.114-92.64-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran
Compiler for Linux
Parallel: No
Firmware: Lenovo BIOS Version TEE121Q 1.30 released Feb-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 163

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	56	1317	426	1318	426	1319	426	56	1318	426	1318	426	1318	426
507.cactuBSSN_r	56	518	137	517	137	517	137	56	521	136	522	136	522	136
508.namd_r	56	429	124	430	124	428	124	56	426	125	424	125	425	125
510.parest_r	56	1488	98.5	1490	98.3	1487	98.5	56	1494	98.0	1485	98.7	1484	98.7
511.povray_r	56	668	196	668	196	670	195	56	564	232	563	232	571	229
519.lbm_r	56	612	96.4	612	96.5	612	96.5	56	572	103	573	103	572	103
521.wrf_r	56	699	179	687	183	686	183	56	688	182	677	185	678	185
526.blender_r	56	496	172	498	171	496	172	56	492	173	493	173	493	173
527.cam4_r	56	562	174	564	174	562	174	56	557	176	556	176	556	176
538.imagick_r	56	538	259	537	259	540	258	56	537	259	542	257	538	259
544.nab_r	56	412	229	411	229	411	229	56	403	234	403	234	403	234
549.fotonik3d_r	56	1736	126	1737	126	1736	126	56	1736	126	1735	126	1736	126
554.roms_r	56	1150	77.4	1152	77.2	1150	77.3	56	1127	78.9	1127	78.9	1121	79.4

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 163

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 163

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enable

Hardware Prefetcher set to Disable

MONITOR/MWAIT set to Enable

Execute Disable Bit set to Disable

Intel Virtualization Technology set to Disable

DCA set to Enable

Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on Stark-02 Mon Apr 9 02:40:21 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz
  2 "physical id"s (chips)
  56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 14
  siblings : 28
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                56
On-line CPU(s) list:  0-55
Thread(s) per core:   2
Core(s) per socket:   14
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 163

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

Model: 85
Model name: Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz
Stepping: 4
CPU MHz: 2593.922
BogoMIPS: 5187.84
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 19712K
NUMA node0 CPU(s): 0-3,7-9,28-31,35-37
NUMA node1 CPU(s): 4-6,10-13,32-34,38-41
NUMA node2 CPU(s): 14-17,21-23,42-45,49-51
NUMA node3 CPU(s): 18-20,24-27,46-48,52-55
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm intel_pt rsb_ctxtsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc cqmq_occup_llc

/proc/cpuinfo cache data
cache size : 19712 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 28 29 30 31 35 36 37
node 0 size: 96357 MB
node 0 free: 96085 MB
node 1 cpus: 4 5 6 10 11 12 13 32 33 34 38 39 40 41
node 1 size: 96753 MB
node 1 free: 96537 MB
node 2 cpus: 14 15 16 17 21 22 23 42 43 44 45 49 50 51
node 2 size: 96753 MB
node 2 free: 96496 MB
node 3 cpus: 18 19 20 24 25 26 27 46 47 48 52 53 54 55
node 3 size: 96750 MB
node 3 free: 96530 MB
node distances:
node    0    1    2    3
  0: 10   11   21   21
  1: 11   10   21   21
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 163

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

```
2: 21 21 10 11
3: 21 21 11 10
```

```
From /proc/meminfo
MemTotal:      395893232 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux Stark-02 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 9 02:23
```

```
SPEC is set to: /home/cpu2017.1.0.2.ic18.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   689G  8.6G  681G   2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE121Q-1.30]- 02/07/2018

Memory:

```
4x NO DIMM NO DIMM
12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666
```

(End of data from sysinfo program)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 163

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Compiler Version Notes

=====

CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)

=====

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 519.lbm_r(peak) 544.nab_r(peak)

=====

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CXXC 508.namd_r(base) 510.parest_r(base)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CXXC 508.namd_r(peak) 510.parest_r(peak)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray_r(base) 526.blender_r(base)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray_r(peak) 526.blender_r(peak)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 163

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Compiler Version Notes (Continued)

FC 507.cactubSSN_r(base)

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

FC 507.cactubSSN_r(peak)

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

FC 554.roms_r(peak)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

CC 521.wrf_r(base) 527.cam4_r(base)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

CC 521.wrf_r(peak) 527.cam4_r(peak)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 163

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Compiler Version Notes (Continued)

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.60 GHz, Intel Xeon Gold 6132)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 163

Test Date: Apr-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 163

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.60 GHz, Intel Xeon Gold 6132)

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 163

CPU2017 License: 9017

Test Date: Apr-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD530
(2.60 GHz, Intel Xeon Gold 6132)

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

SPECrate2017_fp_base = 159

SPECrate2017_fp_peak = 163

Test Date: Apr-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-SKL-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-SKL-C.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-04-08 14:40:20-0400.

Report generated on 2018-10-31 17:34:02 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.