



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7351)

**SPECrate2017\_fp\_base = 190**

**SPECrate2017\_fp\_peak = 188**

CPU2017 License: 001176


Test Date: Apr-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

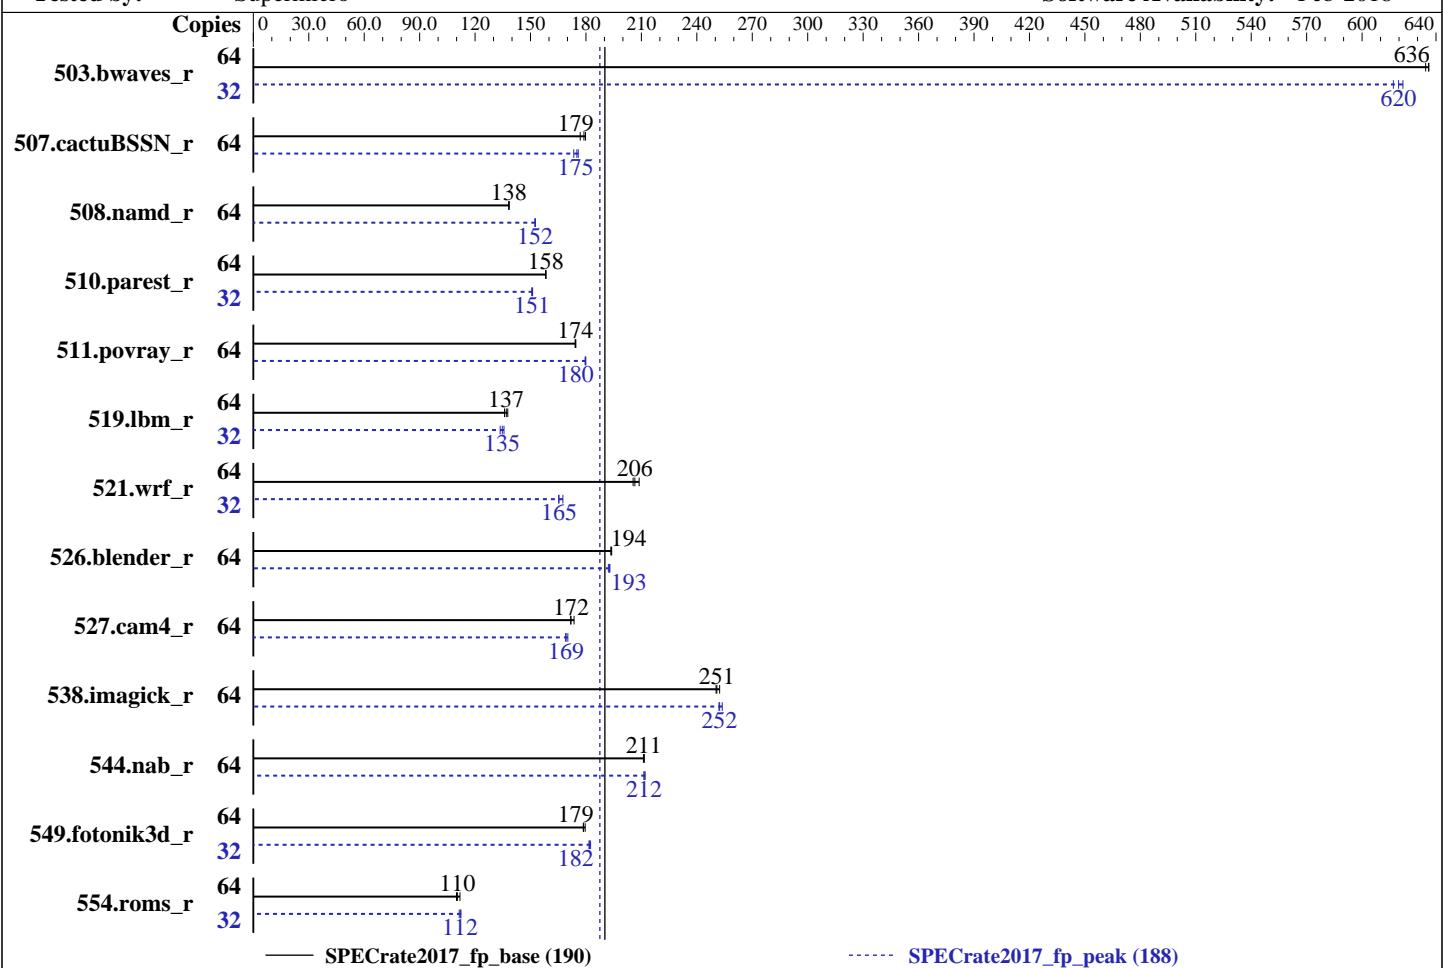

### Hardware

CPU Name: AMD EPYC 7351  
Max MHz.: 2900  
Nominal: 2400  
Enabled: 32 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 64 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 64 MB I+D on chip per chip, 8 MB shared / 2 cores  
Other: None  
Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)  
Storage: 1 x 500 GB SATAIII, 7200 RPM  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
Compiler: kernel 4.4.114-94.11-default  
C/C++: Version 1.0.0 of AOCC  
Fortran: Version 4.8.2 of GCC  
Parallel: No  
Firmware: Supermicro BIOS version 1.1 released Feb-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc general purpose malloc implementation V4.5.0



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7351)

**SPECrate2017\_fp\_base = 190**

**SPECrate2017\_fp\_peak = 188**

CPU2017 License: 001176

Test Date: Apr-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	<b>1009</b>	<b>636</b>	1009	636	1012	634	32	516	622	<b>518</b>	<b>620</b>	520	617		
507.cactusBSSN_r	64	458	177	<b>453</b>	<b>179</b>	451	180	64	467	173	461	176	<b>463</b>	<b>175</b>		
508.namd_r	64	<b>440</b>	<b>138</b>	440	138	439	138	64	<b>399</b>	<b>152</b>	398	153	399	152		
510.parest_r	64	1057	158	1059	158	<b>1058</b>	<b>158</b>	32	554	151	556	151	<b>554</b>	<b>151</b>		
511.povray_r	64	858	174	<b>857</b>	<b>174</b>	856	175	64	832	180	830	180	<b>832</b>	<b>180</b>		
519.lbm_r	64	496	136	<b>493</b>	<b>137</b>	490	138	32	<b>250</b>	<b>135</b>	249	136	252	134		
521.wrf_r	64	687	209	698	206	<b>694</b>	<b>206</b>	32	428	168	434	165	<b>433</b>	<b>165</b>		
526.blender_r	64	<b>503</b>	<b>194</b>	504	194	503	194	64	505	193	507	192	<b>506</b>	<b>193</b>		
527.cam4_r	64	652	172	645	174	<b>651</b>	<b>172</b>	64	<b>661</b>	<b>169</b>	658	170	662	169		
538.imagick_r	64	631	252	<b>635</b>	<b>251</b>	636	250	64	627	254	632	252	<b>631</b>	<b>252</b>		
544.nab_r	64	<b>510</b>	<b>211</b>	510	211	509	212	64	<b>509</b>	<b>212</b>	508	212	510	211		
549.fotonik3d_r	64	<b>1396</b>	<b>179</b>	1397	179	1389	180	32	683	183	686	182	<b>686</b>	<b>182</b>		
554.roms_r	64	925	110	<b>921</b>	<b>110</b>	909	112	32	<b>454</b>	<b>112</b>	456	111	452	112		

**SPECrate2017\_fp\_base = 190**

**SPECrate2017\_fp\_peak = 188**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

'numactl' was used to bind copies to the cores.

See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7351)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_fp\_base = 190

SPECrate2017\_fp\_peak = 188

Test Date: Apr-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32;"  
MALLOC_CONF = "lg_chunk:28"
```

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:

<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at  
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>  
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.  
jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.  
lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to 2^21 = 2MiB.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Determinism Slider = Power

Sysinfo program /home/cpu2017/bin/sysinfo

```
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-769d Mon Apr 2 21:05:10 2018
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7351 16-Core Processor  
2 "physical id"s (chips)
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7351)

SPECrate2017\_fp\_base = 190

SPECrate2017\_fp\_peak = 188

CPU2017 License: 001176

Test Date: Apr-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

## Platform Notes (Continued)

```
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 2
Core(s) per socket: 16
Socket(s): 2
NUMA node(s): 8
Vendor ID: AuthenticAMD
CPU family: 23
Model: 1
Model name: AMD EPYC 7351 16-Core Processor
Stepping: 2
CPU MHz: 2400.000
CPU max MHz: 2400.0000
CPU min MHz: 1200.0000
BogoMIPS: 4799.64
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 64K
L2 cache: 512K
L3 cache: 8192K
NUMA node0 CPU(s): 0-3,32-35
NUMA node1 CPU(s): 4-7,36-39
NUMA node2 CPU(s): 8-11,40-43
NUMA node3 CPU(s): 12-15,44-47
NUMA node4 CPU(s): 16-19,48-51
NUMA node5 CPU(s): 20-23,52-55
NUMA node6 CPU(s): 24-27,56-59
NUMA node7 CPU(s): 28-31,60-63
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmpfperf eagerfpu dni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skininit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7351)

SPECrate2017\_fp\_base = 190

SPECrate2017\_fp\_peak = 188

CPU2017 License: 001176

Test Date: Apr-2018

Test Sponsor: Supermicro

Hardware Availability: Jun-2017

Tested by: Supermicro

Software Availability: Feb-2018

## Platform Notes (Continued)

```
flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
ibpb overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 128846 MB
node 0 free: 128665 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 129021 MB
node 1 free: 128858 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 129021 MB
node 2 free: 128883 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 129021 MB
node 3 free: 128878 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 129021 MB
node 4 free: 128903 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 129021 MB
node 5 free: 128905 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 129021 MB
node 6 free: 128903 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 129019 MB
node 7 free: 128903 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  16  16  16  32  32  32  32
  1: 16  10  16  16  32  32  32  32
  2: 16  16  10  16  32  32  32  32
  3: 16  16  16  10  32  32  32  32
  4: 32  32  32  32  10  16  16  16
  5: 32  32  32  32  16  10  16  16
  6: 32  32  32  32  16  16  10  16
  7: 32  32  32  32  16  16  16  10
```

From /proc/meminfo
MemTotal: 1056761176 kB

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7351)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_fp\_base = 190

SPECrate2017\_fp\_peak = 188

Test Date: Apr-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

## Platform Notes (Continued)

HugePages\_Total: 0  
Hugepagesize: 2048 kB

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-769d 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 2 11:25
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   422G   25G  397G   6% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.1 02/07/2018

Memory:

16x NO DIMM NO DIMM  
16x Samsung M386A8K40BM2-CTD 64 GB 4 rank 2667

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
 CC 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
 -----
 AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7351)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_fp\_base = 190

SPECrate2017\_fp\_peak = 188

Test Date: Apr-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

## Compiler Version Notes (Continued)

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

CXXC 508.namd\_r(base, peak) 510.parest\_r(base, peak)

=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

CC 511.povray\_r(base, peak) 526.blender\_r(base, peak)

=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====

FC 507.cactuBSSN\_r(base, peak)

=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG: ) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7351)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_fp\_base = 190

SPECrate2017\_fp\_peak = 188

Test Date: Apr-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

## Compiler Version Notes (Continued)

You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====

```
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base,
peak)
```

=====

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====

```
CC 521.wrf_r(base, peak) 527.cam4_r(base, peak)
```

=====

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7351)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_fp\_base = 190

SPECrate2017\_fp\_peak = 188

Test Date: Apr-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-inline-threshold=1000 -z muldefs -ljemalloc

C++ benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100  
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs  
-ljemalloc

Fortran benchmarks:

-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madx  
-funroll-loops -ffast-math -z muldefs -fplugin=dragonegg.so

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7351)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_fp\_base = 190

SPECrate2017\_fp\_peak = 188

Test Date: Apr-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
-lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(clang) -ffast-math -march=znver1
-fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays
-mno-avx2 -inline-threshold=1000 -O3(gfortran) -mavx -madx
-funroll-loops -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
-lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -finline-aggressive -z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3(clang) -ffast-math -march=znver1
-fstruct-layout=2 -mllvm -unroll-threshold=100 -fremap-arrays
-mno-avx2 -inline-threshold=1000 -finline-aggressive -O3(gfortran)
-mavx -madx -funroll-loops -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -disable-vect-cmp" -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7351)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_fp\_base = 190

SPECrate2017\_fp\_peak = 188

Test Date: Apr-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

## Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000
-ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast
-march=znver1 -finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-O3(gfortran) -O3(clang) -mavx2 -madx -funroll-loops -ffast-math
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -O3(clang) -mavx -ffast-math
-O3(gfortran) -funroll-loops -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -O3(gfortran) -O3(clang) -mavx2
-madx -funroll-loops -ffast-math -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option="
-inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2023US-TR4  
(H11DSU-iN , AMD EPYC 7351)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECrate2017\_fp\_base = 190

SPECrate2017\_fp\_peak = 188

Test Date: Apr-2018

Hardware Availability: Jun-2017

Software Availability: Feb-2018

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-fno -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast
-march=znver1 -fstruct-layout=3 -mlvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000
-finline-aggressive -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-fno -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast
-march=znver1 -fstruct-layout=3 -mlvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000
-finline-aggressive -O3 -mavx2 -madx -funroll-loops -ffast-math
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-inline-threshold:1000" -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revC.2018-03-20.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revC.2018-03-20.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-04-02 09:05:10-0400.

Report generated on 2019-02-21 15:45:07 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-12.